

SACB- 6/3-L-M16-M8 HD - Distributor box



1197413

<https://www.phoenixcontact.com/us/products/1197413>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, application: Standard, connection method: M8 socket Metal, number of slots: 6, number of positions: 3, coding: A, slot assignment: single, status display: Yes, pnp; master cable connection: M16 plug connection 90°, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics

Commercial data

Item number	1197413
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF40
Product key	BF3BCB
GTIN	4063151257408
Weight per piece (including packing)	118.5 g
Weight per piece (excluding packing)	118 g
Customs tariff number	85444290
Country of origin	DE

SACB- 6/3-L-M16-M8 HD - Distributor box



1197413

<https://www.phoenixcontact.com/us/products/1197413>

Technical data

Notes

Assembly note	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
Note on application	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

Product properties

Product type	Distributor box
Application	Standard
Number of positions	3
Number of slots	6
Coding	A
LED	yes

System properties

Local diagnostics	
Monitored function	Supply voltage per module
Optical representation	Green LED

Electrical properties

Max. operating voltage U_{max}	30 V DC
Local diagnostics	Supply voltage per module Green LED
	Status display I/O Yellow LED
Nominal voltage U_N	24 V DC
Rated current, total	6 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	2 A

Connection data

Conductor connection	
Sensor/actuator connection system	M8 socket
Tightening torque slot sensor/actuator cable	0.2 Nm
Tightening torque - master cable - plug connection	1.5 Nm
Tightening torque of mounting screw for fixing the housing	0.8 Nm

Pin assignment	
Slot/position = Wire color or connection	1 / 4 (A) = P
	2 / 4 (A) = J
	3 / 4 (A) = T
	4 / 4 (A) = S

SACB- 6/3-L-M16-M8 HD - Distributor box



1197413


<https://www.phoenixcontact.com/us/products/1197413>

	5 / 4 (A) = G
	6 / 4 (A) = R
	1-6 / 1 (+ 24 V) = A+M
	1-6 / 3 (0 V) = L+U

Signaling

Status display present	Yes
------------------------	-----

Dimensions

Dimensional drawing	
Width	30 mm
Height	27 mm
Length	112.4 mm

Material specifications

Material Threaded sleeve	Cu alloy
Material Housing	PBT
Material Molding compound	PUR
Seal material O-ring	FKM
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PBT
Material of contact, master cable side	CU alloy

Cable/line

Connection method	M16 plug connection
-------------------	---------------------

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP67
Ambient temperature (operation)	-20 °C ... 80 °C

Standards and regulations

Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104

SACB- 6/3-L-M16-M8 HD - Distributor box


1197413

<https://www.phoenixcontact.com/us/products/1197413>



Drawings

Schematic diagram

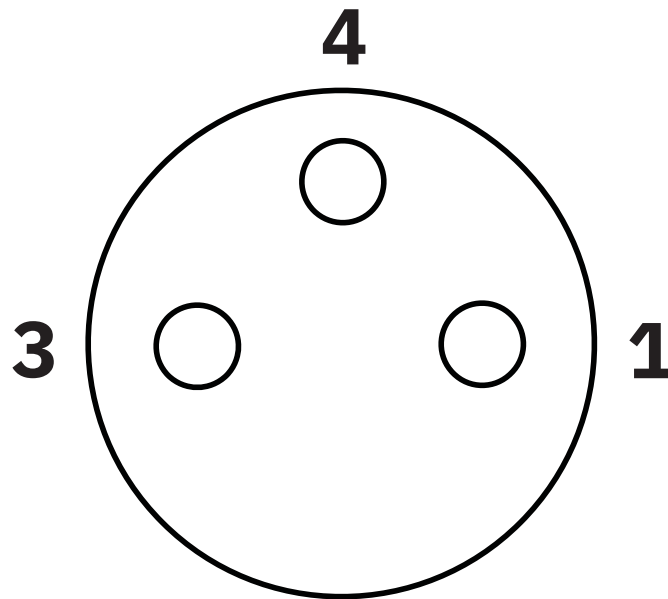

M8 slot, socket, 3-pos.


SACB- 6/3-L-M16-M8 HD - Distributor box




1197413

<https://www.phoenixcontact.com/us/products/1197413>

Dimensional drawing

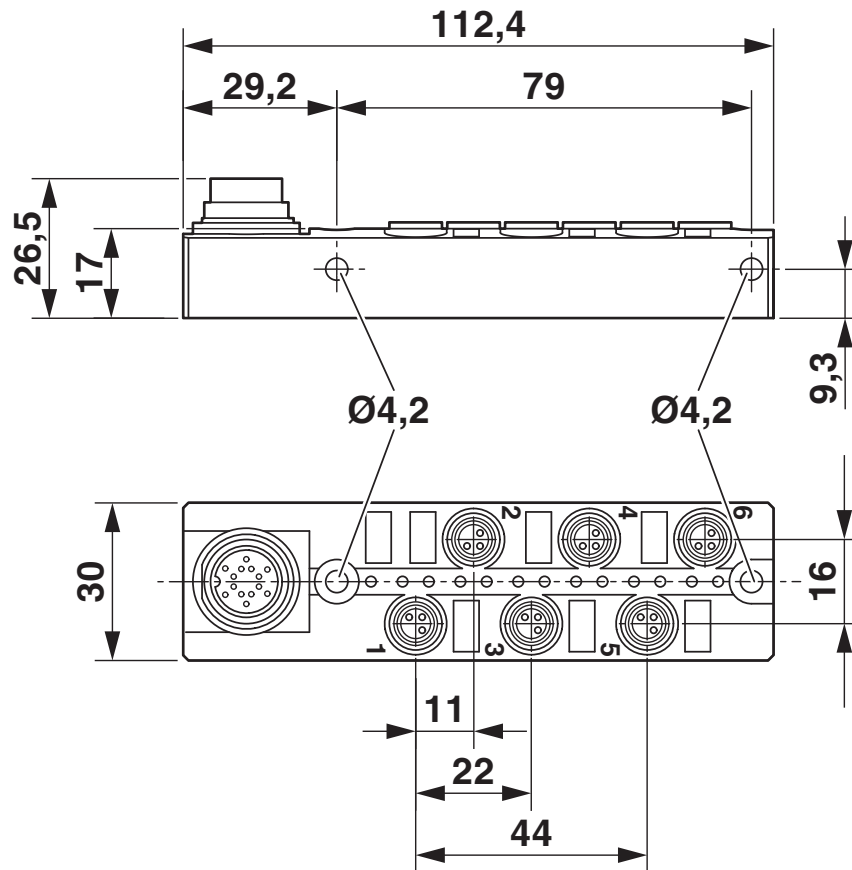


Schematic diagram

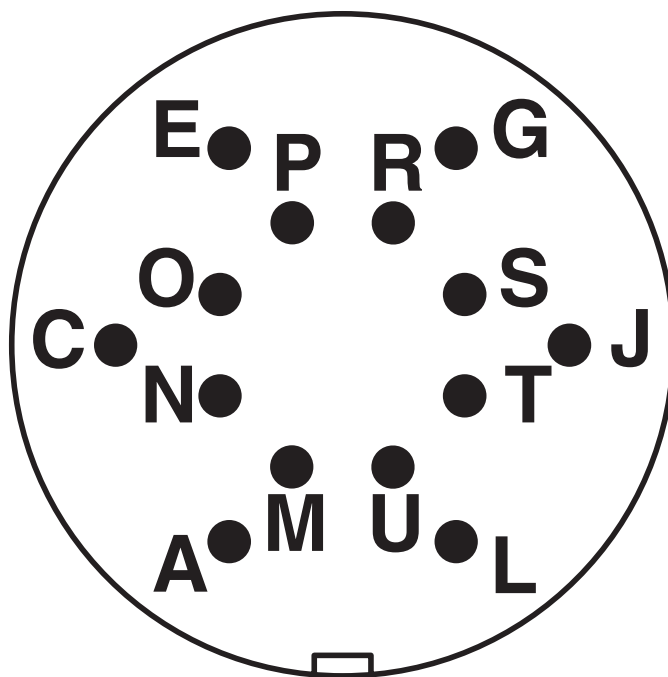

M16 plug connection pin, 14-pos.

Circuit diagram

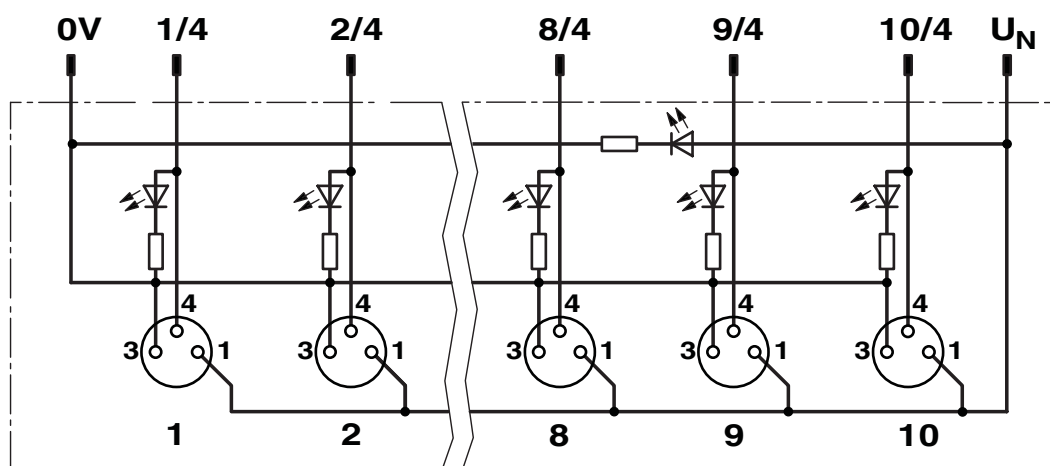

SACB- 6/3-L-M16-M8 HD - Distributor box



1197413

<https://www.phoenixcontact.com/us/products/1197413>

Classifications

ECLASS

ECLASS-11.0	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111

ETIM

ETIM 9.0	EC003558
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SACB- 6/3-L-M16-M8 HD - Distributor box



1197413

<https://www.phoenixcontact.com/us/products/1197413>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

SACB- 6/3-L-M16-M8 HD - Distributor box



1197413

<https://www.phoenixcontact.com/us/products/1197413>

Accessories

SAC-10P- 5,0-PUR/M16FR - Master cable

1693704

<https://www.phoenixcontact.com/us/products/1693704>



Master cable, application: Sensor/actuator box, connection method: M8 socket Metal, number of slots: 6, number of positions: 10, slot assignment: single, status display: No; master cable connection: M16 plug connection, PUR/PVC, cable length: 5 m, shielding: no, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1260750

SAC-10P-10,0-PUR/M16FR - Master cable

1693717

<https://www.phoenixcontact.com/us/products/1693717>



Master cable, application: Sensor/actuator box, connection method: M8 socket Metal, number of slots: 6, number of positions: 10, slot assignment: single, status display: No; master cable connection: M16 plug connection, PUR/PVC, cable length: 10 m, shielding: no, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1260749

SACB- 6/3-L-M16-M8 HD - Distributor box

1197413

<https://www.phoenixcontact.com/us/products/1197413>



UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

SACC-M16FS-14CON-M - Connector

1500554

<https://www.phoenixcontact.com/us/products/1500554>



M16 socket, 14-pos., with solder connection, freely configurable, straight, for a 6.0 mm conductor diameter ... 8.0 mm

SACB- 6/3-L-M16-M8 HD - Distributor box

1197413

<https://www.phoenixcontact.com/us/products/1197413>



SACC-M16FR-14CON-M - Connector

1500253

<https://www.phoenixcontact.com/us/products/1500253>

M16 socket, 14-pos., with solder connection, freely configurable, angled, for a 6.0 mm conductor diameter ... 8.0 mm



PROT-M8 - Screw plug

1682540

<https://www.phoenixcontact.com/us/products/1682540>

An M8 screw plug for the unoccupied M8 sockets of the sensor/actuator cable, boxes and flush-type connectors



SACB- 6/3-L-M16-M8 HD - Distributor box



1197413

<https://www.phoenixcontact.com/us/products/1197413>

TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/us/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/us/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

SACB- 6/3-L-M16-M8 HD - Distributor box



1197413

<https://www.phoenixcontact.com/us/products/1197413>

SACC BIT M8-D12 - Tool

1208474

<https://www.phoenixcontact.com/us/products/1208474>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 12 mm, for 4 mm hexagonal drive

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com