

1556304

https://www.phoenixcontact.com/us/products/1556304

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Universal, 17-position, Pin, straight, M12-SPEEDCON, coding: A, on free cable end, Front mounting, M16 x 1.5, Individual wires, cable length: 0.5 m, 0.14 mm², TPE litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240048

Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut
- · SPEEDCON fast locking system reduces cabling times

Commercial data

Item number	1556304
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCEB
Catalog page	Page 37 (C-2-2019)
GTIN	4046356176767
Weight per piece (including packing)	31.5 g
Weight per piece (excluding packing)	31 g
Customs tariff number	85444290
Country of origin	DE



1556304

https://www.phoenixcontact.com/us/products/1556304

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
General	Contact connection method: Crimp connection

Mounting

Mounting type	Front mounting M16 x 1.5
---------------	--------------------------

Product properties

Product type	Circular connectors (device side)
Application	Signal
Sensor type	Universal
Number of positions	17
No. of cable outlets	1
Shielded	no
Coding	A
Thread type	M12
Insulation characteristics	

II 3

Degree of pollution Material specifications

Overvoltage category

Flammability rating according to UL 94	V0
Seal material	FKM
Material of grip body	Zinc die-cast, nickel-plated
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated
Conductor material	Tin-plated Cu litz wires

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	30 V (AC)
	30 V (DC)



1556304

https://www.phoenixcontact.com/us/products/1556304

Nominal current I _N	1.5 A
Max. conductor resistance	57.6 mΩ/m

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Pin
Conductor cross section	0.14 mm²
Tightening torque	3 Nm 4 Nm (Installation-side)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Connection 2

Head design	free cable end	

Cable/line

Cable length	0.5 m
Cable type	TPE litz wire
Signal type/category	Universal
Wire diameter incl. insulation	1.1 mm ±0.05 mm
Single wire, color	brown, blue, white, green, pink, yellow, black, gray, red, violet, gray/pink, red/blue, white/green, brown/green, white/yellow, yellow/brown, white/gray
Cable cross section	0.14 mm²
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Material wire insulation	TPE
Thickness, insulation	0.21 mm (Core insulation)
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	≤ 57.6 mΩ/m
Cable insulation resistance	≥ 20 MΩ*km



1556304

https://www.phoenixcontact.com/us/products/1556304

Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)

Standards and regulations

M12


Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101




1556304

https://www.phoenixcontact.com/us/products/1556304

Drawings

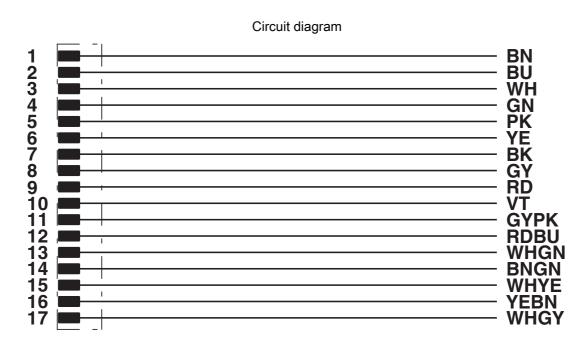



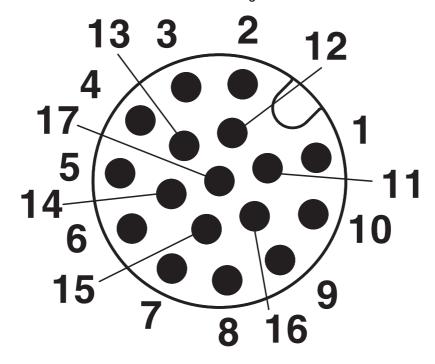

Pin assignment M12 male connector, 17-pos., male side view



1556304

https://www.phoenixcontact.com/us/products/1556304

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1556304

c 911 us	cULus Recogniz Approval ID: E221474	zed 4-20140616			
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		30 V	1.5 A	26 - 26	-

71	UL Recognized Approval ID: E118976-2	0100522			
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		30 V	1.5 A	26 - 26	-



1556304

https://www.phoenixcontact.com/us/products/1556304

Classifications

UNSPSC 21.0

ECLASS

27440102		
27440116		
27440116		
ETIM		
EC002635		
UNSPSC		

39121400



1556304

https://www.phoenixcontact.com/us/products/1556304

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes	
Exemption	6(c)	
China RoHS		
Environment friendly use period (EFUP)	EFUP-50	
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	
EU REACH SVHC		
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)	
SCIP	5f970fac-7d51-4674-af50-6acd45552b02	



1556304

https://www.phoenixcontact.com/us/products/1556304

Accessories

SACC-E-MU-M16 - Flat nut

1504097

https://www.phoenixcontact.com/us/products/1504097

Flat nut, Screw mounting, M16 x 1.5, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239863



SACC-M16-SEAL CLM - Flat gasket

1430394

https://www.phoenixcontact.com/us/products/1430394

M16 flat gasket for M12 flush-type connectors with M16 fastening thread





1556304

https://www.phoenixcontact.com/us/products/1556304

PROT-M12 FS - Sealing cap

1560251

https://www.phoenixcontact.com/us/products/1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

PROT-M12 FS-M - Sealing cap

1430488

https://www.phoenixcontact.com/us/products/1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com