

2907198

<https://www.phoenixcontact.com/us/products/2907198>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing, Lower housing part with metal foot catch, tall design, with vents, width: 35.2 mm, height: 99 mm, depth: 107.3 mm, color: green (similar RAL 6021), cross connection: without bus connector, number of positions cross connector: not relevant

Your advantages

- Tool-free mounting
- Available in overall widths from 12.5 mm ... 90 mm, modular extension is possible
- Flammability rating V0 in accordance with UL 94
- Variety of connection technology
- Can be mounted on the DIN rail
- With integrated or DIN-rail-mountable bus connector as an option

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2907198             |
| Packing unit                         | 10 pc               |
| Minimum order quantity               | 10 pc               |
| Sales key                            | AC08                |
| Product key                          | ACHAAA              |
| Catalog page                         | Page 660 (C-1-2013) |
| GTIN                                 | 4017918131418       |
| Weight per piece (including packing) | 60.56 g             |
| Weight per piece (excluding packing) | 45.472 g            |
| Customs tariff number                | 85389099            |
| Country of origin                    | DE                  |

# ME 35 UT GN - Mounting base housing



2907198

<https://www.phoenixcontact.com/us/products/2907198>

## Technical data


### Notes

|               |                                                             |
|---------------|-------------------------------------------------------------|
| Assembly note | Refer to the data sheet for the range in the download area. |
|---------------|-------------------------------------------------------------|

### Product properties

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| Product type                 | Enclosure bottom part                                                          |
| Housing type                 | DIN rail housing                                                               |
| Housing series               | ME                                                                             |
| Product family               | ME 35..                                                                        |
| Type                         | Lower housing parts with vents, housing cover necessary to complete the module |
| Max. number of positions     | 0)                                                                             |
| Type                         | Lower housing part with metal foot catch, tall design                          |
| Ventilation openings present | yes                                                                            |

### Dimensions

|                                                                |                                                                                      |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing                                            |  |
| Width                                                          | 35.2 mm                                                                              |
| Height                                                         | 99 mm                                                                                |
| Depth                                                          | 107.3 mm                                                                             |
| Depth from top edge of DIN rail                                | 100.7 mm                                                                             |
| Depth from top edge of DIN rail to support point on upper part | 68.5 mm                                                                              |

### PCB design

|               |                   |
|---------------|-------------------|
| PCB thickness | 1.4 mm ... 1.8 mm |
|---------------|-------------------|

### Material specifications

|                                        |                  |
|----------------------------------------|------------------|
| Color (Housing)                        | green (RAL 6021) |
| Flammability rating according to UL 94 | V0               |
| CTI according to IEC 60112             | 600              |
| Housing material                       | Polyamide        |
| Surface characteristics                | untreated        |

### Environmental and real-life conditions

#### Power dissipation single housing for 20 °C

|                     |       |
|---------------------|-------|
| Ambient temperature | 20 °C |
|---------------------|-------|

# ME 35 UT GN - Mounting base housing



2907198

<https://www.phoenixcontact.com/us/products/2907198>

|                   |          |
|-------------------|----------|
| Reduction factor  | 1        |
| Mounting position | vertical |
| Power dissipation | 7.9 W    |

## Power dissipation single housing for 30 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 30 °C    |
| Reduction factor    | 0.91     |
| Mounting position   | vertical |
| Power dissipation   | 7.2 W    |

## Power dissipation single housing for 40 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 40 °C    |
| Reduction factor    | 0.81     |
| Mounting position   | vertical |
| Power dissipation   | 6.4 W    |

## Power dissipation single housing for 50 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 50 °C    |
| Reduction factor    | 0.7      |
| Mounting position   | vertical |
| Power dissipation   | 5.5 W    |

## Power dissipation single housing for 60 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 60 °C    |
| Reduction factor    | 0.57     |
| Mounting position   | vertical |
| Power dissipation   | 4.5 W    |

## Power dissipation single housing for 70 °C

|                     |          |
|---------------------|----------|
| Ambient temperature | 70 °C    |
| Reduction factor    | 0.49     |
| Mounting position   | vertical |
| Power dissipation   | 3.9 W    |

## Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.15 mm (10 Hz ... 58.1 Hz) |
| Acceleration           | 2g (58.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |
| Test directions        | X-, Y- and Z-axis           |

## Glow-wire test

|                  |                        |
|------------------|------------------------|
| Specification    | IEC 60695-2-11:2014-02 |
| Temperature      | 850 °C                 |
| Time of exposure | 30 s                   |

# ME 35 UT GN - Mounting base housing



2907198

<https://www.phoenixcontact.com/us/products/2907198>

## Thermal stability / ball thrust test

|               |                        |
|---------------|------------------------|
| Specification | IEC 60695-10-2:2014-02 |
| Temperature   | 125 °C                 |
| Test duration | 1 h                    |
| Force         | 20 N                   |

## Mechanical strength / tumbling barrel

|                |                     |
|----------------|---------------------|
| Specification  | IEC 60998-1:2002-12 |
| Height of fall | 50 cm               |
| Frequency      | 10                  |

## Shocks

|                                |                                   |
|--------------------------------|-----------------------------------|
| Specification                  | IEC 60068-2-27:2008-02            |
| Pulse shape                    | Half-sine                         |
| Acceleration                   | 15g                               |
| Shock duration                 | 11 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |

## Degree of protection (IP code)

|               |                                                   |
|---------------|---------------------------------------------------|
| Specification | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
|---------------|---------------------------------------------------|

## Ambient conditions

|                                         |                                                    |
|-----------------------------------------|----------------------------------------------------|
| Max. IP code to attain                  | IP20                                               |
| Ambient temperature (operation)         | -40 °C ... 105 °C (depending on power dissipation) |
| Ambient temperature (storage/transport) | -40 °C ... 55 °C                                   |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                   |
| Relative humidity (storage/transport)   | 80 %                                               |

## PCB data

|                       |                                           |
|-----------------------|-------------------------------------------|
| Number of PCB holders | 2                                         |
| Type of PCB mount     | Insertion (optional latching by PCB stop) |
| Thickness of the PCB  | 1.4 mm ... 1.8 mm                         |

## Mounting

|                   |                                |
|-------------------|--------------------------------|
| Mounting type     | DIN rail mounting              |
| Mounting position | Vertical (horizontal DIN rail) |

## Packaging specifications

|                      |                     |
|----------------------|---------------------|
| Type of packaging    | packed in cardboard |
| Outer packaging type | Carton              |

# ME 35 UT GN - Mounting base housing


2907198

<https://www.phoenixcontact.com/us/products/2907198>



## Drawings

Dimensional drawing

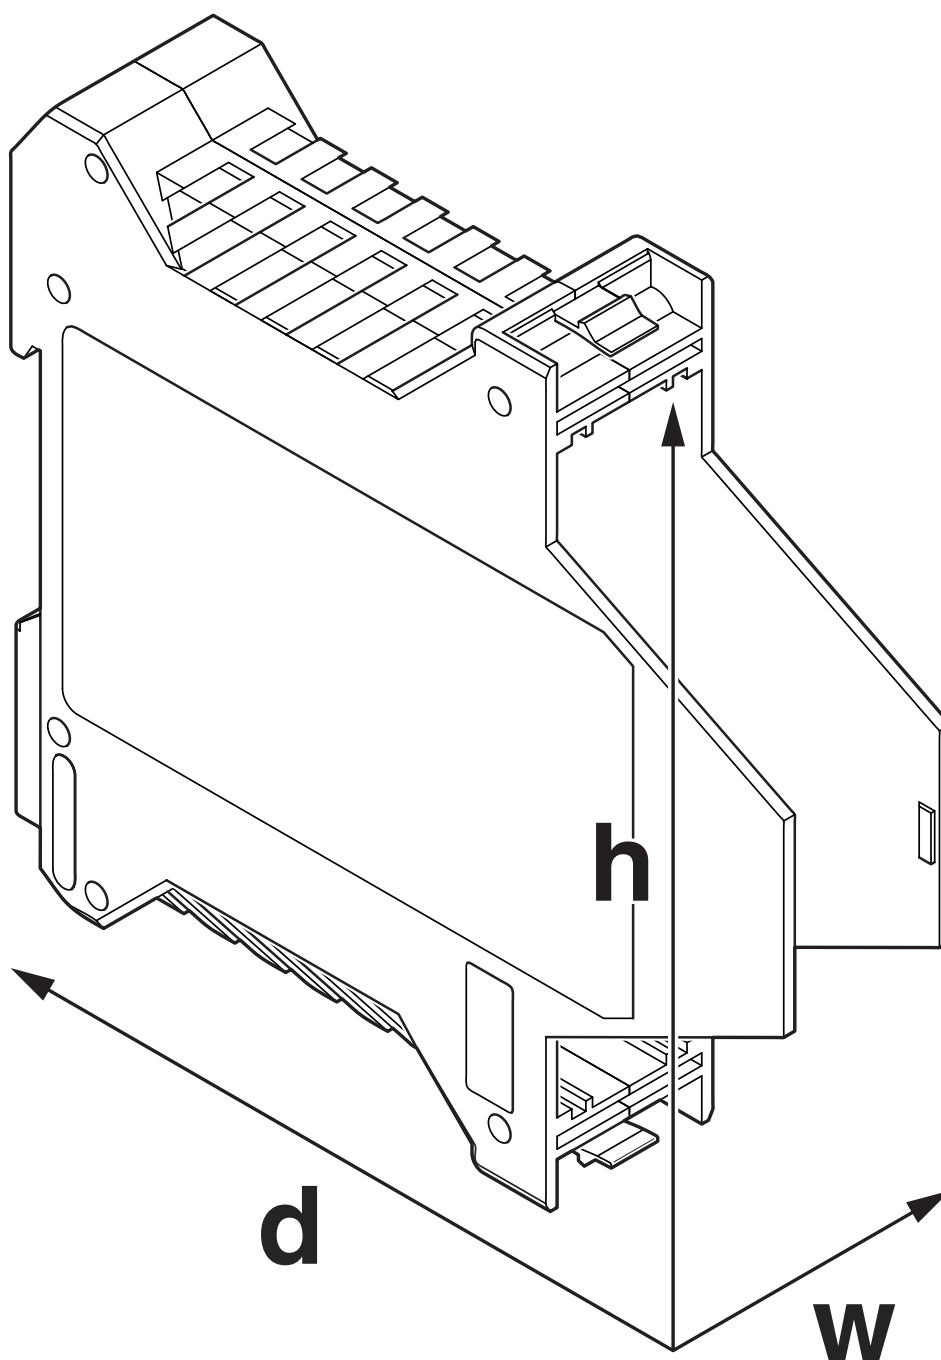

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

# ME 35 UT GN - Mounting base housing



2907198

<https://www.phoenixcontact.com/us/products/2907198>

## Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2907198>



**UL Recognized**

Approval ID: FILE E 240868

# ME 35 UT GN - Mounting base housing



2907198

<https://www.phoenixcontact.com/us/products/2907198>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27182702 |
| ECLASS-13.0 | 27190601 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001031 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

# ME 35 UT GN - Mounting base housing



2907198

<https://www.phoenixcontact.com/us/products/2907198>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# ME 35 UT GN - Mounting base housing

2907198

<https://www.phoenixcontact.com/us/products/2907198>



## Mandatory accessories

### ME 17,5 OT-MSTBO GN - Upper housing part

2906827

<https://www.phoenixcontact.com/us/products/2906827>

DIN rail housing, Upper housing part for connectors with header, width: 17.6 mm, height: 99 mm, depth: 45.85 mm, color: green (similar RAL 6021)



---

### ME 17,5 OT-MKDSO GN - Upper housing part

2906843

<https://www.phoenixcontact.com/us/products/2906843>

DIN rail housing, Upper housing part for PCB terminal blocks with screw connection, width: 17.6 mm, height: 99 mm, depth: 45.85 mm, color: green (similar RAL 6021)



# ME 35 UT GN - Mounting base housing

2907198

<https://www.phoenixcontact.com/us/products/2907198>



## ME 35 OT-MSTBO GN - Upper housing part

2709639

<https://www.phoenixcontact.com/us/products/2709639>

DIN rail housing, Upper housing part for connectors with header, width: 35.2 mm, height: 99 mm, depth: 45.85 mm, color: green (similar RAL 6021)



---

## ME 17,5 OT-MSTBO SET - Upper housing part

2907431

<https://www.phoenixcontact.com/us/products/2907431>

DIN rail housing, Set comprised of upper housing part, 4 PCB headers (3-pos.), and 4 PCB terminal blocks with screw connection (3-pos.), width: 17.6 mm, height: 99 mm, depth: 45.85 mm, color: green (similar RAL 6021)



# ME 35 UT GN - Mounting base housing

2907198

<https://www.phoenixcontact.com/us/products/2907198>



## ME 17,5 OT-MKDSO SET - Upper housing part

2907460

<https://www.phoenixcontact.com/us/products/2907460>

DIN rail housing, Set comprised of upper housing part and 4 PCB terminal blocks (3-pos.) with screw connection, width: 17.6 mm, height: 99 mm, depth: 45.85 mm, color: green (similar RAL 6021)



---

## ME 35 OT-MSTBO SET - Upper housing part

2707738

<https://www.phoenixcontact.com/us/products/2707738>

DIN rail housing, Set comprised of upper housing part, 8 PCB headers (3-pos.), and 8 PCB terminal blocks with screw connection (3-pos.), width: 35.2 mm, height: 99 mm, depth: 45.85 mm, color: green (similar RAL 6021)



---

## Accessories

# ME 35 UT GN - Mounting base housing

2907198

<https://www.phoenixcontact.com/us/products/2907198>



## ME LPZS - PCB stop

2906911

<https://www.phoenixcontact.com/us/products/2906911>



DIN rail housing, after approx. 4 cm, the ME LPZS PCB pull-out stop prevents the PCB from being removed completely and locks the PCB in place

---

## ME MF 17,5 - Base latch

2908281

<https://www.phoenixcontact.com/us/products/2908281>

Metal foot catch with spring, for intermediate elements.



# ME 35 UT GN - Mounting base housing

2907198

<https://www.phoenixcontact.com/us/products/2907198>



## ME-SAS - Shield connection clamp

2853899

<https://www.phoenixcontact.com/us/products/2853899>

Shield connection clamp for terminal points starting from 2.5 mm<sup>2</sup>




---

## ME LP - PCB

2906908

<https://www.phoenixcontact.com/us/products/2906908>

PCB, for custom fitting, with contact to DIN rail (EN 60715)



# ME 35 UT GN - Mounting base housing

2907198

<https://www.phoenixcontact.com/us/products/2907198>



## EML (44X76)R-ME - Label for ME ... UT ... housing

0828130

<https://www.phoenixcontact.com/us/products/0828130>



Label for ME ... UT ... housing, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, mounting type: adhesive, lettering field size: 44 x 76 mm, Number of individual labels: 200

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)