

1668072

<https://www.phoenixcontact.com/us/products/1668072>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, coding: A, PIN 2+4 bridged, cable length: 1.5 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Efficient integration of bridging functions directly in the connector

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1668072             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF03                |
| Product key                          | BF1CBA              |
| Catalog page                         | Page 188 (C-2-2019) |
| GTIN                                 | 4017918136611       |
| Weight per piece (including packing) | 44.1 g              |
| Weight per piece (excluding packing) | 44 g                |
| Customs tariff number                | 85444290            |
| Country of origin                    | PL                  |

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## Technical data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Application          | Standard              |
| Number of positions  | 3                     |
| No. of cable outlets | 1                     |
| Shielded             | no                    |
| Coding               | A                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Seal material                          | NBR                                         |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 250 V AC                   |
|                       | 250 V DC                   |
| Nominal current $I_N$ | 4 A                        |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | No |
| Status display present | No |

### Connection data

#### Conductor connection

|                   |                        |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|-------------------|------------------------|

### Connector

#### Connection 1

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

|      |                |
|------|----------------|
| Type | free cable end |
|------|----------------|


## Connection 2

|             |                     |
|-------------|---------------------|
| Type        | Socket straight M12 |
| Coding type | A                   |

## Cable/line

|              |       |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

## PUR halogen-free black [PUR]

|                                               |                                                                                    |
|-----------------------------------------------|------------------------------------------------------------------------------------|
| Dimensional drawing                           |  |
| Cable weight                                  | 23 kg/km                                                                           |
| UL AWM Style                                  | 20549                                                                              |
| Number of positions                           | 3                                                                                  |
| Shielded                                      | no                                                                                 |
| Cable type                                    | PUR halogen-free black [PUR]                                                       |
| Conductor structure signal line               | 42x 0.10 mm                                                                        |
| AWG signal line                               | 22                                                                                 |
| Conductor cross section                       | 3x 0.34 mm <sup>2</sup> (Signal line)                                              |
| Wire diameter incl. insulation                | 1.27 mm ±0.02 mm (Signal line)                                                     |
| External cable diameter                       | 3.85 mm ±0.15 mm                                                                   |
| Outer sheath, material                        | PUR                                                                                |
| External sheath, color                        | black-gray RAL 7021                                                                |
| Conductor material                            | Bare Cu litz wires                                                                 |
| Material wire insulation                      | PP                                                                                 |
| Single wire, color                            | brown, blue, black                                                                 |
| Thickness, insulation                         | ≥ 0.21 mm (Core insulation)<br>approx. 0.50 mm (Outer cable sheath)                |
| Overall twist                                 | 3 wires, twisted                                                                   |
| Max. conductor resistance                     | max. 58 Ω/km (at 20 °C)                                                            |
| Insulation resistance                         | ≥ 100 GΩ*km (at 20 °C)                                                             |
| Nominal voltage, cable                        | ≤ 300 V                                                                            |
| Test voltage                                  | ≥ 3000 V                                                                           |
| Smallest bending radius, fixed installation   | 19 mm                                                                              |
| Smallest bending radius, movable installation | 38 mm                                                                              |
| Max. bending cycles                           | 10000000                                                                           |
| Bending radius                                | 38 mm                                                                              |
| Traversing path                               | 10 m                                                                               |

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

|                                 |                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Traversing rate                 | 3 m/s                                                                                                                                                          |
| Acceleration                    | 10 m/s <sup>2</sup>                                                                                                                                            |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                                                                                                                       |
| Flame resistance                | in accordance with UL 758/1581 FT2<br>DIN EN 60332-2-2 (20 s)                                                                                                  |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                                                                                                            |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents<br>hydrolysis and microbe resistant<br>partly UV-resistant (in accordance with DIN EN ISO 4892-2-A) |
| Special properties              | Flexible cable conduit capable<br>Silicone-free<br>Free of substances which would hinder coating with paint or varnish                                         |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)<br>-25 °C ... 80 °C (Cable, flexible installation)                                                                |

## Environmental and real-life conditions

### Ambient conditions


|                                 |                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Degree of protection            | IP65<br>IP67<br>IP68                                                                                                               |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket)<br>-40 °C ... 80 °C (cable, fixed installation)<br>-5 °C ... 80 °C (Cable, flexible installation) |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |


## Drawings

Schematic diagram

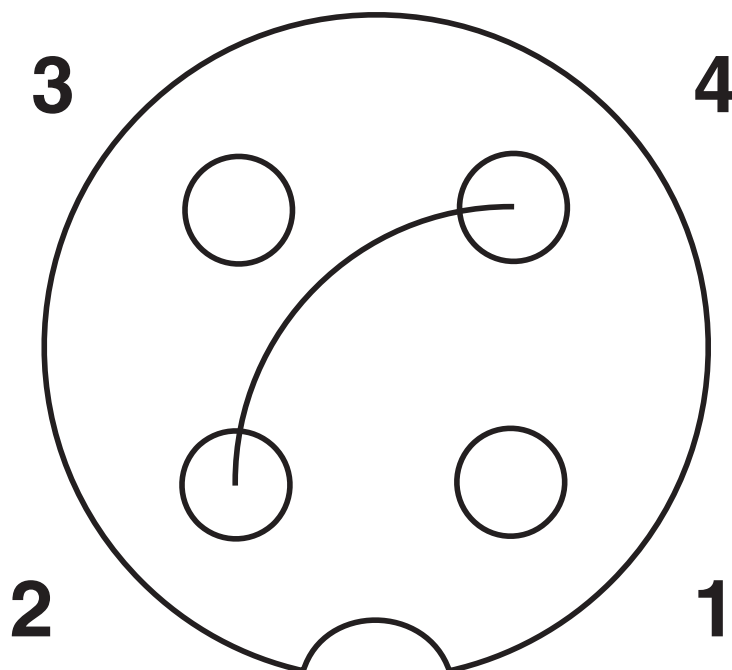

Pin assignment M12 socket, 3-pos., PIN 2+4 bridged, A-coded, view female side

Circuit diagram

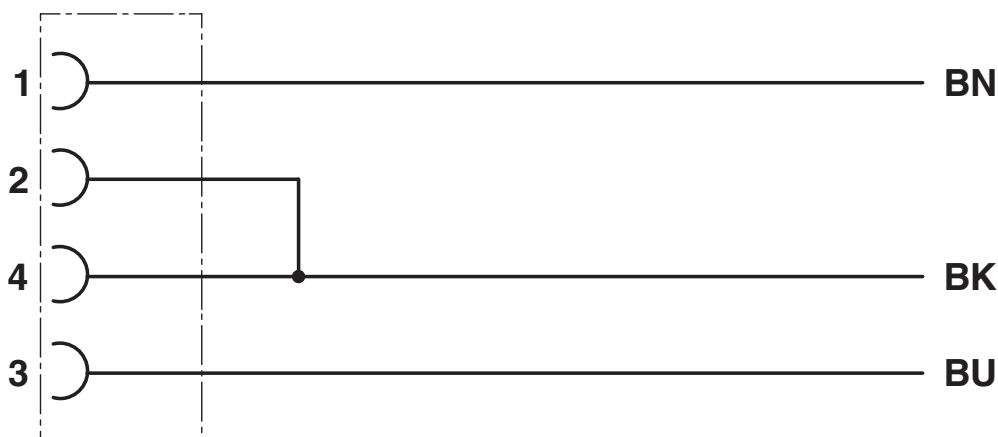


# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

Dimensional drawing

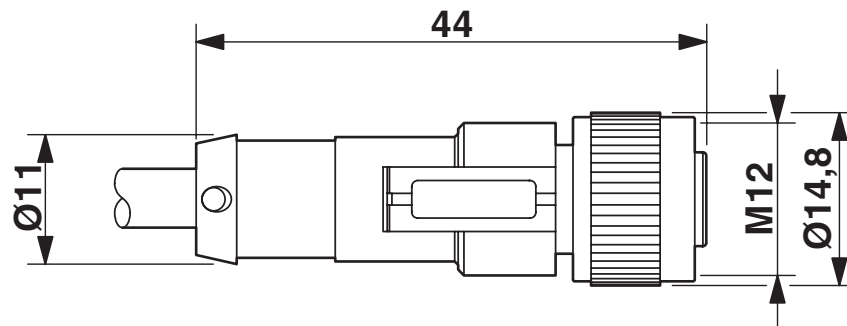

M12 x 1 socket, straight

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1668072>

|  |                                                |                                |                   |                               |
|--|------------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>UL Listed</b><br>Approval ID: FILE E 221474 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>                 | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 300 V                                          | 4 A                            | -                 | -                             |

|  |                                                 |                                |                   |                               |
|--|-------------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>cUL Listed</b><br>Approval ID: FILE E 221474 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>                  | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 300 V                                           | 4 A                            | -                 | -                             |

|  |                                                      |  |  |  |
|--|------------------------------------------------------|--|--|--|
|  | <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |  |  |
|  |                                                      |  |  |  |

|                     |  |  |  |  |
|---------------------|--|--|--|--|
| <b>cULus Listed</b> |  |  |  |  |
|---------------------|--|--|--|--|

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|



# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## Accessories

### UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/us/products/0801453>



Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 30

---

### UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/us/products/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 24

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/us/products/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 56

---

## WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/us/products/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 3000

## SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable

1668072

<https://www.phoenixcontact.com/us/products/1668072>



## WP-CTA POM 13,0 BK - Protective hose adapter

1422884

<https://www.phoenixcontact.com/us/products/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

---

## WP-PA HF 13,0 BK - Protective hose

3240681

<https://www.phoenixcontact.com/us/products/3240681>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

## SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable

1668072

<https://www.phoenixcontact.com/us/products/1668072>



## WP-PA HF-HB 13,0 BK - Protective hose

3240839

<https://www.phoenixcontact.com/us/products/3240839>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

---

## PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/us/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



## SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable

1668072

<https://www.phoenixcontact.com/us/products/1668072>



### SAC-M12-EXCLIP-F - Locking clip

1558991

<https://www.phoenixcontact.com/us/products/1558991>



Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools

---

### B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/us/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

---

## WIREFOX SAC-1 - Stripping tool

1212757

<https://www.phoenixcontact.com/us/products/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/us/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

---

## WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/us/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade



# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

## TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

# SAC-3P- 1,5-PUR/M12FS B - Sensor/actuator cable



1668072

<https://www.phoenixcontact.com/us/products/1668072>

## TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

## SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)