

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995  
<https://www.phoenixcontact.com/us/products/1405995>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PVC, yellow, shielded, Plug straight M12, coding: A, on Socket angled M8, cable length: 1.5 m

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1405995                        |
| Packing unit                         | 1 pc                           |
| Minimum order quantity               | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BF13                           |
| Product key                          | BF1IDB                         |
| GTIN                                 | 4046356800341                  |
| Weight per piece (including packing) | 79.5 g                         |
| Weight per piece (excluding packing) | 75 g                           |
| Customs tariff number                | 85444290                       |
| Country of origin                    | US                             |

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## Technical data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Application          | Standard, U.S. cables |
| Number of positions  | 4                     |
| No. of cable outlets | 1                     |
| Shielded             | yes                   |
| Coding               | A                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Seal material                          | NBR                                         |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |
| Outer sheath, material                 | PVC                                         |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 48 V AC                    |
|                       | 60 V DC                    |
| Nominal current $I_N$ | 4 A                        |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | No |
| Status display present | No |

### Connection data

#### Conductor connection

|                   |                        |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|                   | 0.2 Nm (M8 connectors) |

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## Connector

### Connection 1

|                     |                   |
|---------------------|-------------------|
| Type                | Plug straight M12 |
| Number of positions | 4                 |
| Coding type         | A                 |


### Connection 2

|                     |                  |
|---------------------|------------------|
| Type                | Socket angled M8 |
| Number of positions | 4                |

## Cable/line

|              |       |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

### PVC yellow 105 °C [542]

|                                               |                                                                                     |
|-----------------------------------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing                           |  |
| Cable weight                                  | 37 kg/km                                                                            |
| UL AWM Style                                  | 2517 (105 °C / 300 V)                                                               |
| Number of positions                           | 4                                                                                   |
| Shielded                                      | yes                                                                                 |
| Cable type                                    | PVC yellow 105 °C [542]                                                             |
| Conductor structure signal line               | 32x 1.10 mm                                                                         |
| AWG signal line                               | 24                                                                                  |
| Wire diameter incl. insulation                | 1.12 mm ±0.03 mm                                                                    |
| External cable diameter                       | 4.90 mm ±0.2 mm                                                                     |
| Outer sheath, material                        | PVC                                                                                 |
| External sheath, color                        | yellow                                                                              |
| Conductor material                            | Tin-plated Cu litz wires                                                            |
| Material wire insulation                      | PVC                                                                                 |
| Single wire, color                            | brown, blue, black, white                                                           |
| Overall twist                                 | 4 wires, twisted                                                                    |
| Optical shield covering                       | 85 %                                                                                |
| Max. conductor resistance                     | max. 79.7 Ω/km (20 °C)                                                              |
| Insulation resistance                         | ≥ (550 M Ohms/m @ 500V)                                                             |
| Nominal voltage, cable                        | 300 V                                                                               |
| Minimum bending radius, flexible installation | 12 x D                                                                              |
| Smallest bending radius, movable installation | 59 mm                                                                               |

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Flame resistance                | FT4                                           |
| Other resistance                | UV resistant                                  |
| Ambient temperature (operation) | -30 °C ... 105 °C (cable, fixed installation) |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |
| Standard designation     | M8 connector    |
| Standards/specifications | IEC 61076-2-104 |


# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable

1405995

<https://www.phoenixcontact.com/us/products/1405995>

## Drawings

Schematic diagram

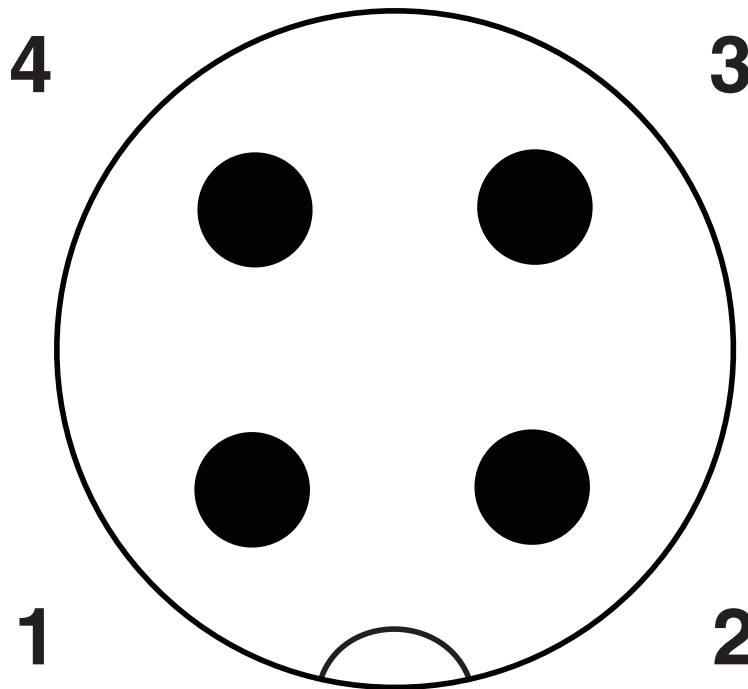


Pin assignment M12 plug, 4-pos., A-coded, view plug side

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable

1405995


<https://www.phoenixcontact.com/us/products/1405995>

Schematic diagram

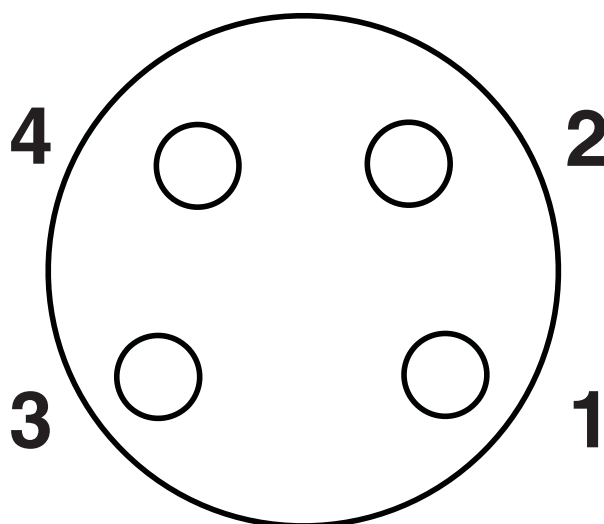

Pin assignment M8 socket, 4-pos., view female side

Schematic diagram

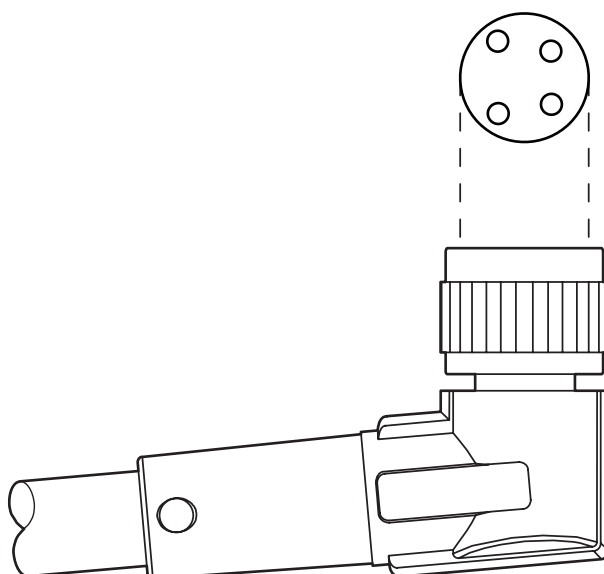


Layout of connector pin assignments

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable


1405995

<https://www.phoenixcontact.com/us/products/1405995>

Circuit diagram

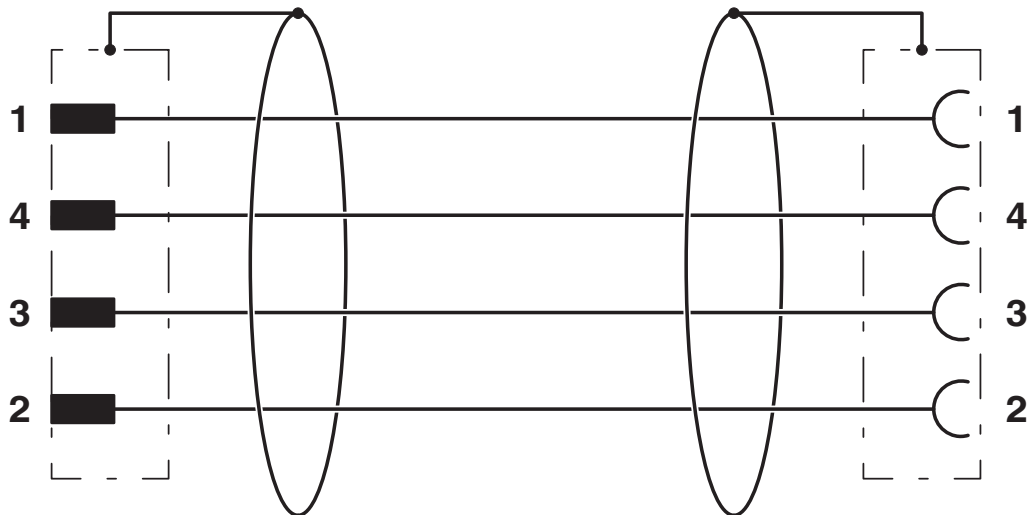

Dimensional drawing

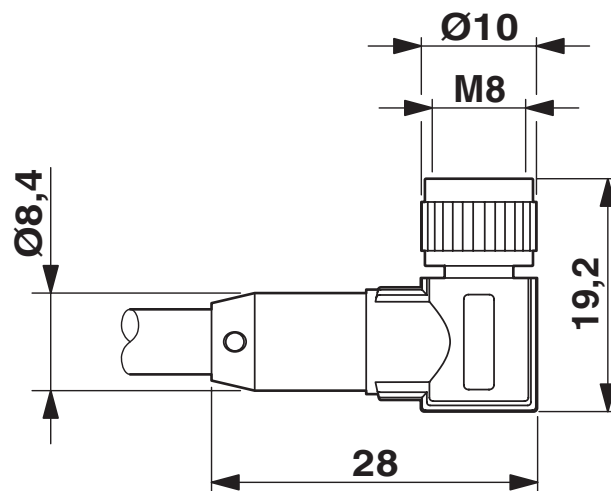


Socket M8 x 1, angled, shielded

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable

1405995

<https://www.phoenixcontact.com/us/products/1405995>

Dimensional drawing

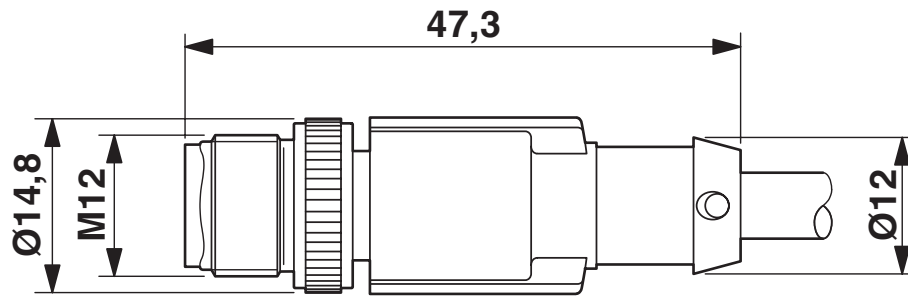

Plug, M12 x 1, straight, shielded

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995  
<https://www.phoenixcontact.com/us/products/1405995>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1405995>

|  |                                                |                                |                   |                               |
|--|------------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>UL Listed</b><br>Approval ID: FILE E 221474 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>                 | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 125 V                                          | 4 A                            | -                 | -                             |

|  |                                                 |                                |                   |                               |
|--|-------------------------------------------------|--------------------------------|-------------------|-------------------------------|
|  | <b>cUL Listed</b><br>Approval ID: FILE E 221474 |                                |                   |                               |
|  | Nominal voltage U <sub>N</sub>                  | Nominal current I <sub>N</sub> | Cross section AWG | Cross section mm <sup>2</sup> |
|  | 125 V                                           | 4 A                            | -                 | -                             |

|  |                                                      |  |  |  |
|--|------------------------------------------------------|--|--|--|
|  | <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |  |  |
|  |                                                      |  |  |  |

|                     |  |  |  |  |
|---------------------|--|--|--|--|
| <b>cULus Listed</b> |  |  |  |  |
|---------------------|--|--|--|--|

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995  
<https://www.phoenixcontact.com/us/products/1405995>

## Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 6(c)                                                                                                                                                                                                                              |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |
| SCIP                                    | 5bf60f28-f251-4211-8794-7b9095daf14e                                                                                                                                                                                              |

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## Accessories

### PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/us/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



---

### SAC-M12-EXCLIP-M - Locking clip

1558988

<https://www.phoenixcontact.com/us/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/us/products/0801453>



Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 30

---

## UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/us/products/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 24

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/us/products/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 56

---

## WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/us/products/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 3000

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## PROT-M 8 MS-PA-CHAIN - Screw plug

1430860

<https://www.phoenixcontact.com/us/products/1430860>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



---

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>

Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm



# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/us/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

---

## SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/us/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

## TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

# SAC-4P-MS/1,5-542/M8FRSH SCOBK - Sensor/actuator cable



1405995

<https://www.phoenixcontact.com/us/products/1405995>

## TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

## SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)