

1694910

https://www.phoenixcontact.com/us/products/1694910

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12, coding: A, with 2 LEDs, on Socket angled M8, with 2 LEDs, cable length: 3 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- · Convenient: increased machine availability thanks to quick and easy diagnostics

Commercial data

Item number	1694910
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF03
Product key	BF1CBA
Catalog page	Page 188 (C-2-2019)
GTIN	4017918180409
Weight per piece (including packing)	69 g
Weight per piece (excluding packing)	64 g
Customs tariff number	85444290
Country of origin	PL



1694910

https://www.phoenixcontact.com/us/products/1694910

Technical data

Product properties

Product type	Sensor/actuator cable
Application	Standard
Number of positions	3
No. of cable outlets	1
Shielded	no
Coding	A
Insulation characteristics	
Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	НВ
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	24 V DC
Nominal current I _N	4 A

Mechanical properties

Mec	hanical	data

Signaling

Status display	2 LEDs
Status display present	Yes

Connection data

Conductor connection

Tightening torque	0.4 Nm (M12 connector)
	0.2 Nm (M8 connectors)

Connector

Connection 1



1694910

https://www.phoenixcontact.com/us/products/1694910

Туре	Plug straight M12
Number of positions	3
Coding type	A
Connection 2	
Connection 2 Type	Socket angled M8

Cable/line

Cable length	3 m

PUR halogen-free black [PUR]

Dimensional drawing



Cable weight	18 kg/km
UL AWM Style	20549 / 10493 (80°C/300 V)
Number of positions	3
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	32x 0.10 mm
AWG signal line	24
Conductor cross section	3x 0.25 mm² (Signal line)
Wire diameter incl. insulation	1.17 mm ±0.02 mm
External cable diameter	3.60 mm ±0.15 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	brown, blue, black
Thickness, insulation	≥ 0.21 mm (Core insulation)
Thickness, outer sheath	approx. 0.50 mm
Overall twist	3 wires, twisted
Length of twist, overall twist	40 mm
Max. conductor resistance	≤ 78 Ω/km (at 20 °C)
Insulation resistance	≥ 100 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 3000 V
Smallest bending radius, fixed installation	18 mm
Smallest bending radius, movable installation	36 mm



1694910

https://www.phoenixcontact.com/us/products/1694910

Max. bending cycles	10000000
Bending radius	44 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s²
Halogen-free	in accordance with DIN VDE 0472 part 815
Flame resistance	in accordance with UL 758/1581 FT2
	DIN EN 60332-2-2 (20 s)
Resistance to oil	in accordance with DIN EN 60811-2-1
Other resistance	hydrolysis and microbe resistant
	Highly resistant to acids, alkaline solutions and solvents
	Resistant to salt water
	partly UV-resistant (in accordance with DIN EN ISO 4892-2-A)
Special properties	Flexible cable conduit capable
	Silicone-free
	Free of substances which would hinder coating with paint or varnish
Ambient temperature (operation)	-40 °C 80 °C (cable, fixed installation)
	-25 °C 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP68
Ambient temperature (operation)	-25 °C 90 °C (Plug / socket)
	-40 °C 80 °C (cable, fixed installation)
	-5 °C 80 °C (Cable, flexible installation)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101
Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104




1694910

https://www.phoenixcontact.com/us/products/1694910


Drawings

Dimensional drawing



Socket M8 x 1, angled, with LED

Schematic diagram

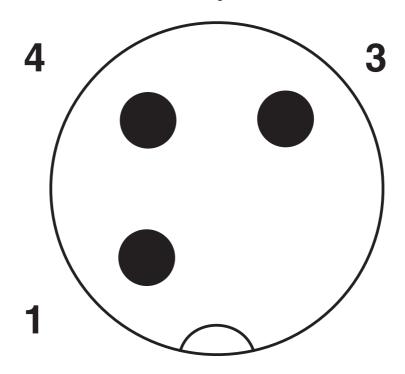


Pin assignment M12 plug, 3-pos., A-coded, view male side



1694910


https://www.phoenixcontact.com/us/products/1694910

Schematic diagram

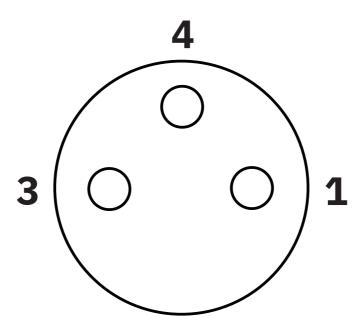

Pin assignment M8 socket, 3-pos., view female side

Circuit diagram

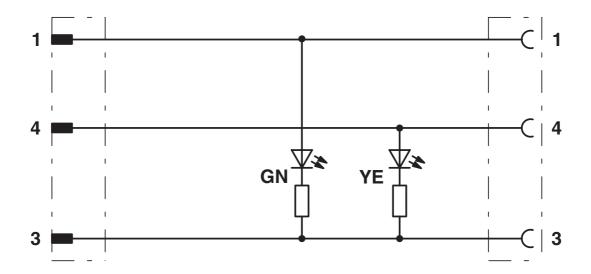




1694910


https://www.phoenixcontact.com/us/products/1694910

Dimensional drawing

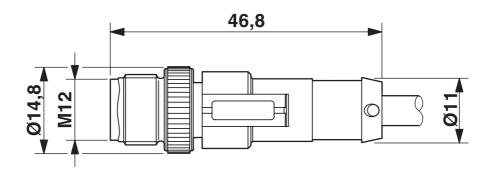

Plug, M12 x 1, straight, shielded

Schematic diagram



Layout of connector pin assignments



1694910

https://www.phoenixcontact.com/us/products/1694910

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1694910

<u> </u>	UL Listed Approval ID: FILE E 221474				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		24 V	4 A	-	-

• <u>®</u>	cUL Listed Approval ID: FILE E 221474	4			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		24 V	4 A	-	-

EHC	EAC-RoHS
	Approval ID: RU D-DE.HB35.B.00387

cULus Listed



1694910

https://www.phoenixcontact.com/us/products/1694910

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27060311	
ECLASS-12.0	27060311	
ECLASS-13.0	27060311	
ETIM		
ETIM 9.0	EC001855	
UNSPSC		

26121600



1694910

https://www.phoenixcontact.com/us/products/1694910

Environmental product compliance

EU RoHS				
Fulfills EU RoHS substance requirements	Yes, No exemptions			
China RoHS				
Environment friendly use period (EFUP)	EFUP-E			
	No hazardous substances above the limits			
EU REACH SVHC				
REACH candidate substance (CAS No.)	No substance above 0.1 wt%			



1694910

https://www.phoenixcontact.com/us/products/1694910

Accessories

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

https://www.phoenixcontact.com/us/products/1430873

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



SAC-M12-EXCLIP-M - Locking clip

1558988

https://www.phoenixcontact.com/us/products/1558988



Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



1694910

https://www.phoenixcontact.com/us/products/1694910

UCT-WMT (23X4) - Conductor marker

0801453

https://www.phoenixcontact.com/us/products/0801453



Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 30

UC-WMT (23X4) - Conductor marker

0819411

https://www.phoenixcontact.com/us/products/0819411



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 24



1694910

https://www.phoenixcontact.com/us/products/1694910

US-WMT (23X4) - Cable marker

0828769

https://www.phoenixcontact.com/us/products/0828769



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 56

WMTW (23X4)R - Cable marker

0831004

https://www.phoenixcontact.com/us/products/0831004



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 3000



1694910

https://www.phoenixcontact.com/us/products/1694910

PROT-M 8 MS-PA-CHAIN - Screw plug

1430860

https://www.phoenixcontact.com/us/products/1430860

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



B-STIFT - Marker pen

1051993

https://www.phoenixcontact.com/us/products/1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm



1694910

https://www.phoenixcontact.com/us/products/1694910

TSD 02 SAC - Torque screwdriver

1208487

https://www.phoenixcontact.com/us/products/1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SAC BIT M8-D10 - Tool

1208461

https://www.phoenixcontact.com/us/products/1208461



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive



1694910

https://www.phoenixcontact.com/us/products/1694910

TSD 04 SAC - Torque screwdriver

1208429

https://www.phoenixcontact.com/us/products/1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

TSD-M 1,2NM - Torque screwdriver

1212224

https://www.phoenixcontact.com/us/products/1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0. 3 - 1.2 Nm



1694910

https://www.phoenixcontact.com/us/products/1694910

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

https://www.phoenixcontact.com/us/products/1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC BIT M12-D15 - Tool

1208432

https://www.phoenixcontact.com/us/products/1208432



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com