
RT 5 BU - Bolt connection terminal block

3049123

https://www.phoenixcontact.com/us/products/3049123

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block with bolt connection technology, cross section: 0.1 … 6 mm^2, AWG: 26 … 10, width 16.3 mm, color: blue

Your advantages

- The special clamping nuts can be actuated with a normal screwdriver
- Large-surface labeling options in the terminal center and above the terminal points
- Easy bridging and potential distribution using the patented plug-in bridges from the CLIPLINE complete system
- Quick and easy connection with fold-up hinged covers which hold the clamping nuts captive. With the covers folded open, the bolt is free to accept the cable lugs
- After closing and engaging the covers, the clamping nut automatically aligns with the threaded bolt and can be tightened easily.
- The screws are secured against loosening by captive spring-loaded spacers
- The hinged cover cover the live metal parts including the insulated cable lugs in the clamping area so that they are touch proof
- The use of the switching lock effectively prevents unintentional switching
- Testing with the standardized test adapters and test plugs of the CLIPLINE complete system
- Tested for railway applications

Commercial data

Item number	3049123
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE43
Product key	BE4313
Catalog page	Page 381 (C-1-2019)
GTIN	4046356140805
Weight per piece (including packing)	39.98 g
Weight per piece (excluding packing)	37.18 g
Customs tariff number	85369010
Country of origin	CN

Technical data

Notes

General	Note: the BE-RT... path extension is to be used for non-insulated cable lugs (see accessories).

General

Note	The rated insulation voltage applies to insulated cable lugs acc. to DIN 46237:1970-07 and for uninsulated cable lugs acc. to DIN 46234:1980-03 with path extension.

Product properties

Product type	Bolt connection terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
	Process industry
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

Connection data

Number of connections per level	2
Nominal cross section	6 mm²

Level 1 above 1 below 1

Stripping length	The stripping length depends on the specification provided by the cable lug manufacturer.
Connection in acc. with standard	IEC 60947-7-1
Nominal current	41 A
Maximum load current	41 A (with 6 mm² conductor cross section)
Nominal voltage	1000 V (Rated voltage for open disconnect point 500 V)
Nominal cross section	6 mm²

Cable lug connection DIN 46234:1980-03

Connection in acc. with standard	DIN 46234:1980-03
Cross section	0.5 mm² ... 6 mm²
Cross section range AWG	20 ... 10 (converted acc. to IEC)
Hole diameter	5.3 mm

Width	10 mm
Bolt diameter	5 mm
Screw thread	M5
Tightening torque	2.5 ... 3 Nm
Connection in acc. with standard	DIN 46237:1970-07
Cross section	1 mm² ... 6 mm²
Cross section range AWG	18 ... 10 (converted acc. to IEC)
Hole diameter	5.3 mm
Width	10 mm
Bolt diameter	5 mm
Screw thread	M5
Tightening torque	2.5 ... 3 Nm
Identification color of ring cable lugs : red	1 mm²
Identification color of ring cable lugs : blue	2.5 mm²
Identification color of ring cable lugs : yellow	6 mm²
Connection in acc. with standard	DIN 46235:1983-07
Cross section	6 mm² ... 10 mm²
Cross section range AWG	10 ... 8 (converted acc. to IEC)
Hole diameter	5.3 mm
Width	9 mm
Bolt diameter	5 mm
Screw thread	M5
Tightening torque	2.5 ... 3 Nm

Ex data

Rated data (ATEX/IECEx)

Identification	Ⓔx II 2 G Ex eb IIC Gb
Operating temperature range	-60 °C ... 110 °C
Ex-certified accessories	3049097 D-RT 3/5
	0706647 TPNS-UK
	3049819 BE-RT 3/5
	1205079 SZS 1,0X6,5 VDE
	1212553 SF-SL 1,2X6,5-150
	3022276 CLIPFIX 35-5
List of bridges	Plug-in bridge / FBS 2-8 / 3030284
	Plug-in bridge / FBS 3-8 / 3030297
	Plug-in bridge / FBS 4-8 / 3030307
	Plug-in bridge / FBS 5-8 / 3030310
	Plug-in bridge / FBS 6-8 / 3032470
	Plug-in bridge / FBS 10-8 / 3030323
Bridge data	41 A / 6 mm²
Ex temperature increase	40 K (41 A at 6 mm²)
Rated voltage	550 V

for bridging with bridge	550 V
- At bridging between non-adjacent terminal blocks	220 V
- At cut-to-length bridging with cover	220 V
- At cut-to-length bridging with partition plate	550 V
Rated insulation voltage	500 V
output	(Permanent)

Ex level General

Rated current	41 A
Maximum load current	41 A
Contact resistance	0.41 mΩ

Ex connection data General

Torque range	2.5 Nm ... 3 Nm
Nominal cross section	6 mm²
Rated cross section AWG	10
Connection capacity rigid	0.1 mm² ... 6 mm²
Connection capacity AWG	26 ... 10
Connection capacity flexible	0.1 mm² ... 6 mm²
Connection capacity AWG	26 ... 10

Dimensions

Width	16.3 mm
End cover width	2.2 mm
Height	66 mm
Depth	50.4 mm
Depth on NS 35/7,5	51 mm
Depth on NS 35/15	58.5 mm

Material specifications

Color	blue
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed

Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 6 mm²	0.72 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	2.2 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes

Mechanical tests

Mechanical strength

Result	Test passed

Attachment on the carrier

DIN rail/fixing support	NS 35
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 1, class B, body mounted
Frequency	f_1 = 5 Hz to f_2 = 150 Hz
ASD level	1.857 (m/s²)²/Hz
Acceleration	0.8g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-1

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Drawings

Circuit diagram

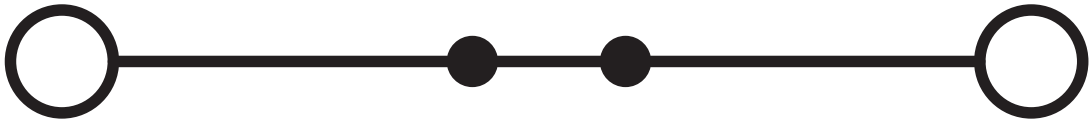

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3049123

IECEE CB Scheme
Approval ID: DE1-62814

EAC
Approval ID: RU C-DE.BL08.B.00540

VDE Zeichengenehmigung
Approval ID: 40022553

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	1000 V	41 A	-	0.14 - 6

cULus Recognized
Approval ID: E60425

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	600 V	30 A	-	-
Use group C				
	600 V	30 A	-	-

IECEx
Approval ID: IECExPTB08.0063U

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	550 V	41 A	-	0.1 - 6

ATEX
Approval ID: PTB09ATEX1003U

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	550 V	41 A	-	0.1 - 6

CCC
Approval ID: 2020322313000627

UKCA-EX
Approval ID: CSAE 22UKEX1085U

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897

UNSPSC

UNSPSC 21.0	39121400

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Accessories

Note: Applying some accessories below might limit this product.

FBS 2-8 - Plug-in bridge

3030284

https://www.phoenixcontact.com/us/products/3030284



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: red

Max. current carrying capacity: 41 A

FBS 3-8 - Plug-in bridge

3030297

https://www.phoenixcontact.com/us/products/3030297



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: red

Max. current carrying capacity: 41 A

FBS 4-8 - Plug-in bridge

3030307

https://www.phoenixcontact.com/us/products/3030307



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: red

Max. current carrying capacity: 41 A

FBS 5-8 - Plug-in bridge

3030310

https://www.phoenixcontact.com/us/products/3030310



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: red

Max. current carrying capacity: 41 A

FBSRH 2-8 - Short-circuit connector

3033802

https://www.phoenixcontact.com/us/products/3033802



Short-circuit connector, pitch: 8.2 mm, number of positions: 2, color: red

Max. current carrying capacity: 32 A

FBSRH 3-8 - Short-circuit connector

3033803

https://www.phoenixcontact.com/us/products/3033803



Short-circuit connector, pitch: 8.2 mm, number of positions: 3, color: red

Max. current carrying capacity: 32 A

FBSRH 4-8 - Short-circuit connector

3033804

https://www.phoenixcontact.com/us/products/3033804



Short-circuit connector, pitch: 8.2 mm, number of positions: 4, color: red

Max. current carrying capacity: 32 A

FBS 2-8 CT - Plug-in bridge

3033830

https://www.phoenixcontact.com/us/products/3033830



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: orange

Max. current carrying capacity: 41 A

FBS 3-8 CT - Plug-in bridge

3033831

https://www.phoenixcontact.com/us/products/3033831



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: orange

Max. current carrying capacity: 41 A

FBS 4-8 CT - Plug-in bridge

3033832

https://www.phoenixcontact.com/us/products/3033832



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: orange

Max. current carrying capacity: 41 A

FBS 10-8 CT - Plug-in bridge

3033833

https://www.phoenixcontact.com/us/products/3033833



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: orange

Max. current carrying capacity: 41 A

FBS 2-8 BU - Plug-in bridge

3032567

https://www.phoenixcontact.com/us/products/3032567



Plug-in bridge, pitch: 8.2 mm, number of positions: 2, color: blue

Max. current carrying capacity: 41 A

FBS 3-8 BU - Plug-in bridge

3032570

https://www.phoenixcontact.com/us/products/3032570



Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: blue

Max. current carrying capacity: 41 A

FBS 4-8 BU - Plug-in bridge

3032583

https://www.phoenixcontact.com/us/products/3032583



Plug-in bridge, pitch: 8.2 mm, number of positions: 4, color: blue

Max. current carrying capacity: 41 A

FBS 5-8 BU - Plug-in bridge

3032596

https://www.phoenixcontact.com/us/products/3032596



Plug-in bridge, pitch: 8.2 mm, number of positions: 5, color: blue

Max. current carrying capacity: 41 A

FBS 6-8 BU - Plug-in bridge

3032677

https://www.phoenixcontact.com/us/products/3032677



Plug-in bridge, pitch: 8.2 mm, number of positions: 6, color: blue

Max. current carrying capacity: 41 A

RT 5 BU - Bolt connection terminal block

3049123

https://www.phoenixcontact.com/us/products/3049123

FBS 10-8 BU - Plug-in bridge

3032606

https://www.phoenixcontact.com/us/products/3032606



Plug-in bridge, pitch: 8.2 mm, number of positions: 10, color: blue

Max. current carrying capacity: 41 A

RB UT 6-ST(2,5/4) - Reducing bridge

3047264

https://www.phoenixcontact.com/us/products/3047264



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 33 mm, color: red

Max. current carrying capacity: 35 A

RB UT 6-(2,5/4) - Reducing bridge

3047251

https://www.phoenixcontact.com/us/products/3047251



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red

Max. current carrying capacity: 40 A

D-RT 3/5 - End cover

3049097

https://www.phoenixcontact.com/us/products/3049097



End cover, depth: 42.2 mm, width: 2.2 mm, height: 65 mm, color: gray

TPNS-UK - Partition plate

0706647

https://www.phoenixcontact.com/us/products/0706647



Partition plate, depth: 70 mm, width: 2 mm, height: 80 mm, color: gray

BE-RT 3/5 - Path extension

3049819

https://www.phoenixcontact.com/us/products/3049819



Path extension, color: gray

LPS-8/E - Service connector

3270560

https://www.phoenixcontact.com/us/products/3270560



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm^2, cross section: 0.14 mm^2 - 4 mm^2, color: red

LPS-8 - Service connector

3270561

https://www.phoenixcontact.com/us/products/3270561



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm^2, cross section: 0.14 mm^2 - 4 mm^2, color: red

LPO 6/E - Pick-off plug

3270525

https://www.phoenixcontact.com/us/products/3270525



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm^2, cross section: 0.14 mm^2- 4 mm^2, color: gray

LPO 6 - Pick-off plug

3270526

https://www.phoenixcontact.com/us/products/3270526



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm^2, cross section: 0.14 mm^2- 4 mm^2, color: gray

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/us/products/1201730



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/us/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/us/products/0806602



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/us/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/us/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/us/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/us/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/us/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/us/products/1206573

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/us/products/1201798




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZB 12:UNPRINTED - Zack marker strip

0812120

https://www.phoenixcontact.com/us/products/0812120



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 12 x 10.5 mm, Number of individual labels: 5

ZB 12 CUS - Zack marker strip

0824942

https://www.phoenixcontact.com/us/products/0824942



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

ZB 12,LGS:L1-N,PE - Zack marker strip

0812146

https://www.phoenixcontact.com/us/products/0812146



Zack marker strip, Strip, white, labeled, printed horizontally: L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

UC-TM 12 - Marker for terminal blocks

0819194

https://www.phoenixcontact.com/us/products/0819194



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40

UC-TM 12 CUS - Marker for terminal blocks

0824613

https://www.phoenixcontact.com/us/products/0824613



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40

UCT-TM 12 - Marker for terminal blocks

0829144

https://www.phoenixcontact.com/us/products/0829144



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30

UCT-TM 12 CUS - Marker for terminal blocks

0829630

https://www.phoenixcontact.com/us/products/0829630



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30

ZB 16,3:UNPRINTED - Zack marker strip

0820222

https://www.phoenixcontact.com/us/products/0820222



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 16.3 mm, lettering field size: 10.5 x 16.25 mm, Number of individual labels: 5

ZB 16,3 CUS - Zack marker strip

0824946

https://www.phoenixcontact.com/us/products/0824946



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 16.3 mm, lettering field size: 10.5 x 16.25 mm, Number of individual labels: 5

MPS-MT - Test plug

0201744

https://www.phoenixcontact.com/us/products/0201744



Test plug, with solder connection up to 1 mm^2 conductor cross section, number of positions: 1, color: gray

MPS-IH WH - Insulating sleeve

0201663

https://www.phoenixcontact.com/us/products/0201663

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

https://www.phoenixcontact.com/us/products/0201676

Insulating sleeve, color: red




MPS-IH BU - Insulating sleeve

0201689

https://www.phoenixcontact.com/us/products/0201689

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

https://www.phoenixcontact.com/us/products/0201692

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

https://www.phoenixcontact.com/us/products/0201702

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

https://www.phoenixcontact.com/us/products/0201728

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

https://www.phoenixcontact.com/us/products/0201731

Insulating sleeve, color: black



PAI-4-N GY - Test adapter

3032871

https://www.phoenixcontact.com/us/products/3032871



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

PS-8 - Test plug

3031005

https://www.phoenixcontact.com/us/products/3031005



Test plug, Modular test plug, number of positions: 1, color: red

DP PS-8 - Spacer plate

3036741

https://www.phoenixcontact.com/us/products/3036741



Spacer plate, depth: 29 mm, width: 8.2 mm, height: 22.4 mm, number of positions: 1, color: red

PS-8/2,3MM RD - Test plug

3048564

https://www.phoenixcontact.com/us/products/3048564



Test plug, number of positions: 1, color: red

CLIPFIX 35 - End bracket

3022218

https://www.phoenixcontact.com/us/products/3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

https://www.phoenixcontact.com/us/products/3022276




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5. 15 mm, color: gray

E/NS 35 N - End bracket

0800886

https://www.phoenixcontact.com/us/products/0800886



End clamp, width: 9.5 mm, color: gray

E/UK - End bracket

1201442

https://www.phoenixcontact.com/us/products/1201442



End bracket, Mounting on a DIN rail NS 32 or NS 35, material: PA, color: gray

E/UK 1 - End bracket

1201413

https://www.phoenixcontact.com/us/products/1201413



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

SZS 1,0X6,5 VDE - Screwdriver

1205079

https://www.phoenixcontact.com/us/products/1205079



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 6.5 x 150 mm, 2-component grip, with non-slip grip

SF-SL 1,2X6,5-150 - Screwdriver

1212553

https://www.phoenixcontact.com/us/products/1212553



Screwdriver, bladed (lasered), size: 1.2 x 6.5 x 150 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com