

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel feed-through, product family: QPD, connection method: Spade connection (For slip-on sleeves according to DIN 46247-2), number of positions: 4+PE, M25, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, without QUICKON nut, coding: Coding profile, 1.5 mm<sup>2</sup>

## Your advantages

- Innovative and time saving - QUICKON fast connection for time saving of up to 80 % for on-site connection
- Robust throughout: housing with IP68/IP69K and IK07 protection for a wide range of applications
- Safer connection with mechanical coding to protect against mismatching, and touch-proof protection in accordance with DIN EN 0105
- Efficient - by using panel feed-throughs, devices no longer need to be opened in order to connect cables

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1414738             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | BF50                |
| Product key                          | BF6ACA              |
| Catalog page                         | Page 478 (C-2-2019) |
| GTIN                                 | 4055626033532       |
| Weight per piece (including packing) | 26.7 g              |
| Weight per piece (excluding packing) | 25.01 g             |
| Customs tariff number                | 85366990            |
| Country of origin                    | PL                  |

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

## Technical data

### Product properties

|                                    |                    |
|------------------------------------|--------------------|
| Product type                       | Panel feed-through |
| Product family                     | QPD                |
| Type                               | QPD 5x1,5          |
| Number of positions                | 5                  |
| Connection profile                 | 4+PE               |
| Position marking                   | 1, 2, 3, N, PE     |
| Number of connections              | 10                 |
| Number of connections per position | 1                  |
| Coding                             | Coding profile     |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Connection data


#### Connection technology

|                                                                       |                                                                 |
|-----------------------------------------------------------------------|-----------------------------------------------------------------|
| Connection method On the device side                                  | Spade connection (For slip-on sleeves according to DIN 46247-2) |
| Frequency of connections between conductors of the same cross section | max. 10                                                         |

#### Conductor connection

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Conductor cross section flexibel | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Conductor cross section solid    | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Connection cross section AWG     | 20 ... 16                                   |
| Tightening torque Union nut      | 8 Nm                                        |
| Tightening torque Locking nut    | 5 Nm                                        |

### Dimensions

|                                  |                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing              |  |
| Width                            | 30 mm                                                                                |
| Height                           | 30 mm                                                                                |
| Length                           | 47.9 mm                                                                              |
| Diameter                         | 30 mm                                                                                |
| Dimensions of slip-on connection | 4.8 x 0.8 mm                                                                         |

### Electrical properties

|                            |      |
|----------------------------|------|
| Rated surge voltage (II/2) | 8 kV |
|----------------------------|------|

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

|                             |          |
|-----------------------------|----------|
| Rated surge voltage (III/2) | 8 kV     |
| Rated surge voltage (III/3) | 6 kV     |
| Rated current               | 17.5 A   |
| Contact resistance          | < 3 mΩ   |
| rated voltage (II/2)        | 1000 V   |
| rated voltage (III/2)       | 1000 V   |
| Rated voltage (III/3)       | 690 V    |
| Nominal voltage $U_N$       | 690 V AC |
|                             | 690 V DC |
| Nominal current $I_N$       | 17.5 A   |

## Mechanical properties

### Mechanical data

|                             |         |
|-----------------------------|---------|
| Insertion/withdrawal cycles | max. 50 |
|-----------------------------|---------|

## Material specifications

|                                        |                   |
|----------------------------------------|-------------------|
| Color                                  | black (RAL 9005)  |
| Material Housing                       | PA                |
| Material Contact                       | Cu                |
| Material Contact surface               | Silver-plated     |
| Flammability rating according to UL 94 | V0                |
| Material wire insulation               | PVC/PE/TPE/rubber |

## Cable/line

|                                                                             |                                    |
|-----------------------------------------------------------------------------|------------------------------------|
| Structure of individual litz in acc. with VDE 0295 / smallest wire diameter | VDE 0295 class 1 to 6/min. 0.15 mm |
| Wire diameter including insulation                                          | 1.6 mm ... 3 mm                    |
| Position marking                                                            | 1, 2, 3, N, PE                     |
| Cable cross section                                                         | 1.5 mm <sup>2</sup>                |
| Material wire insulation                                                    | PVC/PE/TPE/rubber                  |

## Mounting

|               |                    |
|---------------|--------------------|
| Mounting type | Front mounting M25 |
|---------------|--------------------|

## Environmental and real-life conditions

### Ambient conditions

|                                         |                   |
|-----------------------------------------|-------------------|
| Degree of protection                    | IP66              |
|                                         | IP68 (2 m / 24 h) |
|                                         | IP69K             |
| Ambient temperature (operation)         | -40 °C ... 100 °C |
| Temperature when conductor connected    | -5 °C ... 50 °C   |
| Ambient temperature (storage/transport) | -40 °C ... 100 °C |

# QPD W 4PE1,5 M25 FC BK - Panel feed-through


1414738

<https://www.phoenixcontact.com/us/products/1414738>




## Drawings


Dimensional drawing

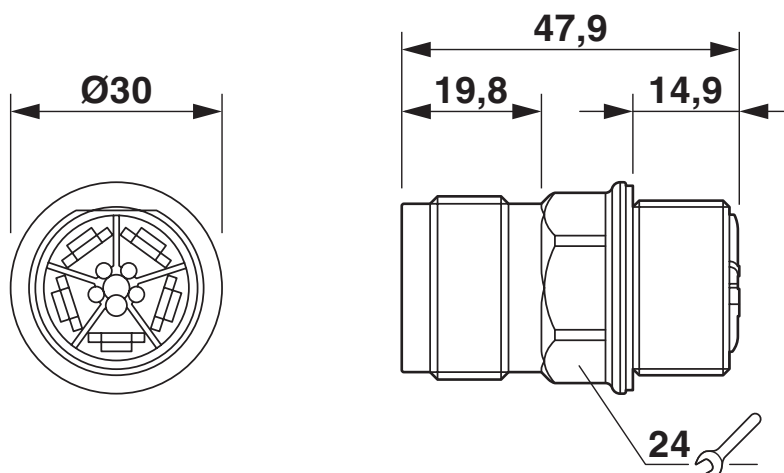

Dimensional drawing

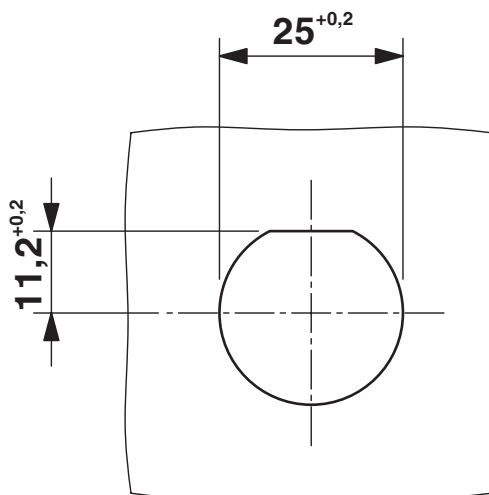

Panel cutout

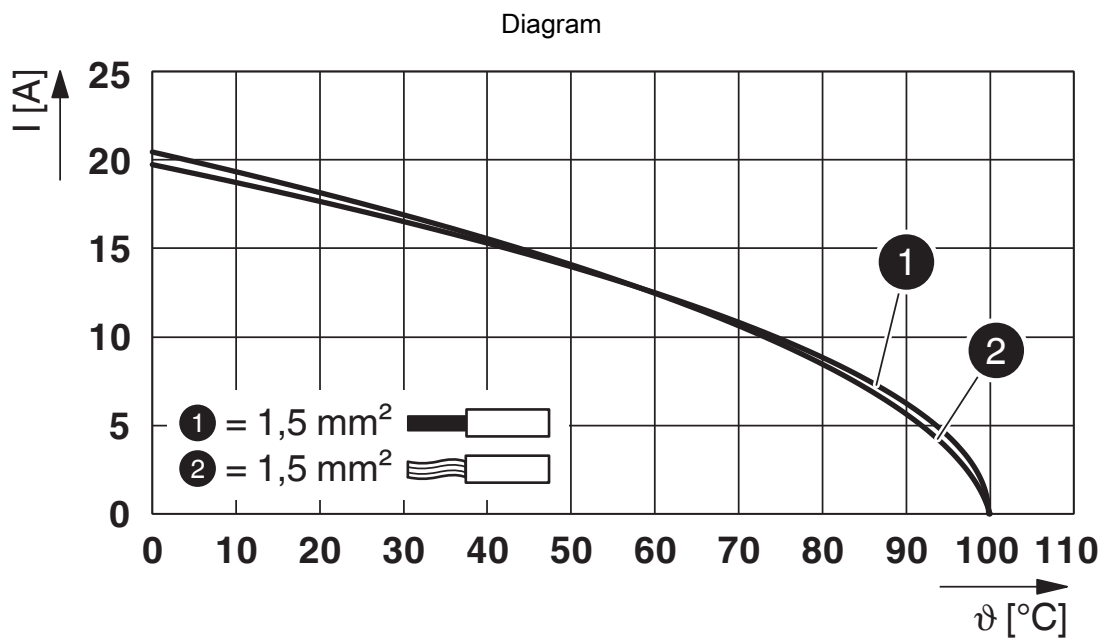

Derating diagram

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1414738>



**IECEE CB Scheme**  
Approval ID: DE1-65875



**EAC**  
Approval ID: RU C-DE.BL08.B.00511



**DNV GL**  
Approval ID: TAE00003J5



**VDE Zeichengenehmigung**  
Approval ID: 40029149

|                                                                                     |                                          |                       |                   |                             |
|-------------------------------------------------------------------------------------|------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>UL Listed</b><br>Approval ID: E468743 |                       |                   |                             |
|                                                                                     | Nominal voltage $U_N$                    | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                     | 600 V                                    | 8 A                   | -                 | - 16                        |

|                                                                                     |                                           |                       |                   |                             |
|-------------------------------------------------------------------------------------|-------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>cUL Listed</b><br>Approval ID: E468743 |                       |                   |                             |
|                                                                                     | Nominal voltage $U_N$                     | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                     | 600 V                                     | 8 A                   | - 16              | -                           |

**cULus Listed**

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440602 |
| ECLASS-12.0 | 27440602 |
| ECLASS-13.0 | 27440602 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002566 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121500 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

## Mandatory accessories

### QPD P 4PE1,5 5-10 BK - Connector

1414749

<https://www.phoenixcontact.com/us/products/1414749>



Connector, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 6 mm ... 10 mm

---

### QPD P 4PE1,5 9-14 BK - Connector

1414750

<https://www.phoenixcontact.com/us/products/1414750>



Connector, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

## QPD N 4PE1,5 5-10 BK - Nut

1415101

<https://www.phoenixcontact.com/us/products/1415101>



Nut, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, external cable diameter: 6 mm ... 10 mm

---

## QPD N 4PE1,5 9-14 BK - Nut

1415104

<https://www.phoenixcontact.com/us/products/1415104>



Nut, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, external cable diameter: 10 mm ... 14 mm

---

## Accessories

## QPD W 4PE1,5 M25 FC BK - Panel feed-through

1414738

<https://www.phoenixcontact.com/us/products/1414738>



## QPD QSK 5X1,5 - Protective cap

1414758

<https://www.phoenixcontact.com/us/products/1414758>

Protective cap plastic, for QPD-QUICKON connection 5x 1.5 mm<sup>2</sup>, IP50



---

## CP-QPD 5X1,5 - Coding profile

1414760

<https://www.phoenixcontact.com/us/products/1414760>

Coding profile red, for pushing into the QUICKON dome and connector, can be positioned in 90° steps.



## QPD W 4PE1,5 M25 FC BK - Panel feed-through

1414738

<https://www.phoenixcontact.com/us/products/1414738>



### QPD QSK BK 5X1,5 FS - Protective cap

1414728

<https://www.phoenixcontact.com/us/products/1414728>

Protective cap, plastic, for QUICKON connection, black, with retaining cord, IP68



---

### Q-MU M25 - Nut

1640715

<https://www.phoenixcontact.com/us/products/1640715>

Nut (plastic) to lock the contact carrier from the inside of the device



## QPD W 4PE1,5 M25 FC BK - Panel feed-through

1414738

<https://www.phoenixcontact.com/us/products/1414738>



### QPD W 4PE1,5 M25 0,5 BK - Panel feed-through

1414736

<https://www.phoenixcontact.com/us/products/1414736>



Panel feed-through, product family: QPD, connection method: Single wires (Welded-on), number of positions: 4+PE, M25, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, without QUICKON nut, coding: Coding profile, 1.5 mm<sup>2</sup>, wires cut flat at the end, cable length: 0.5 m

---

### QPD W 4PE1,5 M25 1,0 BK - Panel feed-through

1414737

<https://www.phoenixcontact.com/us/products/1414737>



Panel feed-through, product family: QPD, connection method: Single wires, number of positions: 4+PE, M25, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, without QUICKON nut, coding: Coding profile, 1.5 mm<sup>2</sup>, cable length: 1 m

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

## QPD H 4PE1,5 BK - H distributor

1414757

<https://www.phoenixcontact.com/us/products/1414757>



H distributor, product family: QPD, connection method: IDC connection/  
QUICKON fast connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690  
V, 17.5 A, PA, black, without QUICKON nut, coding: Coding profile

---

## QPD C 4PE1,5 1X5-10 BK - Conductor connector

1414739

<https://www.phoenixcontact.com/us/products/1414739>



Conductor connector, product family: QPD, connection method: IDC connection,  
number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with  
one QUICKON nut, coding: Coding profile, external cable diameter: 6 mm ... 10  
mm

# QPD W 4PE1,5 M25 FC BK - Panel feed-through



1414738

<https://www.phoenixcontact.com/us/products/1414738>

## QPD C 4PE1,5 1X9-14 BK - Conductor connector

1414741

<https://www.phoenixcontact.com/us/products/1414741>



Conductor connector, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, with one QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

---

## QPD T 4PE1,5 2X5-10 BK - T distributor

1414751

<https://www.phoenixcontact.com/us/products/1414751>



T distributor, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, With two QUICKON nuts, coding: Coding profile, external cable diameter: 6 mm ... 10 mm

# QPD W 4PE1,5 M25 FC BK - Panel feed-through

1414738

<https://www.phoenixcontact.com/us/products/1414738>



## QPD T 4PE1,5 2X9-14 BK - T distributor

1414752

<https://www.phoenixcontact.com/us/products/1414752>



T distributor, product family: QPD, connection method: IDC connection, number of positions: 4+PE, 0.5 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, 690 V, 17.5 A, PA, black, With two QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 14 mm

---

## QSS 22 - Socket wrench

1670206

<https://www.phoenixcontact.com/us/products/1670206>



Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)