

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, Plug straight M8, coding: A, on free cable end, cable length: 5 m, Connector unshielded

Commercial data

Item number	1575725
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF02
Product key	BF1BDD
Catalog page	Page 432 (C-2-2019)
GTIN	4046356423830
Weight per piece (including packing)	295 g
Weight per piece (excluding packing)	303.9 g
Customs tariff number	85444290
Country of origin	PL

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Technical data

Notes

General	Further products with variable cable lengths can be found in the accessories section
---------	--

Product properties

Product type	Data cable preassembled
Application	Standard
Sensor type	CANopen®
Number of positions	5
No. of cable outlets	1
Shielded	yes
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Interfaces

Bus system	CANopen®/DeviceNet™
Signal type/category	CANopen® DeviceNet™

Signaling

Status display	No
----------------	----

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	30 V AC 30 V DC
Nominal current I _N	4 A
Transmission medium	Copper

Material specifications

Flammability rating according to UL 94	HB
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Connection data

Pin assignment

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Contact Color (signal designation) Contact (optional)	1 (Plug) SR (shield)
	2 (Plug) RD (V+)
	4 (Plug) BK (V-)
	3 (Plug) WH (CAN_H)
	5 (Plug) BU (CAN_L)

Connector

Connection 1

Type	Plug straight M8
Number of positions	5
Coding type	A (Standard)


Connection 2

Type	free cable end free cable end
------	-------------------------------

Cable/line

Cable length	5 m
--------------	-----

CANopen®/DeviceNet™, PUR, violet [920]

Dimensional drawing	
Cable weight	90 kg/km
UL AWM Style	21198 (80°C/300 V)
Number of positions	4
Shielded	yes
Cable type	CANopen®/DeviceNet™, PUR, violet [920]
Conductor structure	2xAWG24/19+2xAWG22/19
Conductor structure signal line	19x 0.13 mm
AWG signal line	24
Conductor cross section	2x 0.25 mm ² (Data cable) 2x 0.34 mm ² (Power supply) 1x 0.34 mm ² (Drain wire)
Wire diameter incl. insulation	1.95 mm ±0.05 mm (Data cable) 1.4 mm ±0.05 mm (Power supply)
External cable diameter	6.70 mm ±0.3 mm
Outer sheath, material	PUR
External sheath, color	red lilac RAL 4001
Conductor material	Tin-plated Cu litz wires

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Material wire insulation	Foamed PE (Data cable)
	PE (Power supply)
Single wire, color	red-black, blue-white
Twisted pairs	2 cores to the pair
Type of pair shielding	Plastic-coated aluminum foil, aluminum side outside
Overall twist	2 pairs around a drain wire in the center to the core
Optical shield covering	80 %
Insulation resistance	≥ 5 GΩ*km (Data cable)
	≥ 5 GΩ*km (Power supply)
Loop resistance	≤ 181.80 Ω/km (Data cable)
	≤ 114.80 Ω/km (Power supply)
Wave impedance	120 Ω ±10 % (with 1 MHz)
Cable capacity	nom. 40 nF/km (Data cable)
Nominal voltage, cable	≤ 300 V (Peak value, not for high-power applications)
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000.00 V (50 Hz, 1 min.)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	34 mm
Smallest bending radius, movable installation	67 mm
Max. bending cycles	5000000
Minimum bending radius, drag chain applications	10 x D
Bending radius	70 mm
Traversing path	4.5 m
Traversing rate	3 m/s
Acceleration	3 m/s ²
Shield attenuation	≤ 22.9 dB/km (with 1 MHz)
	≤ 16.4 dB/km (At 500 kHz)
	≤ 9.5 dB/km (At 125 kHz)
Halogen-free	in accordance with DIN VDE 0472 part 815
	according to IEC 60754-1
Flame resistance	IEC 60332-1-2
	in accordance with ISO 6722-1 5.22 (UN ECE-R 118.01)
Other resistance	Low adhesion
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-30 °C ... 70 °C (Cable, flexible installation)
	-20 °C ... 60 °C (for installation)
	-20 °C ... 60 °C (cable, drag chain applications)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Ambient temperature (operation)

-25 °C ... 90 °C (Plug / socket)


SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725


<https://www.phoenixcontact.com/us/products/1575725>

Drawings

Dimensional drawing

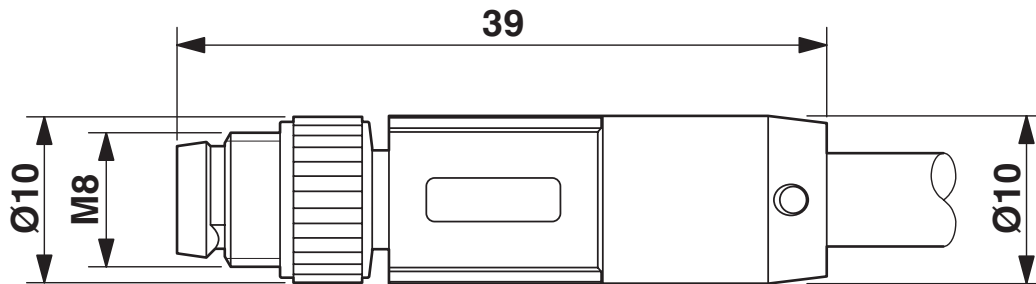

Circuit diagram

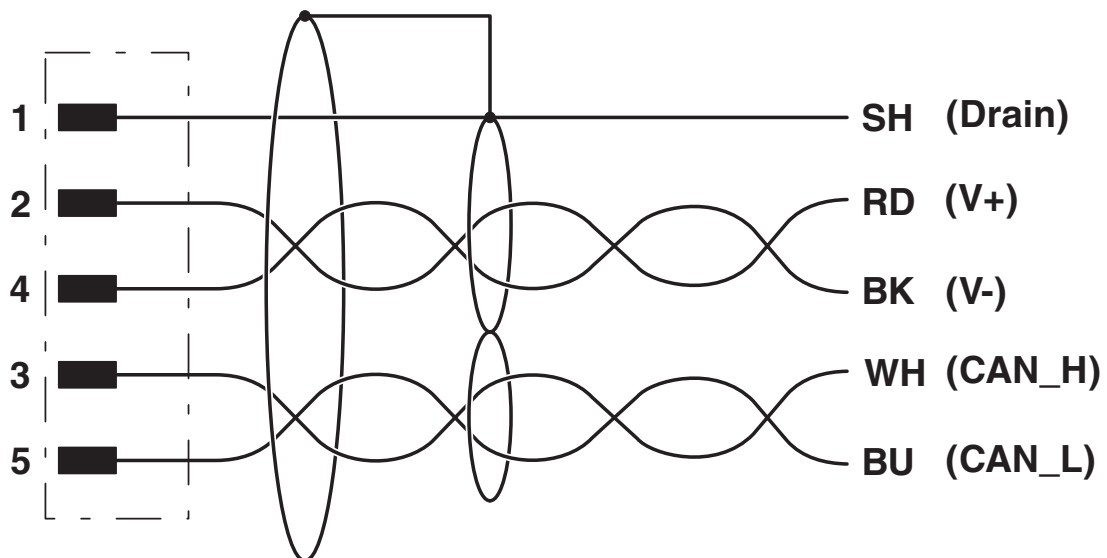


SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725

<https://www.phoenixcontact.com/us/products/1575725>



Schematic diagram

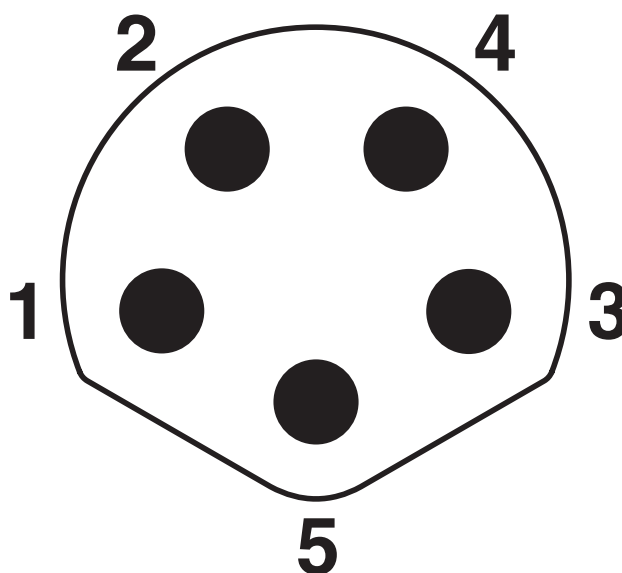

Pin assignment, pin side, M8, 5-pos., B-coded

SAC-5P-M 8MS/ 5,0-920 - Bus system cable





1575725

<https://www.phoenixcontact.com/us/products/1575725>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1575725>

 UL Listed Approval ID: FILE E 221474	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	30 V	3 A	-	-

 cUL Listed Approval ID: FILE E 221474	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	30 V	3 A	-	-

 EAC-RoHS Approval ID: RU D-DE.HB35.B.00387

cULus Listed

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Classifications

ECLASS

ECLASS-11.0	27060307
ECLASS-12.0	27060307
ECLASS-13.0	27060307

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

Accessories

SAC-5P-M 8MS DN TR - Termination resistor

1435988

<https://www.phoenixcontact.com/us/products/1435988>

Termination resistor, DeviceNet™, M8, 5-pos.




SAC-5P-M 8MS/920/... - Bus system cable

1575767

<https://www.phoenixcontact.com/us/products/1575767>

Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, Plug straight M8, coding: A, on free cable end, cable length: Free input (0.2 ... 40.0 m), Connector unshielded



SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725


<https://www.phoenixcontact.com/us/products/1575725>



SAC-5P-M 8MR/920/... - Bus system cable

1575903

<https://www.phoenixcontact.com/us/products/1575903>



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, Plug angled M8, coding: A, on free cable end, cable length: Free input (0.2 ... 40.0 m), Connector unshielded

SAC-5P-M 8FS/920/... - Bus system cable

1575819

<https://www.phoenixcontact.com/us/products/1575819>



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, free cable end, on Socket straight M8, coding: A, cable length: Free input (0.2 ... 40.0 m), Connector unshielded

SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725


<https://www.phoenixcontact.com/us/products/1575725>



SAC-5P-M 8FR/920/... - Bus system cable

1575916

<https://www.phoenixcontact.com/us/products/1575916>



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, free cable end, on Socket angled M8, coding: A, cable length: Free input (0.2 ... 40.0 m), Connector unshielded

SAC-5P-M 8MS-M 8FS/920/... - Bus system cable

1575893

<https://www.phoenixcontact.com/us/products/1575893>



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, Plug straight M8, coding: A, on Socket straight M8, coding: A, cable length: Free input (0.2 ... 40.0 m), Connector unshielded

SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725

<https://www.phoenixcontact.com/us/products/1575725>



SAC-5P-M 8MR-M 8FS/920/... - Bus system cable

1575932

<https://www.phoenixcontact.com/us/products/1575932>



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, Plug angled M8, coding: A, on Socket straight M8, coding: A, cable length: Free input (0.2 ... 40.0 m), Connector unshielded

SAC-5P-M 8MR-M 8FR/920/... - Bus system cable

1575945

<https://www.phoenixcontact.com/us/products/1575945>



Bus system cable, CANopen®, DeviceNet™, 5-position, PUR halogen-free, red lilac RAL 4001, shielded, Plug angled M8, coding: A, on Socket angled M8, coding: A, cable length: Free input (0.2 ... 40.0 m), Connector unshielded

SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725

<https://www.phoenixcontact.com/us/products/1575725>



PROT-M 8 FS-PA-CHAIN - Sealing cap

1430857

<https://www.phoenixcontact.com/us/products/1430857>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



SACC-M12FS-5PL SH DN - Data connector

1424672

<https://www.phoenixcontact.com/us/products/1424672>

Data connector, CANopen®, DeviceNet™, 5-position, shielded, Socket straight M12, coding: A, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm



SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725

<https://www.phoenixcontact.com/us/products/1575725>



SACC-M12MS-5PL SH DN - Data connector

1424670

<https://www.phoenixcontact.com/us/products/1424670>



Data connector, CANopen®, DeviceNet™, 5-position, shielded, Plug straight M12, coding: A, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

SACC-M12FR-5PL SH DN - Data connector

1424673

<https://www.phoenixcontact.com/us/products/1424673>



Data connector, CANopen®, DeviceNet™, 5-position, shielded, Socket angled M12, coding: A, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725

<https://www.phoenixcontact.com/us/products/1575725>



SACC-M12MR-5PL SH DN - Data connector

1424671

<https://www.phoenixcontact.com/us/products/1424671>



Data connector, CANopen®, DeviceNet™, 5-position, shielded, Plug angled M12, coding: A, Push-lock spring connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 4 mm ... 8 mm

SACC-M12FS-5QO SH DN - Data connector

1422760

<https://www.phoenixcontact.com/us/products/1422760>



Data connector, CANopen®, DeviceNet™, 5-position, halogen-free, shielded, Socket straight M12, coding: A, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 5 mm ... 9.7 mm

SAC-5P-M 8MS/ 5,0-920 - Bus system cable

1575725

<https://www.phoenixcontact.com/us/products/1575725>



SACC-M12MS-5QO SH DN - Data connector

1422759

<https://www.phoenixcontact.com/us/products/1422759>



Data connector, CANopen®, DeviceNet™, 5-position, halogen-free, shielded, Plug straight M12, coding: A, Insulation displacement connection, knurl material: Zinc die-cast, nickel-plated, external cable diameter 5 mm ... 9.7 mm

TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/us/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SAC-5P-M 8MS/ 5,0-920 - Bus system cable



1575725

<https://www.phoenixcontact.com/us/products/1575725>

SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/us/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com