

Features

- ◆ Plug-in module
- ◆ Easy to connect and replace in all MiBRX base modules
- ◆ Configured via Selpro software
- ◆ Spring fit terminals

Technical Specification

Output specifications


Relay output

No. of outputs	4
Output type	PNP
Response time	10 ms (Selectable through software via debounce parameter)
Output current	5A @ 230V AC, 5A @ 30V DC
Isolation between outputs	2.5kV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

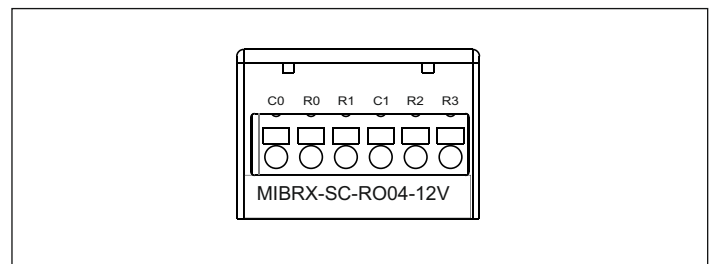

Ordering information

Product code	Description	Certification
MIBRX-SC-RO04-12V	MiBRX Slot Card - 4 Relay Output (12V)	CE 