


CUST.MODEL:	REF.
CUST.P/N:	DWG FILE:

ROHS COMPLIANT

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1.0	DRAWING RECEIVED	2013.09.10	John

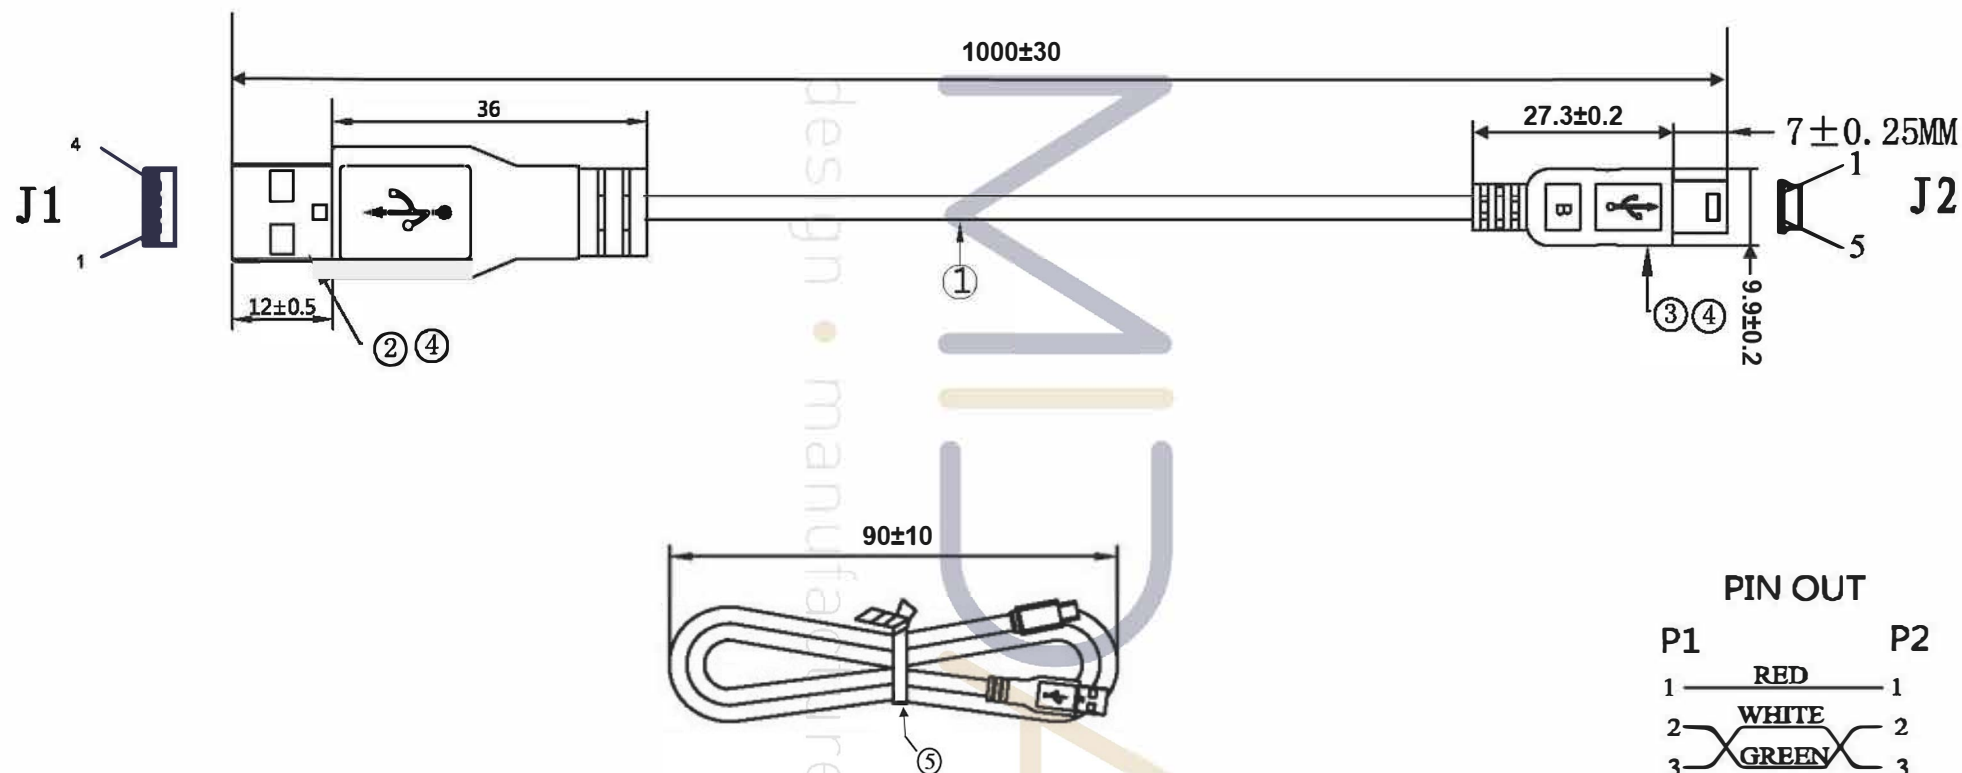

NOTE:

- 100% OPEN&SHORT AND MISS WIRE TEST.
- CONDUCTOR RESISTANCE:5 Ohm(Max).
- INSULATION RESISTANCE:5MOhm(Min).
- RATING VOLTAGE:DC 300V,10mS.
- ALL MATERIAL MUST MEET RoHS.

PIN OUT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
4	BLACK	5	
SHELL		SHELL	

5	BLACK MINI TIE L=80MM	1PC
4	黑色 45P PVC胶料	25g
3	MINI 5P USB 黑胶芯 焊线三件式	1PC
2	USB TYPE A MALE ,COLD G/F,STEEL NICKEL PLATED ,BLACK INSULATION	1PC
1	UL2725 28*1P+28*2C+AB OD:3.8MM BLACK	1PC
PART	DESCRIPTION	QTY

CABLE MARKING:

THIRD ANGLE PROJECTION	
DRAW:	DATE:
CHECK:	APPROVE:
DO NOT SCALE ALL DIMENSIONS IN mm	

TITLE: USB TO MINI USB

MODEL CODE: USB0001

MIDAS