

PART NO.

P2RFC-2265-XX

REV

DESCRIPTION


DWN

DATE

APPROVED

— ENGINEERING RELEASE

CZS 11/11/16 JDMc

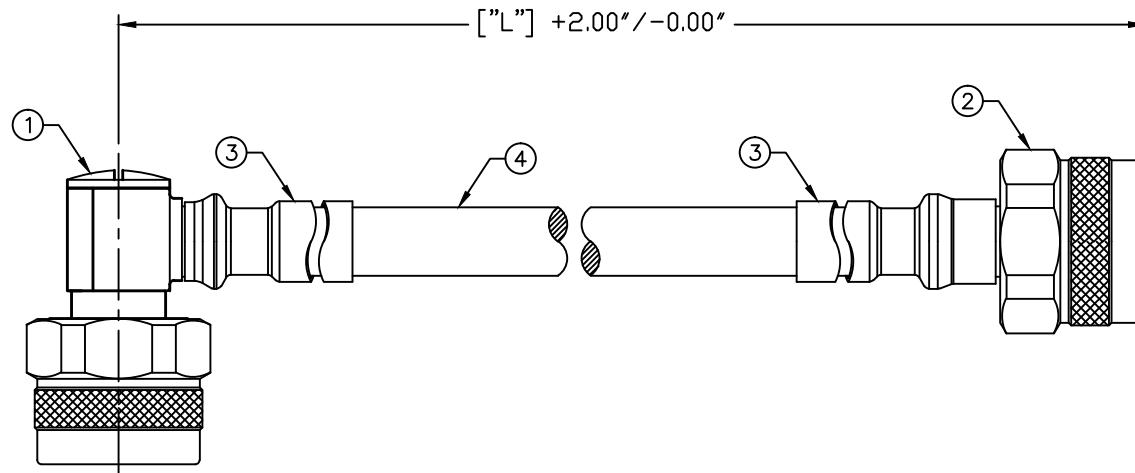

P2RFC-0000-XX
 [L] LENGTH IN INCHES
 CONFIGURATION ID
 CABLE ASSEMBLY DESIGNATOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0–6 GHz

3RD ORDER IM: ≤ -155 dBc @ 700MHz & 1900MHz

3RD ORDER IM TEST METHOD: TWO+43dBm CARRIERS

VSWR: $\leq 1.15:1$ THRU 3GHz

FOR:SPP-250-LLPL, SPO-250 & FSJ1-50A

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

4	COAX CABLE	1	1/4" SUPER FLEXIBLE	---
3	TUBING	2	HEAT SHRINK	---
2	RFN-1002-HPL	1	N MALE CONNECTOR	WHITE BRONZE
1	RFN-1009-HPL	1	N MALE RIGHT ANGLE	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	

DRAWN	C. ZUNIGA	11/11/16
CHECKED		
ORIG DRAWN	C. ZUNIGA	11/11/16

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

N MALE RIGHT ANGLE TO N MALE
CABLE ASSEMBLY

SIZE	CABLE GROUP	DWG NO.	REV
A	HPL	P2RFC-2265-XX	—
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	