

Data sheet | Item number: 770-401

Coding pin; for plugs; Plastic; gray

[www.wago.com/770-401](http://www.wago.com/770-401)



## Item description

### Coding WINSTA® MIDI

Choose tried-and-tested sustainability for the installation for the implementation of your project: The coding from the WINSTA® MIDI product line. A comprehensive range of accessories rounds out the WINSTA® product line from WAGO. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates safe electrification. Due to the built-in test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and costs.

### WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, even more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.



—  
Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



- for automation controllers
- fast, secure installation

## Data

### Mechanical data

Suitable	for plug; A- and B-coding
----------	---------------------------

### Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.002 MJ
Weight	0.1 g

### Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

### Commercial data

Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
ECCN	NO DATA
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4017332801935
Customs tariff number	39269097900

Subject to changes. Please also observe the further product documentation!



## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Downloads Documentation

#### Bid Text

770-401 X81 - Datei	19 февр. 2019 г.	xml 2.6 kB	Download
770-401 doc - Datei	13 янв. 2015 г.	doc 22.0 kB	Download

### CAD/CAE-Data

#### CAD data

2D/3D Models 770-401	URL	Download
----------------------	-----	----------

#### CAE data

WSCAD Universe 770-401	URL	Download
ZUKEN Portal 770-401	URL	Download

#### Asset Administration Shell

Asset Administration Shell 770-401	URL	Download
------------------------------------	-----	----------

## Environmental Product Compliance


### Compliance Search

Environmental Product Compliance 770-401 Coding pin; for plugs; Plastic; gray	URL	Download
--	-----	----------

## Installation Notes

### Coding

Subject to changes. Please also observe the further product documentation!

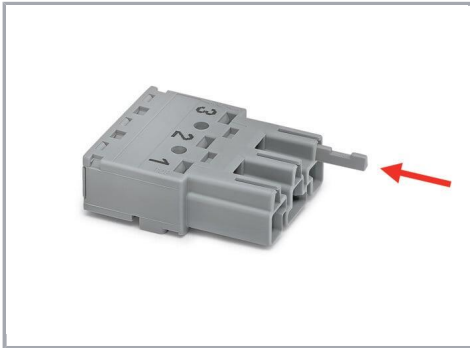

Insert coding pin into plug (break first) until it engages.

## Product family

### WINSTA® MIDI

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.