


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

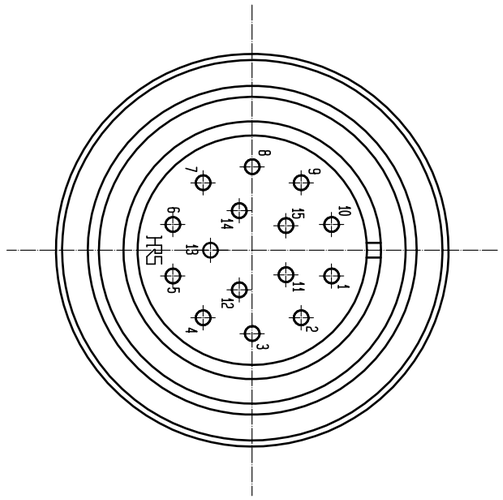

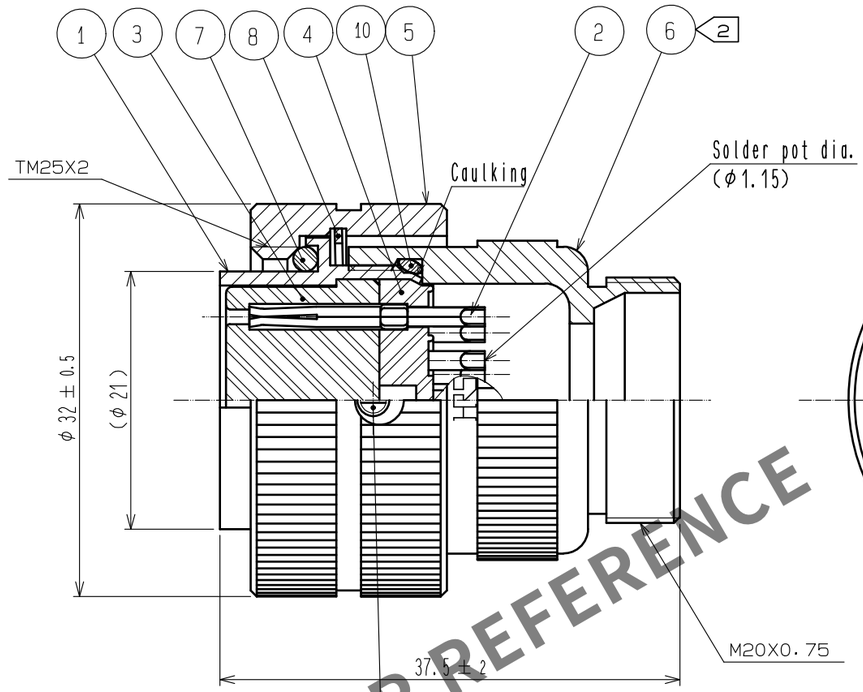

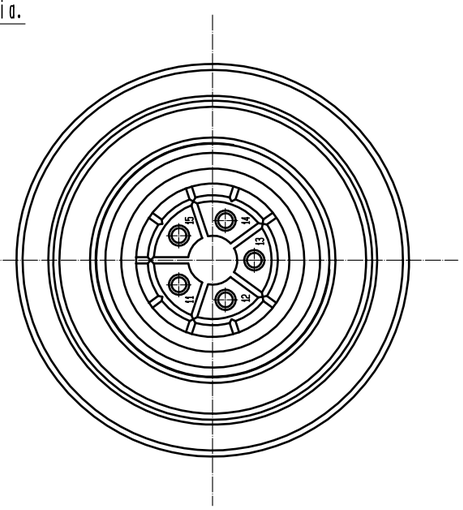

HRS DRAWING FOR REFERENCE

Notes
1. One example of the rotation of ref. No. ⑥ to ref. No. ① is shown.
2. The recommended clamp torque of ref. No. ⑥ : 2 to 3 N・m.
3. The recommended clamp torque of ref. No. ⑨ : 0.2 to 0.3 N・m.
   LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑥ and ref. No. ⑧ from loosening.
4. This products to be used with cable clamp RM21WTP-CP※(71)
   ※ designate diameter of applicable cable.
5. The cable pull and twisting strength and other characteristics may differ, depending on the cable structure.
   Please confirm before the use.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
5	BRASS	NICKEL PLATING	10	CHLOROPRENE RUBBER	(BLACK)
4	PPS	(BLACK) UL94V-0	9	BRASS	NICKEL PLATING
3	PPS	(BLACK) UL94V-0	8	PHOSPHOR BRONZE	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5 μm.	7	CHLOROPRENE RUBBER	(BLACK)
1	BRASS	NICKEL PLATING	6	BRASS	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	0				

HIROSE ELECTRIC CO., LTD.

APPROVED	HY. KOBAYASHI	18. 02. 22
CHECKED	HY. KOBAYASHI	18. 02. 22
DESIGNED	HY. KISHI	18. 02. 22
DRAWN	MK. INOUE	18. 02. 08

DRAWING NO.	EDC-110102-31-00
PART NO.	RM21WTP-15S(31)
CODE NO.	CL109-1401-2-31

0 1/1