
ADELS contact

## Fused Terminal Blocks

# 1003 SI/ 3 DS GW

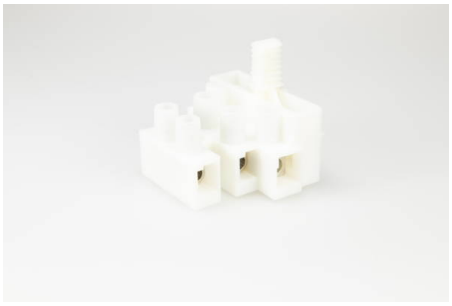

## Order Info

| | |
|---|---|
| **reference number (ref. no.)** | 11630 |
| **PU** | 200 |
| **EAN** | 4028012131464 |

## Type

| | |
|---|---|
| **Type** | screw terminal block with fuse holder 6,3x25/6,3x32 |
| **connection type** | screw |
| **number of poles** | 3 pole |
| **colour** | naturalal |
| **wire protection** | yes |

## Electrical Data

| | |
|---|---|
| **rated voltage** | 500 V |
| **rated current** | 16 A |

## Connection Data

| | |
|---|---|
| **cross-section rating** | 4.0 $mm^2$ |
| **cross-section rating (UL)** | 22-10 AWG |
| **clamping range** | 0.5 - 10.0 $mm^2$ |
| **type of conductor** | fine stranded, stranded, solid |
| **type of conductor internal** | fine stranded, stranded, solid |
| **type of conductor external** | fine stranded, stranded, solid |
| **stripping length** | 7.5 - 8.0 mm |
| **clamping units per pole** | 1 |
| **contact screw assembly** | 0.8 x 4.0 / ↻ 0.8 Nm |
| **socket diameter** | 3.70 mm |

## Ambient Conditions

| | |
|---|---|
| **$T_{max}$ ambient air (at rated current)** | 85 °C |
| **$T_{min}$ ambient air (operation)** | -40 °C |

## Materials

| | |
|---|---|
| **insulator material** | PA GW |
| **contact material** | brass |
| **flammability rating acc. to UL 94** | V-2 |

## Approvals

| | |
|---|---|
| **acc. to EN 60127** | yes |
| **acc. to UL** | yes |
| **acc. to CSA** | yes |

## Accessories

| | |
|---|---|
| **ZEL 110** | 196420 |