



Low PIM TNC Male to TNC Female Adapter

RF Adapters Technical Data Sheet

PE91173

Configuration

- TNC Male Connector 1
- TNC Female Connector 2
- 50 Ohms
- Low PIM Design
- Straight Body Geometry

Features

- Max VSWR of 1.25:1 up to 6 GHz
- PIM levels lower than -150 dBc
- Silver Plated Beryllium Copper Contact
- 5µm min Silver Contact Plating

Applications

- Connector Saver
- General Purpose Test

Description

Pasternack's PE91173 Low PIM TNC male to TNC female adapter is part of our full line of RF components available for same-day shipping. Our TNC to TNC adapter has a male to female gender configuration in a Low PIM design. PE91173 TNC male to TNC female adapter operates to 6 GHz. The Pasternack RF adapter provides excellent VSWR of 1.25:1 maximum and passive intermodulation of -150 dBc maximum. The PE91173 Pasternack RF adapter can also be used as a connector saver to extend equipment life.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Passive Intermodulation using 2x20W tones (800MHz)			-150	dBc
Operating Voltage (AC)			500	Vrms
Dielectric Withstanding Voltage (AC)			1,500	Vrms

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Size

Length 1.23 in [31.24 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM TNC Male to TNC Female Adapter PE91173](#)



Low PIM TNC Male to TNC Female Adapter

RF Adapters Technical Data Sheet

PE91173

Width 0.56 in [14.22 mm]
Weight 0.08 lbs [36.29 g]

Description	Connector 1	Connector 2
Type	TNC Male	TNC Female
Polarity	Standard	Standard
Hex Size	14 mm	

Material Specifications

Description	Material	Plating	Material	Plating
Type	TNC Male		TNC Female	
Contact	Beryllium Copper	Silver 5 µm minimum	Beryllium Copper	Silver 5 µm minimum
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Tri-Metal 3µm minimum
Body	Brass	Tri-Metal 3µm minimum		
Coupling Nut	Brass	Tri-Metal 3 µm minimum		

Environmental Specifications

Temperature

Operating Range -45 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM TNC Male to TNC Female Adapter PE91173](#)



Low PIM TNC Male to TNC Female Adapter

RF Adapters Technical Data Sheet

PE91173


Low PIM TNC Male to TNC Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM TNC Male to TNC Female Adapter PE91173](#)

URL: <https://www.pasternack.com/tnc-male-tnc-female-straight-adapter-pe91173-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91173 CAD Drawing
Low PIM TNC Male to TNC Female Adapter

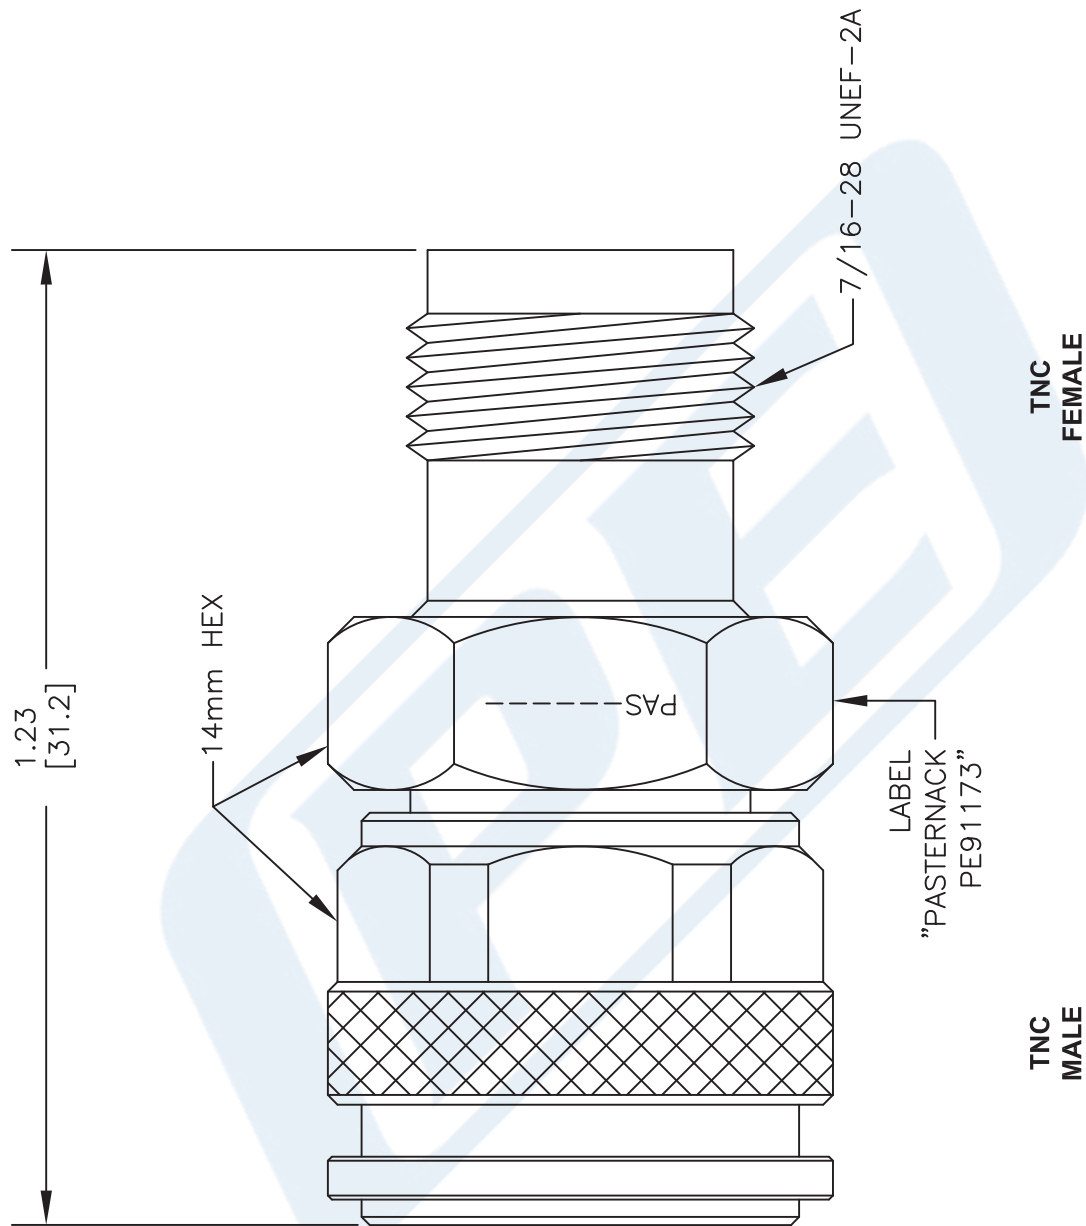

STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE91173

FSCM NO. 53919

CAD FILE 082616

SCALE N/A

SIZE A

41742

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].