

2J0A02-2.4-C166G

2.4 GHz ISM Connector Mount

Key Features

2.4 GHz ISM

- 2410-2490 MHz

Connector Mount

High Efficiency

Ground Plane Dependent

Dimensions 44 × 9.6 mm



1. Antenna and electrical specifications

Parameters	2.4 GHz ISM Antenna
Standards	WiFi, BT, ZigBee, ISM
Band (MHz)	2.4 Ghz
Frequency (MHz)	2410-2490
Return Loss (dB)	~4.2
VSWR	~4.1:1
Efficiency (%)	~61
Peak Gain (dBi)	~3.5
Average Gain (dB)	~-2.1
Impedance (Ohm)	50
Polarisation	Linear
Radiation Pattern	Omni-Directional
Max. Input Power (W)	25
Connector Type	RP-SMA-Male Standard

Antenna Measurement Conditions:



Mounted on 70x35 mm Ground Plane



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2J0A02-2.4-C166G
Mounting Type	Connector Mount
Dimensions (mm)	44 x 9.6
Radome	ASA UV Stable
Radome color	Black
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

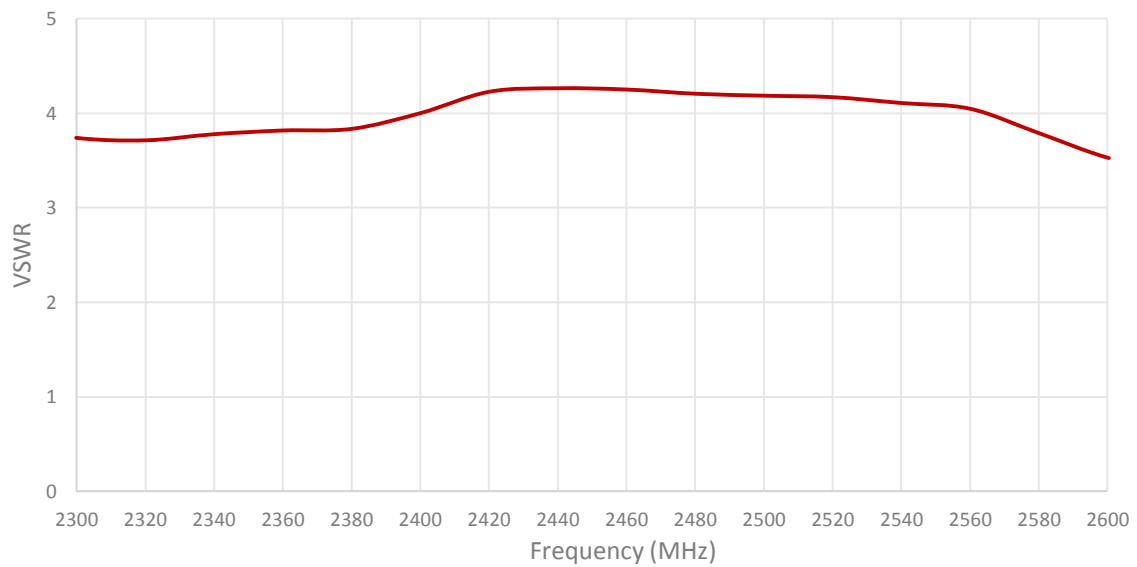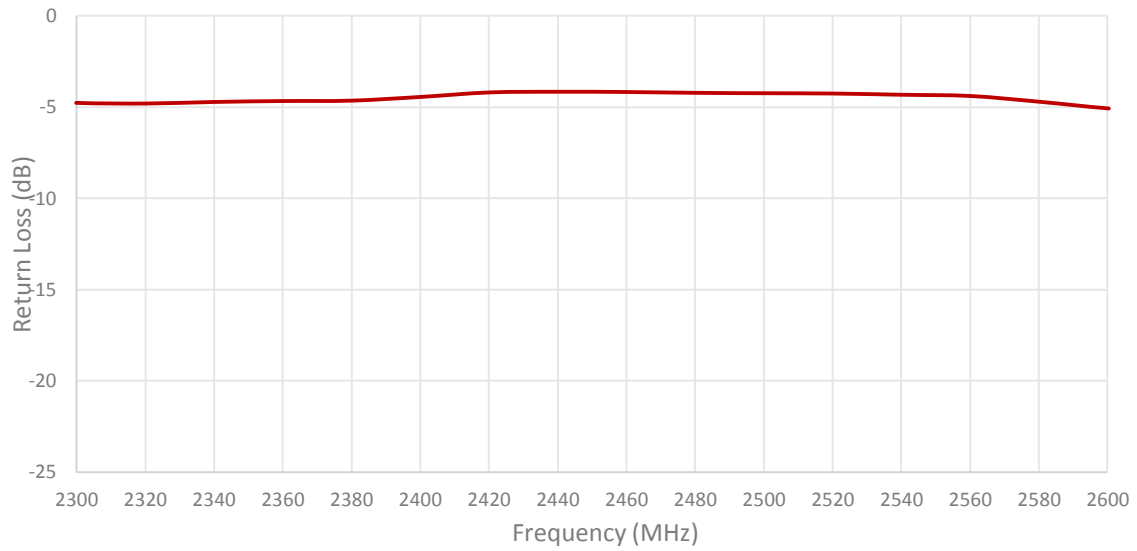

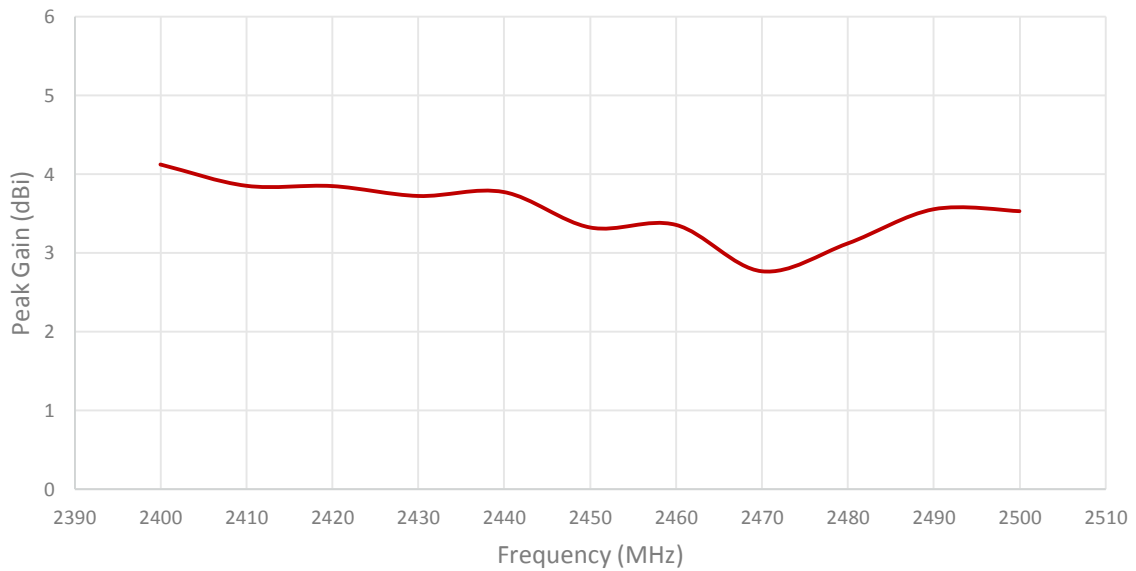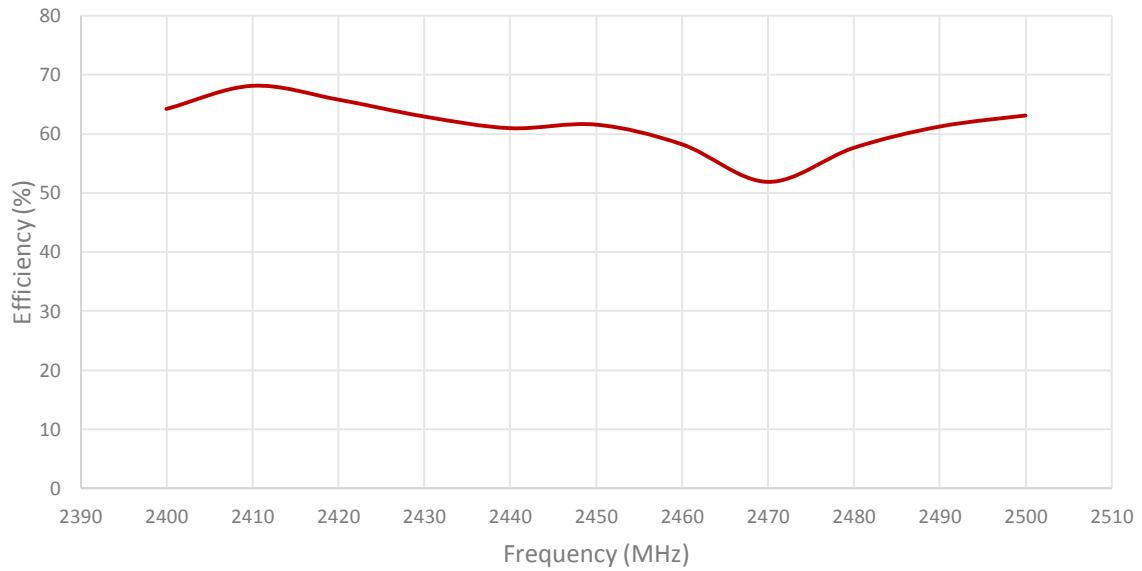

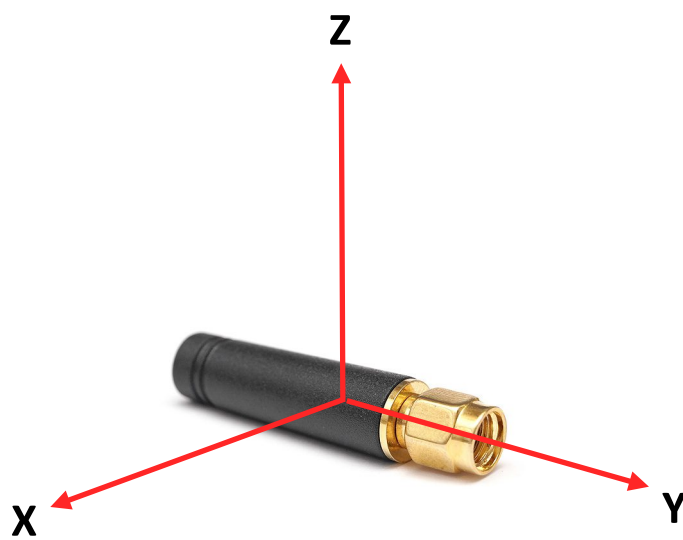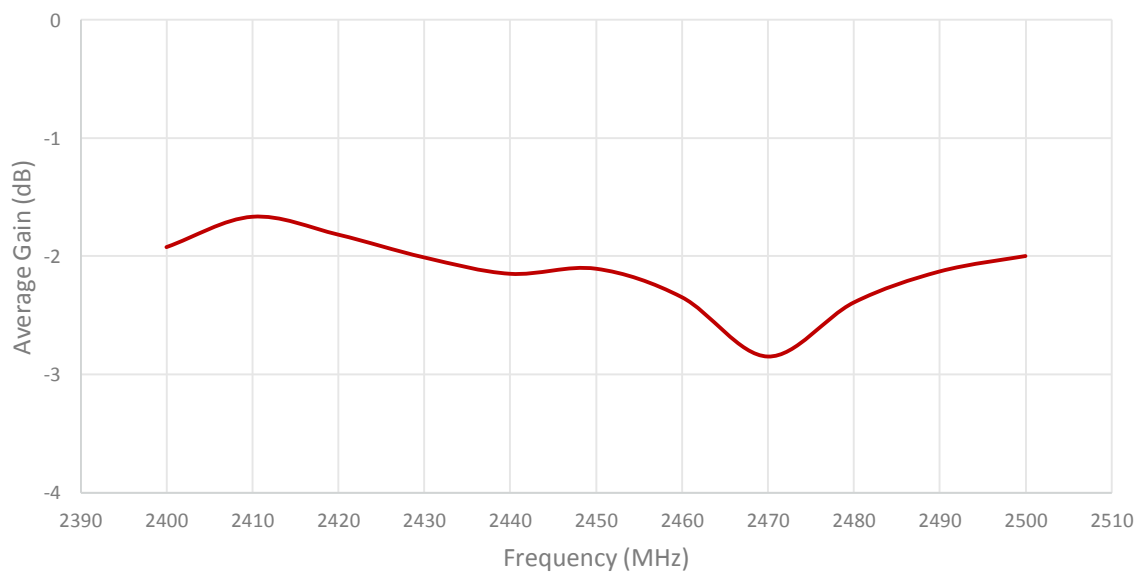


Radiation pattern reference

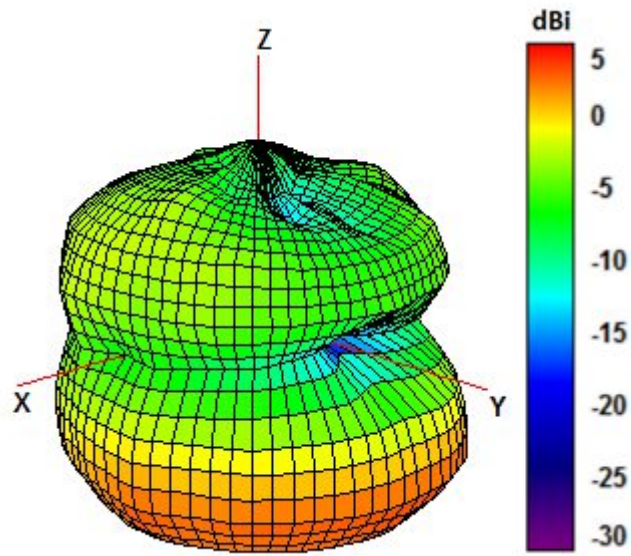

2450 MHz Radiation pattern

4. Antenna drawings

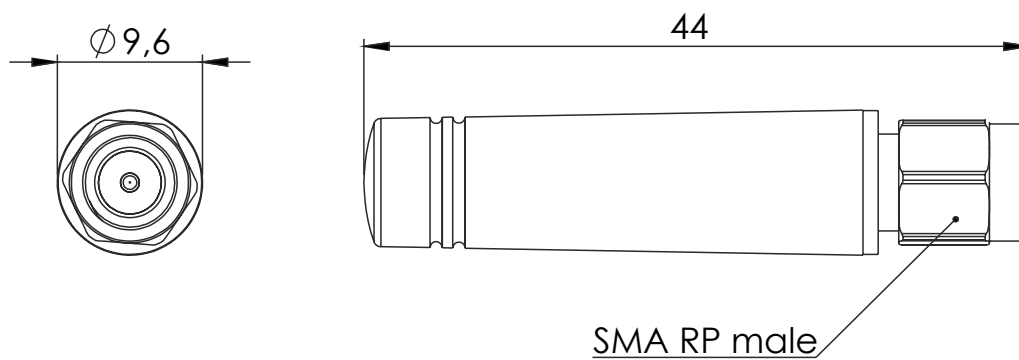

5. Antenna Images

