Pushing Performance
Since 1945

# SEK mezz Fe 26P THT 4.5mm PL2

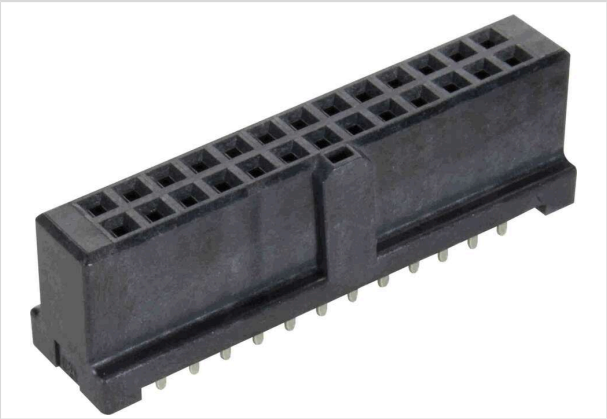


Image is for illustration purposes only. Please refer to product description.

| | |
|---|---|
| Part number | 09 19 526 6822 |
| Specification | SEK mezz Fe 26P THT 4.5mm PL2 |
| HARTING eCatalogue | https://b2b.harting.com/09195266822 |

## Identification

| | |
|---|---|
| Category | Connectors |
| Series | SEK Mezzanine |
| Element | Female connector |
| Description of the contact | Straight |

## Version

| | |
|---|---|
| Termination method | Reflow soldering termination (THR)<br>Wave soldering termination |
| Connection type | PCB to PCB<br>Motherboard to daughtercard |
| Number of contacts | 26 |
| Termination length | 4.5 mm |

## Technical characteristics

| | |
|---|---|
| Contact rows | 2 |
| Contact spacing (termination side) | 2.54 mm |
| Rated current | 1 A |
| Insulation resistance | $>10^9$ Ω |
| Contact resistance | ≤20 mΩ |
| Limiting temperature | -55 ... +125 °C (during reflow soldering max. +240 °C for 60 s) |
| Insertion force | ≤52 N |
| Withdrawal force | ≤52 N |
| Performance level | 2 |
| Mating cycles | ≥250 |


HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com

Pushing Performance
Since 1945

## Technical characteristics

| | |
|---|---|
| Test voltage $U_{r.m.s.}$ | 1 kV |
| Isolation group | IIIa (175 ≤ CTI < 400) |

## Material properties

| | |
|---|---|
| Material (insert) | Liquid crystal polymer (LCP) |
| Colour (insert) | Black |
| Material (contacts) | Copper alloy |
| Surface (contacts) | Sn over Ni Termination side<br>Au over Pd/Ni Mating side |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Not contained |
| California Proposition 65 substances | Not contained |

## Specifications and approvals

| | |
|---|---|
| Specifications | IEC 60603-13 |
| UL / CSA | UL 1977 ECBT2.E102079<br>CSA-C22.2 No. 182.3 ECBT8.E102079 |

## Commercial data

| | |
|---|---|
| Packaging size | 100 |
| Net weight | 6.9 g |
| Country of origin | China |
| European customs tariff number | 85366990 |
| GTIN | 5713140212701 |
| ETIM | EC002637 |
| eCl@ss | 27460201 PCB connector (board connector) |


HARTING Electronics GmbH | Marienwerderstraße 3 | 32339 Espelkamp | Germany
Phone +49 5772 47-97200 | electronics@HARTING.com | www.HARTING.com