

PART NO.	RFPT-43F-C20			
REV	DESCRIPTION	DWN	DATE	APPROVED
A	CHANGED IMAGE	CZS	11/28/18	JDMc



MOUNTING BRACKET INCLUDED

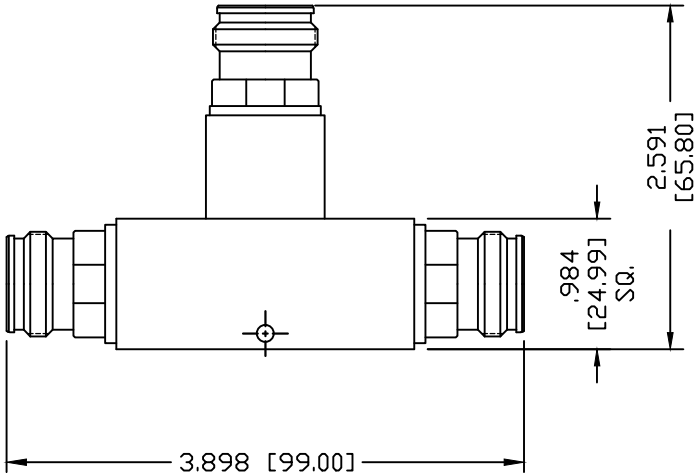

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 698–2700 MHz
COUPLING: 20±1.5 dB
INSERTION LOSS: 0.1±0.1
VSWR: 1.15:1
POWER RATING: 200W
3RD INTERMODULATION: –160 dBc (RELATIVE TO CARRIER)
3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS
TEMPERATURE RANGE: –35°C ~ +85°C
APPLICATION: INDOOR/OUTDOOR
REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

NOTES:
ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN C. ZUNIGA	11/28/18
CHECKED	
ORJ DRAWN C. ZUNIGA	09/12/18

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549–6340
(858) 549–6345 FAX

20 dB POWER TAPPER
4.3-10 FEMALE - 698-2700 MHz

SIZE	CABLE GROUP	DWG NO.	REVISION
A		RFPT-43F-C20	A

SCALE:	ENGINEERING ID:	SHEET
NTS	000000	1 OF 1