


PART NO.		RPT-NE-PS20		
REV	DESCRIPTION	DWN	DATE	APPROVED
—	REL	DM	11/19/20	JDM

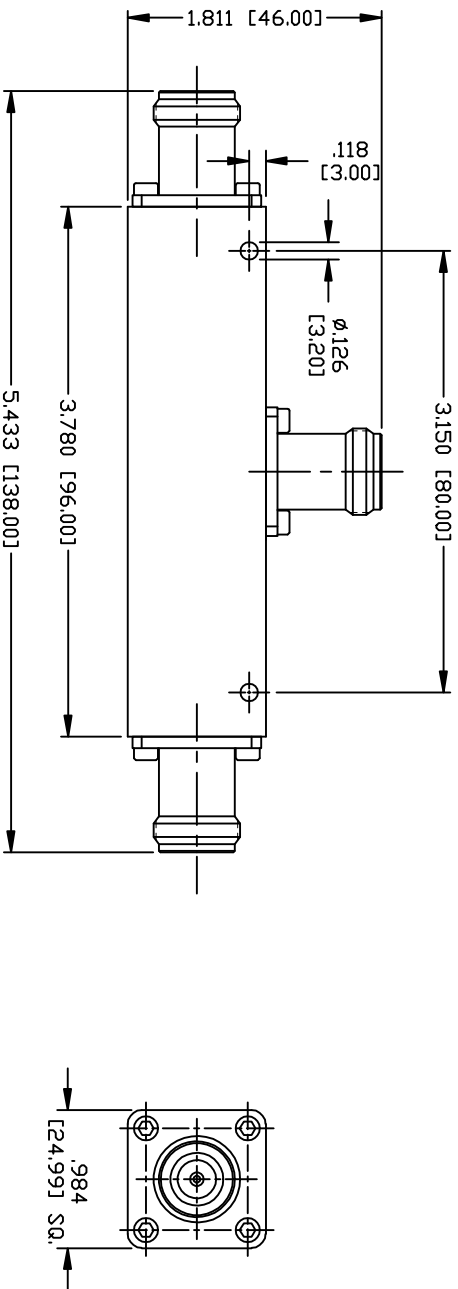

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY BAND: 138–960 MHz
 POWER: 200 WATT
 INSERTION LOSS:
 –20.3±1.0 @ 137–200 MHz
 –20.1±1.0 @ 200–250 MHz
 –20.0±1.0 @ 250–380 MHz
 –20.1±1.0 @ 380–520 MHz
 –21.1±0.8 @ 698–960 MHz
 NOMINAL RATIO: 100:1/20dB
 OUTPUT SPLIT: –0.4/20.1
 VSWR: 1.2 @ 147–380
 VSWR: 1.2 @ 380–960
 OPERATION TEMPERATURE: –35°C ~ +75°C
 HUMIDITY: 5–95%
 COLOR: RED
 APPLICATION: INDOOR/OUTDOOR IP65
 COMPLIANCE: RoHS
 WEIGHT: 0.53 lbs

CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		RF 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6346 FAX DIVISION OF RF INDUSTRIES, LTD.	
D.McREYNOLDS CHECKED C. ZUNIGA	11/19/20 05/02/19	SIZE A SCALE: NTS	CABLE GROUP ENGINEERING ID:	DWG NO. RPT-NE-PS20	REVISION —
20 dB POWER TAPPER N FEMALE - 138-960 MHZ		SHEET 1 OF 1			