

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.5版

MAX ECHO

| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 1 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |

1. Scope

This specification applies to the HBLS-0603 series Multilayer Ceramic Chip Inductors

2. Standard and Atmospheric Conditions

Unless otherwise specified the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature : $20 \pm 15^\circ\text{C}$


Relative humidity : 30~70%

If there may be any doubt on the results, measurements shall be made within the following limits :

Ambient temperature : $25 \pm 5^\circ\text{C}$

Relative humidity : 30~70%

3. Dimensions

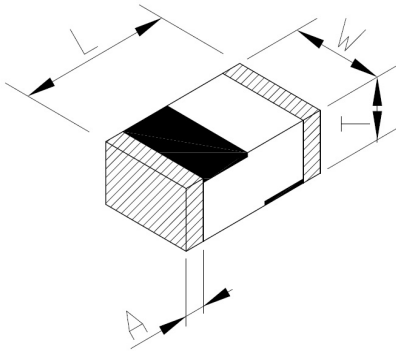

OPERATING TEMP. RANGE : $-55^\circ\text{C} \sim +125^\circ\text{C}$

STORAGE TEMP. RANGE : $-40^\circ\text{C} \sim +85^\circ\text{C}$

unit:
mm
(inch)

| TYPE | L | W | T | A |
|-----------|---|---|---|--|
| HBLS-0603 | 0.6 ± 0.03 (0.024 ± 0.001) | 0.3 ± 0.03 (0.012 ± 0.001) | 0.3 ± 0.03 (0.012 ± 0.001) | $0.1 \sim 0.2$ ($0.004 \sim 0.008$) |

4. The Place of Origin :

Taichung, Taiwan

| | | | |
|------------|------------|-------------|---------------|
| PLANNED BY | CHECKED BY | APPROVED BY | 鈺鎧文件中心 發行章 |
| Marco | LUN | Tina Hsu | |

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.5版

MAX ECHO

| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 2 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |

5. Electrical specifications

| PART NO. | AT100 MHz 250mV | | | SELF-RESONANT FREQUENCY (MHz) | | DC RESISTANCE (Ω) Max. | RATED CURRENT (mA) Max. |
|----------------|--------------------|------------|-----------|-------------------------------|--------|---------------------------|----------------------------|
| | INDUCTANCE (nH) | TOLERANCE | Q Min. | Min. | Typ. | | |
| | | | | HBLS0603-1N0_M | 1.0 | ±0.1~0.3nH | 4 |
| HBLS0603-1N2_M | 1.2 | ±0.1~0.3nH | 4 | 10000 | >13000 | 0.12 | 450 |
| HBLS0603-1N5_M | 1.5 | ±0.1~0.3nH | 4 | 10000 | >13000 | 0.13 | 430 |
| HBLS0603-1N8_M | 1.8 | ±0.1~0.3nH | 4 | 10000 | >13000 | 0.16 | 390 |
| HBLS0603-2N0_M | 2.0 | ±0.1~0.3nH | 4 | 10000 | >13000 | 0.17 | 380 |
| HBLS0603-2N1_M | 2.1 | ±0.1~0.3nH | 4 | 10000 | >13000 | 0.17 | 380 |
| HBLS0603-2N2_M | 2.2 | ±0.1~0.3nH | 4 | 8800 | 12500 | 0.19 | 360 |
| HBLS0603-2N4_M | 2.4 | ±0.1~0.3nH | 4 | 8300 | 11700 | 0.2 | 350 |
| HBLS0603-2N7_M | 2.7 | ±0.1~0.3nH | 4 | 7700 | 11000 | 0.21 | 340 |
| HBLS0603-3N0_M | 3.0 | ±0.1~0.3nH | 4 | 7200 | 11000 | 0.22 | 330 |
| HBLS0603-3N3_M | 3.3 | ±0.1~0.3nH | 4 | 6700 | 9600 | 0.23 | 320 |
| HBLS0603-3N6_M | 3.6 | ±0.1~0.3nH | 4 | 6400 | 9100 | 0.25 | 310 |
| HBLS0603-3N9_M | 3.9 | ±0.1~0.3nH | 4 | 6000 | 8600 | 0.27 | 300 |
| HBLS0603-4N3_M | 4.3 | ±0.1~0.3nH | 4 | 5700 | 8100 | 0.3 | 280 |
| HBLS0603-4N7_M | 4.7 | ±0.1~0.3nH | 4 | 5300 | 7600 | 0.3 | 280 |
| HBLS0603-5N1_M | 5.1 | ±0.1~0.3nH | 4 | 5000 | 7100 | 0.33 | 270 |
| HBLS0603-5N6_M | 5.6 | ±0.1~0.3nH | 4 | 4600 | 6600 | 0.36 | 260 |
| HBLS0603-6N2_M | 6.2 | ±0.1~0.3nH | 4 | 4200 | 6100 | 0.38 | 250 |
| HBLS0603-6N8_M | 6.8 | ±3%,±5% | 4 | 3900 | 5600 | 0.39 | 250 |
| HBLS0603-7N5_M | 7.5 | ±3%,±5% | 4 | 3600 | 5300 | 0.41 | 240 |
| HBLS0603-8N2_M | 8.2 | ±3%,±5% | 4 | 3400 | 4900 | 0.45 | 230 |
| HBLS0603-9N1_M | 9.1 | ±3%,±5% | 4 | 3200 | 4600 | 0.48 | 220 |
| HBLS0603-10N_M | 10 | ±3%,±5% | 4 | 2900 | 4200 | 0.51 | 220 |
| HBLS0603-12N_M | 12 | ±3%,±5% | 4 | 2700 | 3800 | 0.68 | 190 |
| HBLS0603-15N_M | 15 | ±3%,±5% | 4 | 2300 | 3100 | 0.71 | 180 |
| HBLS0603-18N_M | 18 | ±3%,±5% | 4 | 2100 | 3000 | 0.81 | 170 |
| HBLS0603-22N_M | 22 | ±3%,±5% | 4 | 1800 | 2600 | 1.0 | 150 |
| HBLS0603-27N_M | 27 | ±3%,±5% | 4 | 1800 | 2600 | 1.35 | 120 |
| HBLS0603-33N_M | 33 | ±3%,±5% | 4 | 1700 | 2300 | 1.47 | 110 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

E:±0.1nH B:±0.2nH S:±0.3nH H:±3% J:±5%

表格編號：034承認書 A

MAX ECHO 鈺鎧科技股份有限公司規格標準書


COMPONENT SPECIFICATION

版次：第3.5版


MAX ECHO

| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 3 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |


0603 INDUCTANCE VS FREQUENCY CHARACTERISTICS

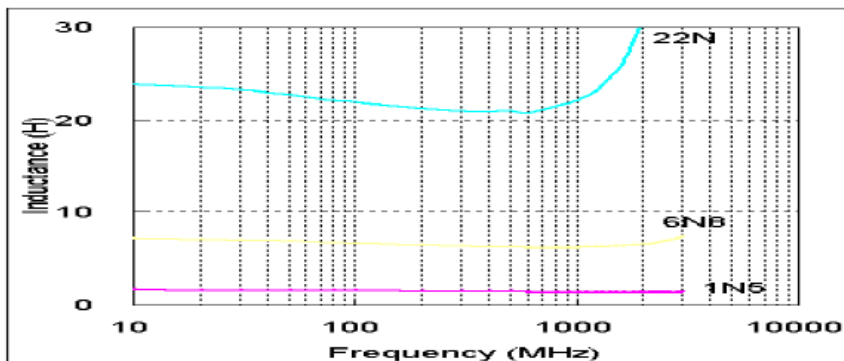

0603 Q VS FREQUENCY CHARACTERISTICS

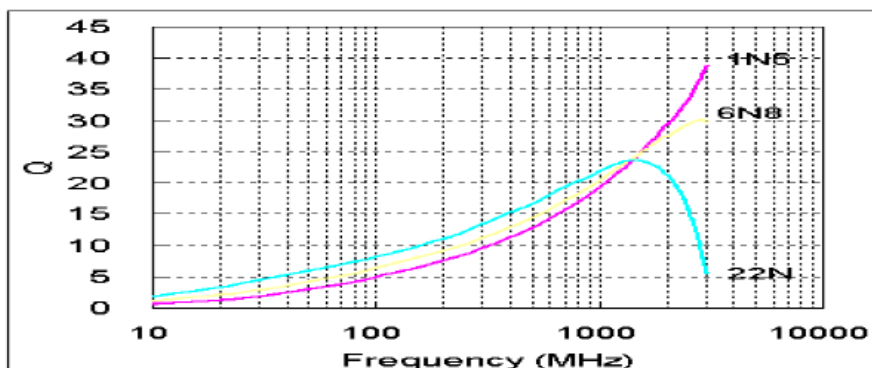

0603 Z VS FREQUENCY CHARACTERISTICS

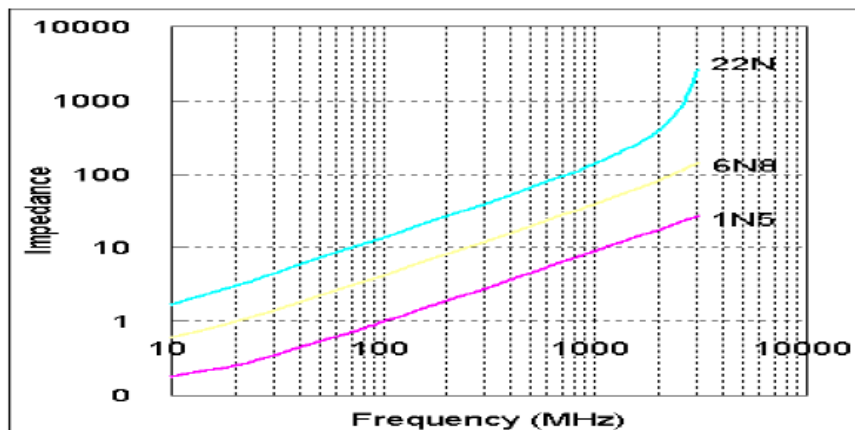

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION


版次：第3.5版

MAX ECHO


| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 4 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |

6. Reflow soldering conditions

- Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max. Insufficient pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.
- Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode, when soldering is repeated, allowable time is the accumulated time.

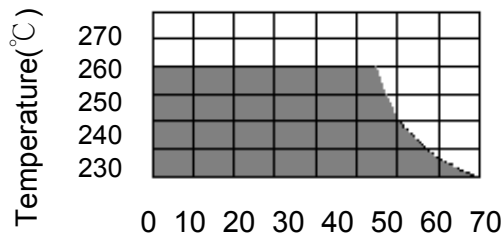

Temperature Profile

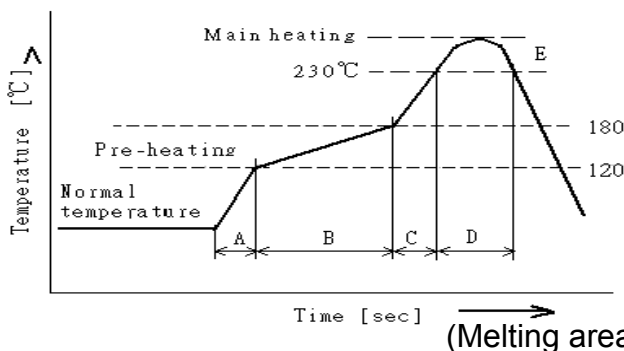

| | | | |
|-----------------|---------------------|------------|----------|
| A | Slope of temp. rise | ※ 1 to 5 | ※ °C/sec |
| B | Heat time | 50 to 150 | ※ sec |
| | Heat temperature | 120 to 180 | ※ °C |
| C | Slope of temp. rise | 1 to 5 | ※ °C/sec |
| D | Time over 230°C | 90~120 | ※ sec |
| E | Peak temperature | 255~260 | ※ °C |
| | Peak hold time | 10 max. | ※ sec |
| No. of mounting | | 3 | ※ times |

6-1 Reworking with soldering iron


| | |
|-----------------------|-----------------|
| Preheating | 150°C, 1 minute |
| Tip temperature | 280°C max. |
| Soldering time | 3 seconds max. |
| Soldering iron output | 30w max. |
| End of soldering iron | φ 3mm max. |

- Reworking should be limited to only one time.

Note : Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the ferrite material due to the thermal shock.

6-2 Solder Volume

Solder shall be used not to be exceed the upper limits as shown below.

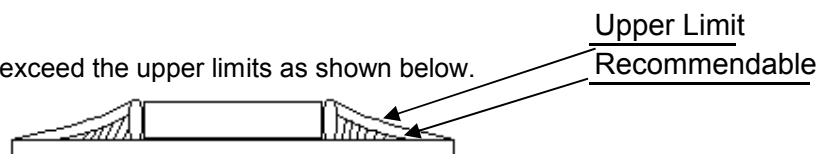

When the amount of solder volume increased, mechanical stress increased as well. Exceeding amount of solder volume may lead to failure of mechanical or electrical characteristics.

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.5版

MAX ECHO

| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 5 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |

7. Equipment



7-1 Inductance

Inductance shall be measured with HP – 4286A impedance analyzer or equivalent system

7-2 DC RESISTANCE

DC resistance shall be measured using HP 4338 digital milli – ohm meter with 4 terminal method.

8. Mechanical Characteristics
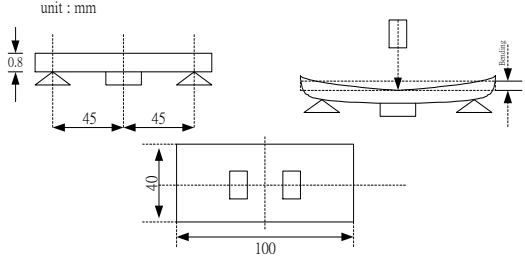
| ITEM | Specification | Test Conditions | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------|--|--|----------|-------------|-----------|------|-----------|----------|-----------|-----------|----------|------|-----------|----------|------|-------------|----------|------|-------------|----------|------|-------------|----------|------|-------------|----------|------|-------------|----------|
| Terminal Strength | Terminal strength does not distort the case shall meet SPEC DC resistance specifications. | <table border="1"> <thead> <tr> <th>SMD-Size</th> <th>Force g (N)</th> <th>Time Sec.</th> </tr> </thead> <tbody> <tr> <td>0402</td> <td>300g (3N)</td> <td>60+1sec.</td> </tr> <tr> <td>0504/0603</td> <td>500g (5N)</td> <td>60+1sec.</td> </tr> <tr> <td>0805</td> <td>600g (6N)</td> <td>60+1sec.</td> </tr> <tr> <td>1206</td> <td>1000g (10N)</td> <td>60+1sec.</td> </tr> <tr> <td>1210</td> <td>1000g (10N)</td> <td>60+1sec.</td> </tr> <tr> <td>1808</td> <td>1000g (10N)</td> <td>60+1sec.</td> </tr> <tr> <td>1812</td> <td>1500g (15N)</td> <td>60+1sec.</td> </tr> <tr> <td>2220</td> <td>2000g (20N)</td> <td>60+1sec.</td> </tr> </tbody> </table>  | SMD-Size | Force g (N) | Time Sec. | 0402 | 300g (3N) | 60+1sec. | 0504/0603 | 500g (5N) | 60+1sec. | 0805 | 600g (6N) | 60+1sec. | 1206 | 1000g (10N) | 60+1sec. | 1210 | 1000g (10N) | 60+1sec. | 1808 | 1000g (10N) | 60+1sec. | 1812 | 1500g (15N) | 60+1sec. | 2220 | 2000g (20N) | 60+1sec. |
| SMD-Size | Force g (N) | Time Sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0402 | 300g (3N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0504/0603 | 500g (5N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0805 | 600g (6N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1206 | 1000g (10N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1210 | 1000g (10N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1808 | 1000g (10N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1812 | 1500g (15N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2220 | 2000g (20N) | 60+1sec. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Substrate Bending Test | SPEC substrate bending test DC resistance shall meet specifications. | <p>After soldering a chip to a test substrate, bend the substrate by 3mm hold for 10s and then return.</p> <p>Soldering shall be done in accordance with the recommended PC board pattern and reflow soldering.</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Resistance to Solder Heat | No visible damage Electrical characteristics and mechanical characteristics shall be satisfied. Consult standard MIL-STD-202 METHOD 210 | <p>Solder Temp. : 265±3°C</p> <p>Immersion time : 6±1 sec</p> <p>Preheating : 100°C to 150°C, 1 minute.</p> <p>Measurement to be made after keeping at room temp for 24±2 hrs.</p> <p>Solder : Sn-3Ag-0.5Cu</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Solderability | 95% min. coverage of all metallized area Consult standard J-STD-002 | <p>Solder temp. : 240±5°C</p> <p>Immersion time : 3±1 sec</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | |

MAX ECHO 鈦鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.5版

MAX ECHO

| | | | | |
|-------------|--|--------------------------------|-------------------|-------------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 6 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |

9. RELIABILITY AND TEST CONDITIONS

9-1 HIGH TEMPERATURE RESISTANCE

a. Performance specification

- Appearance : no mechanical damage
- Inductance shall be with $\pm 20\%$ of the initial value

b. Test condition

- Temperature: $125^{\circ}\text{C} \pm 2^{\circ}\text{C}$
- Testing time : $1000 \pm 12\text{hrs}$
- Measurement : After placing at room ambient temperature for 24 hours minimum

9-2 Biased Humidity RESISTANCE

a. Performance specification

- Appearance : no mechanical damage
- Inductance shall be with $\pm 20\%$ of the initial value

b. Test condition

- Humidity: $85 \pm 5\% \text{RH}$
- Temperature: $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$
- Testing time: $1000 \pm 12\text{ hours}$
- Measurement : After placing at room ambient temperature for 24 hours minimum

9-3 TEMPERATURE CYCLE

a. Performance specification

- Appearance : no mechanical damage
- Inductance shall be with $\pm 20\%$ of the initial value

b. Test condition

- Low Temperature: $-55^{\circ}\text{C} \pm 5^{\circ}\text{C}$ kept stabilized for 30 minutes each
- High Temperature: $125^{\circ}\text{C} \pm 5^{\circ}\text{C}$ kept stabilized for 30 minutes each
- Cycle : 1000 cycles
- Measurement : After placing for 24hours minimum at room ambient temperature
- step1. $-55^{\circ}\text{C} \text{ temp} \pm 5^{\circ}\text{C}$ 30 \pm 3 minutes
step2. Room temperature 2to5 minutes
step3. $+125^{\circ}\text{C} \text{ temp} \pm 5^{\circ}\text{C}$ 30 \pm 3 minutes
step4. room temperature 2to5 minutes

9-4 VIBRATION TEST

a. Performance specification

- Appearance : no mechanical damage
- Inductance shall be with $\pm 20\%$ of the initial value

b. Test condition

- Frequency and Amplitude: 10-2000-10Hz
- Direction: X, Y, Z.
- Test duration: 4 hours for each direction, 12hours in total.

9-5 Mechanical Shock TEST

a. Performance specification

- Appearance : no mechanical damage
- Inductance shall be with $\pm 20\%$ of the initial value

b. Test condition

- peak acceleration : 100 g's
- Duration of pulse : 6 ms
- Waveform : Half-sine
- Velocity change : 12.3 ft/sec
- Direction : X , Y , Z (3axes/3 times)

9-6 Operational Life

a. Performance specification

- Appearance : no mechanical damage
- Inductance shall be with $\pm 20\%$ of the initial value

b. Test condition

- Temperature: $125^{\circ}\text{C} \pm 2^{\circ}\text{C}$
- Testing time : $1000 \pm 12\text{hrs}$
- Measurement : After placing at room ambient temperature for 24 hours minimum

9-7 Electrostatic discharge test

a. Performance specification

- Appearance : no mechanical damage
- Inductance shall be with $\pm 20\%$ of the initial value

b. Test condition

- ESD voltage: 15k volts
- Mode 1: 150 pF/330 Ohm
- Mode 2: 150 pF/2000 Ohm

9.1 REMARK

MAX ECHO could adjust reliability test method according to customer special requirement.

MAX ECHO 鈺鎧科技股份有限公司規格標準書


COMPONENT SPECIFICATION

版次：第3.5版

MAX ECHO


| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 7 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |

10-1 DIMENSIONS

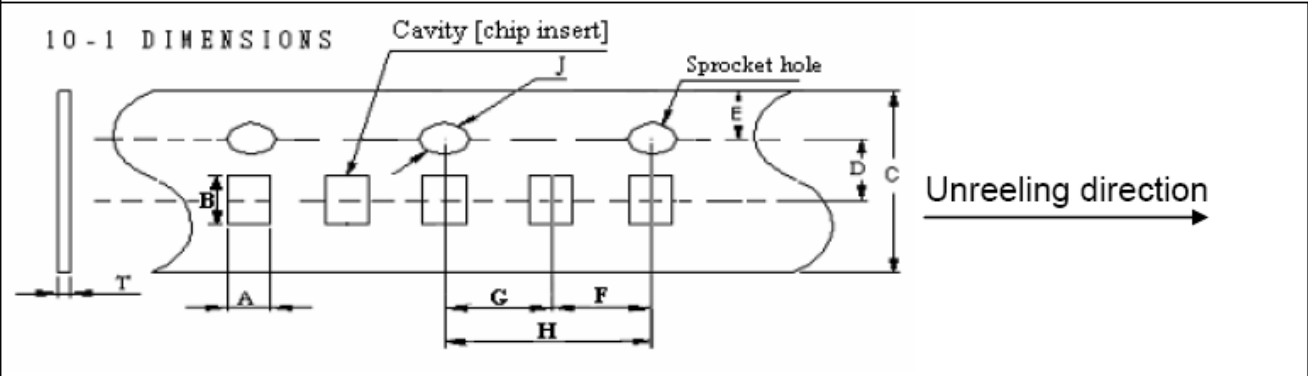

| A | B | C | D | E | F | G | H | J | T |
|-------|-------|-------|-------|-------|-------|-------|-------|-----------|------|
| 0.38 | 0.68 | 8.00 | 3.50 | 1.75 | 2.00 | 2.00 | 4.00 | 1.50 | MAX |
| ±0.04 | ±0.04 | ±0.20 | ±0.05 | ±0.05 | ±0.05 | ±0.05 | ±0.10 | +0.1 -0.0 | 1.10 |

10-2 LEADER AND TRAILER TAPE

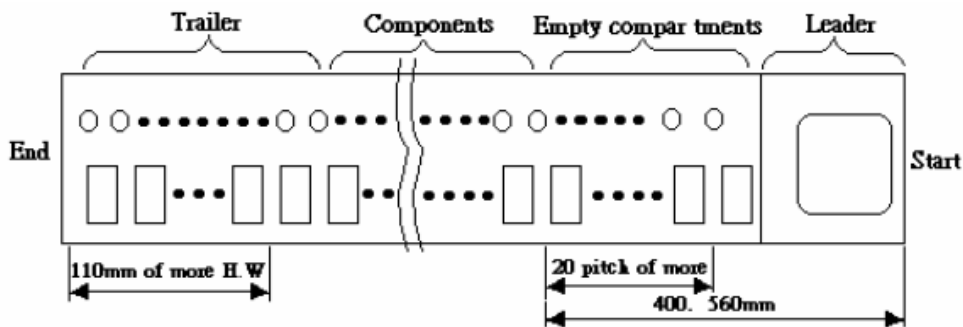

10-3 DIRECTION THE DIRECTION SHALL BE SEEN FROM THE TOP OF COVER TAPE



10-4 REELS

UNIT:mm

| | |
|----|----------|
| A | 178 ±2.0 |
| N | 50 MIN |
| W1 | 10 ±1.5 |
| W2 | 20 MAX |

PACKING QTY.
15,000 PCS REEL

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.5版


MAX ECHO

| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| Name | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 8 / 9 |
| | HBLS-060303 | SPEC# | HBLS0603-SERIES_M | |

10-5 PEELING STRENGTH OF COVER TAPE

| | |
|------------|------------|
| Cover tape | (10g~100g) |
|------------|------------|

165°~180°

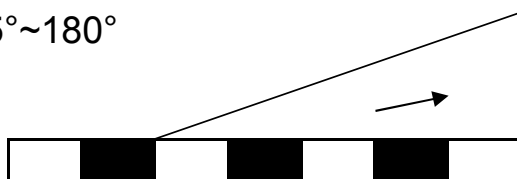

Test condition

1. peel angle : 165°~180° vs carrier tape
2. peel speed : 300mm/min

11. Packaging

1. Tape & Reel packaging in component specification 6/8
- 2) Reel and a bag of desiccant shall be packed in Nylon or plastic bag
- 3) Maximum of 5 reels shall be packaged in a inner box
- 4) Maximum of 6 inner box shall be packaged in a outer box

12. Reel Label

Producing the goods label needs to indicate (1) Pb Free (2) RoHS Compliant

MAX ECHO 鈺鎧科技股份有限公司規格標準書

COMPONENT SPECIFICATION

版次：第3.5版

MAX ECHO

| | | | | |
|------|-----------------------------------|-------------------------|-------------------|-------|
| NAME | Multilayer Ceramic Chip Inductors | COMPONENT SPECIFICATION | | 9 / 9 |
| | HBL5-060303 | SPEC# | HBL50603-SERIES_M | |

13. Storage

- 13-1 The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to high humidity. Packages must be stored at 40°C or less and 70% RH or less.
- 13-2 The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to dust or harmful gas (hydrogen chloride, sulfurous acid gas or hydrogen sulfide).
- 13-3 Packaging material may be deformed if packages are stored where they are exposed to heat or direct sun – light.
- 13-4 Minimum packages, such as polyvinyl heat – seal packages shall not be opened until just before they are used. If opened, use the reels as soon as possible.
- 13-5 Solderability specified in component specification 4/8 shall be for 12 months from the date of delivery on condition that they are stored at the environment specified clause 13-1 & 13-2.
For those parts which passed more than 12 months shall be checked solderability before it is used.

14. Quality System

- ISO/IATF16949
- IECQ QC 080000