RoHS

MATERIAL
Black phosphated weldable steel.

PIN
Ground and hardened steel.


PULLING HOOK
Zinc-plated steel.


OSCILLATING PIN AND NUTS
Zinc-plated steel.

FEATURES AND APPLICATIONS
All articulated joints are lubricated with special grease.
Tight closing of any cover.
they are suitable for use with high resistant torque thanks to high mechanical resistance of materials.
The position of the pulling hook can be adjusted in length according to the specific applications.

ACCESSORIES ON REQUEST
TRU: U-shaped pulling hooks of various dimensions (see page).





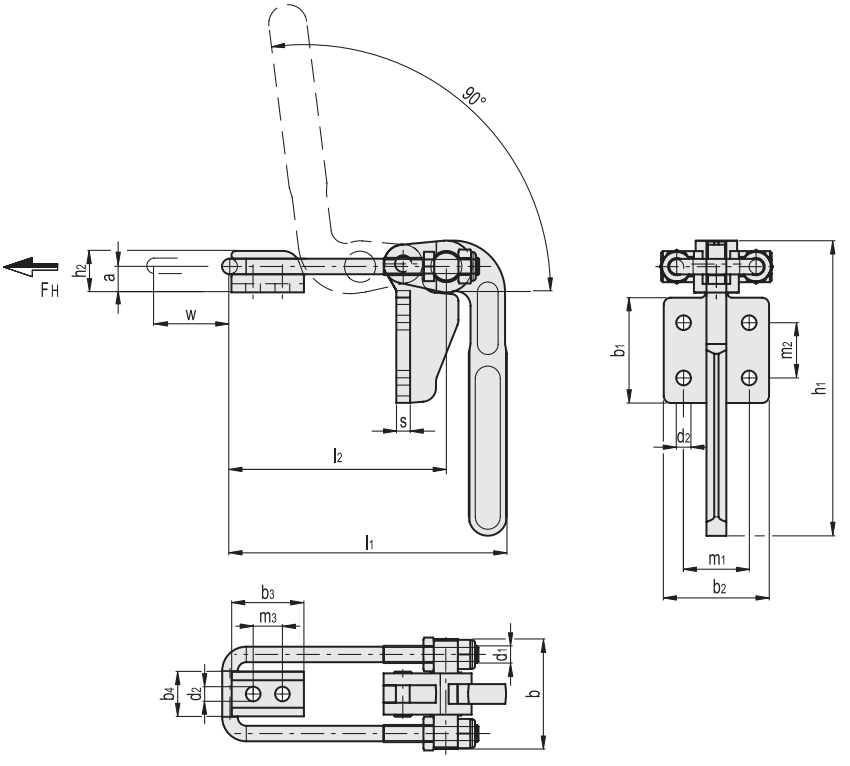

METRIC

Code	Description	a	b	b1	b2	b3	b4	d1	d2	h1	h2	l1	l2	m1	m2	m3	s	Stroke w	FH [N]*	⚖
GG.AL550	MTP-D-1400-T3	15	64	61	61	42	26	M10	8.5	171	24	159.5	125.5	38	32	17	8	50	12000	1235

* Holding force.

9/2023

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.