
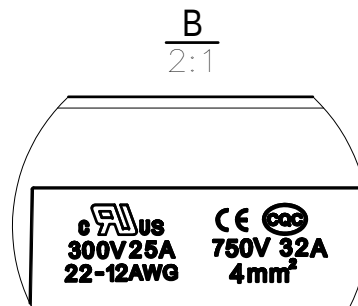



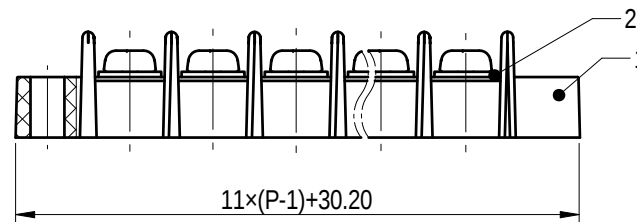


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

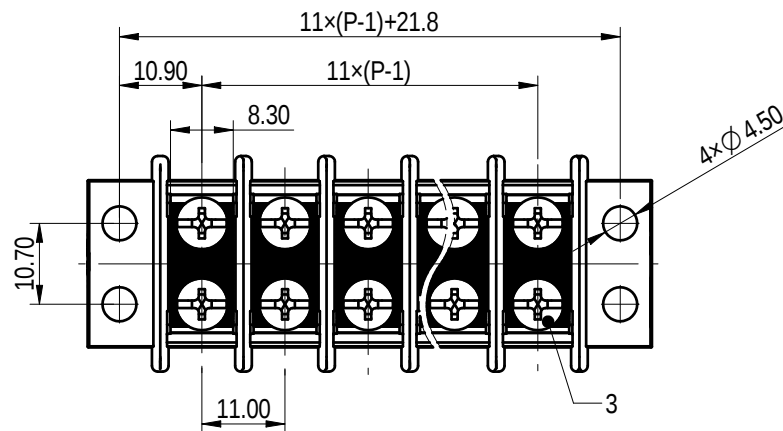

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PC	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/25	300/25	300/10
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)		750/32	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3.5, 0.8/7.08	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)		22~12	
间距/Pitch(mm)/线数范围/Poles		11.0/N=02~26P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

DEGSON		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		/ 00		MAT STATUS: 批量	
NAME		DG69-A-XXP-1Y-00L (H)			
APPD: 蓝贵凡	2023.02.06	DRAWING NO.			
CHKD: 曹利彬	2023.02.06	TYPE			
DRFT: 孙科豪	2023.02.06	DRAWING STATUS			
200126293		SCALE			
CUSTOMER DRAWING		SHEET			
已发布		1/1			

00					
REV	ECN	DESCRIPTION	DRFT	DATE	