

Actuator

704.405.010I

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.405.010I>

Your product:



704.405.010I Actuator

FRONT

Front dimension:	Ø 35 mm
Front bezel colour:	Black
Front bezel material:	Aluminium

MOUNTING

Design:	flush
----------------	-------

OPERATING-/INDICATION PART

Lever colour:	Black
Lever material:	plastic
Lever shape:	short

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

MECHANICAL CHARACTERISTIC

Mechanical lifetime:	≤2.5 Mio. cycles of operation
Switching positions:	3 positions
Switching action:	Momentary - Rest - Momentary
Weight:	0.056 kg
Switching angle:	42° left / 42° right

AMBIENT CONDITION

Operating temperature: - 40 °C ... + 55 °C

Storage temperature: - 40 °C ... + 85 °C

IP Protection: IP65 front side


OTHER

Hints: Max. 3 switching elements can be clipped on


Short Description: Actuator, Ø 35 mm, optional illuminative, Black, short, Black, Aluminium, anodised, Momentary - Rest - Momentary

max. number of switching elements: 3


Mounting cut-outs:

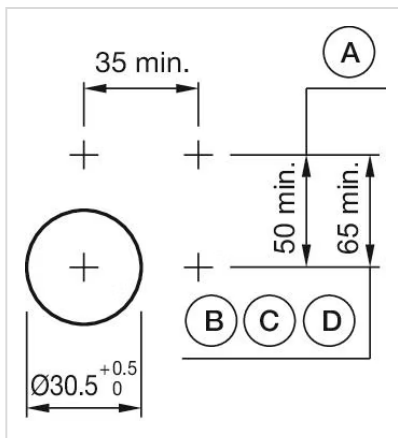

Dimension drawings:

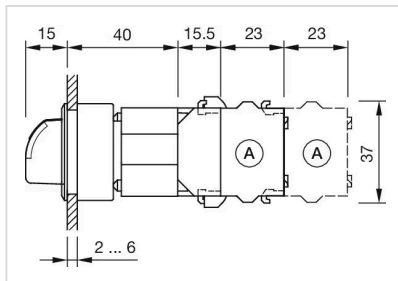

Wiring diagrams:

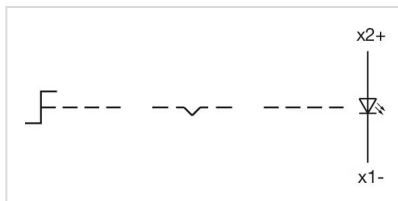

Switching positions:

