

# Actuator

704.403.010I

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/704.403.010I>

Your product:

---



## 704.403.010I Actuator

### FRONT

<b>Front bezel colour:</b>	Black
<b>Front dimension:</b>	Ø 35 mm
<b>Front bezel material:</b>	Aluminium

### MOUNTING

<b>Design:</b>	flush
----------------	-------

### OPERATING-/INDICATION PART

<b>Lever shape:</b>	short
<b>Lever colour:</b>	Black
<b>Lever material:</b>	plastic

### ELECTRICAL CHARACTERISTICS

<b>Standards:</b>	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

### MECHANICAL CHARACTERISTIC

<b>Weight:</b>	0.056 kg
<b>Switching angle:</b>	42° left / 42° right
<b>Switching positions:</b>	3 positions
<b>Mechanical lifetime:</b>	≤2.5 Mio. cycles of operation
<b>Switching action:</b>	Maintained - Rest - Maintained

**AMBIENT CONDITION**

**Operating temperature:** - 40 °C ... + 55 °C

**IP Protection:** IP65 front side

**Storage temperature:** - 40 °C ... + 85 °C


**OTHER**

**Short Description:** Actuator, Ø 35 mm, optional illuminative, Black, short, Black, Aluminium, anodised, Maintained - Rest - Maintained


**max. number of switching elements:** 3

**Hints:** Max. 3 switching elements can be clipped on


**Mounting cut-outs:**

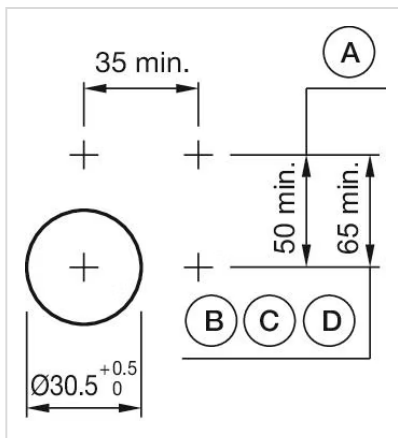

**Dimension drawings:**

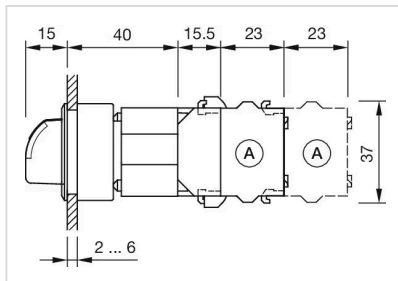

**Wiring diagrams:**

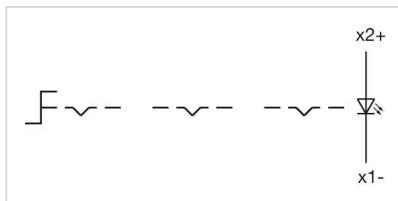

**Switching positions:**

