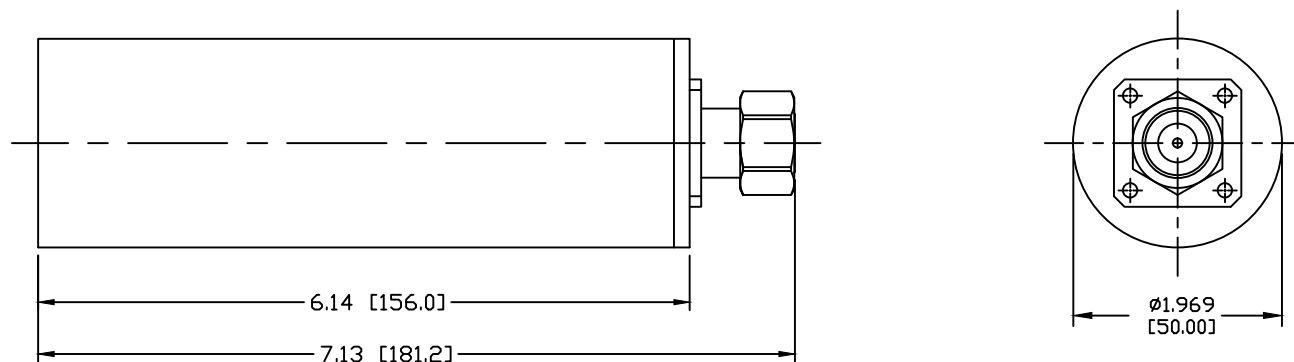


PART NO.

RFLOAD-43M20

REV	DESCRIPTION	DWN	DATE	APPROVED
B	UPDATED SPECS	CZS	12/19/19	JDMc

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 350-2700MHz
 3RD ORDER IM: -160dBc (RELATIVE TO CARRIER)
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS
 VSWR: $\leq 1.3:1$ @ 350-2700MHz
 AVERAGE POWER: 20W @ 350-2700MHz
 APPLICATION: INDOOR
 TEMPERATURE RANGE: -30°C ~ +65°C
 COLOR: BLACK

NOTES:

CONNECTOR WILL HAVE PROTECTIVE CAP ON

CUSTOMER OUTLINE DRAWING						7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340	
ALL DIMENSIONS ARE REFERENCE ONLY						DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		20 WATT TERMINATION LOAD 4.3-10 MALE - 350-2700 MHz			
DRAWN C. ZUNIGA CHECKED	12/19/19	SIZE A	CABLE GROUP N/A	DWG NO. RFLOAD-43M20	REVISION B		
ORJ DRAWN C. ZUNIGA	05/23/18	SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1			