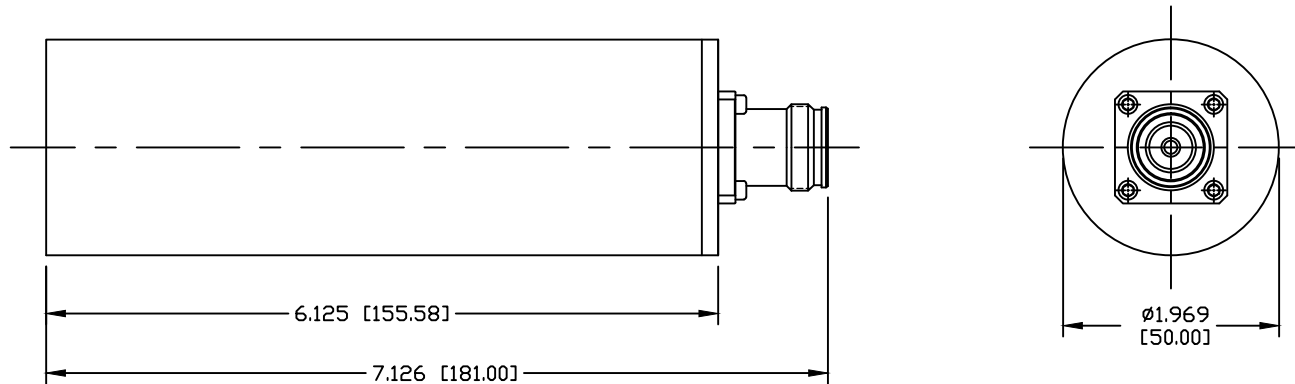


PART NO.

RFLOAD-43F30

REV	DESCRIPTION	DWN	DATE	APPROVED
A	UPDATED SPECS	CZS	11/1/19	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 350–2700MHz
 3rd ORDER IM: –160dBc (RELATIVE TO CARRIER)
 3rd ORDER IM TEST METHOD: 2x43dBm CARRIERS
 VSWR: $\leq 1.3:1$ @ 350–600MHz
 VSWR: $\leq 1.2:1$ @ 600–2700MHz
 AVERAGE POWER: 30W @ 350–2700MHz
 APPLICATION: INDOOR
 TEMPERATURE RANGE: –30°C ~ +65°C
 COLOR: BLACK

NOTES:

CONNECTOR WILL HAVE PROTECTIVE CAP ON

CUSTOMER
OUTLINE DRAWING

ALL DIMENSIONS
ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN C. ZUNIGA	11/1/19
CHECKED	
ORJ DRAWN C. ZUNIGA	01/21/19

RoHS
COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES, ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

30 WATT TERMINATION LOAD
4.3-10 FEMALE - 350-2700 MHz

SIZE	CABLE GROUP	DWG NO.	REVISION
A		RFLOAD-43F30	A
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	