


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		INITIAL	KYLE	11/19/2018
X2		ADD 800MM OPTION -06, REMOVE SPECIFIED PCB MATERIAL, CHANGE LABEL S/N FORMAT	TF	12/15/2021
X3		CHANGED THE SIZE OF THE HOUSING	ZAKK	7/18/2022
X4		ADDED NEW LENGTHS	ZAKK	9/9/2022

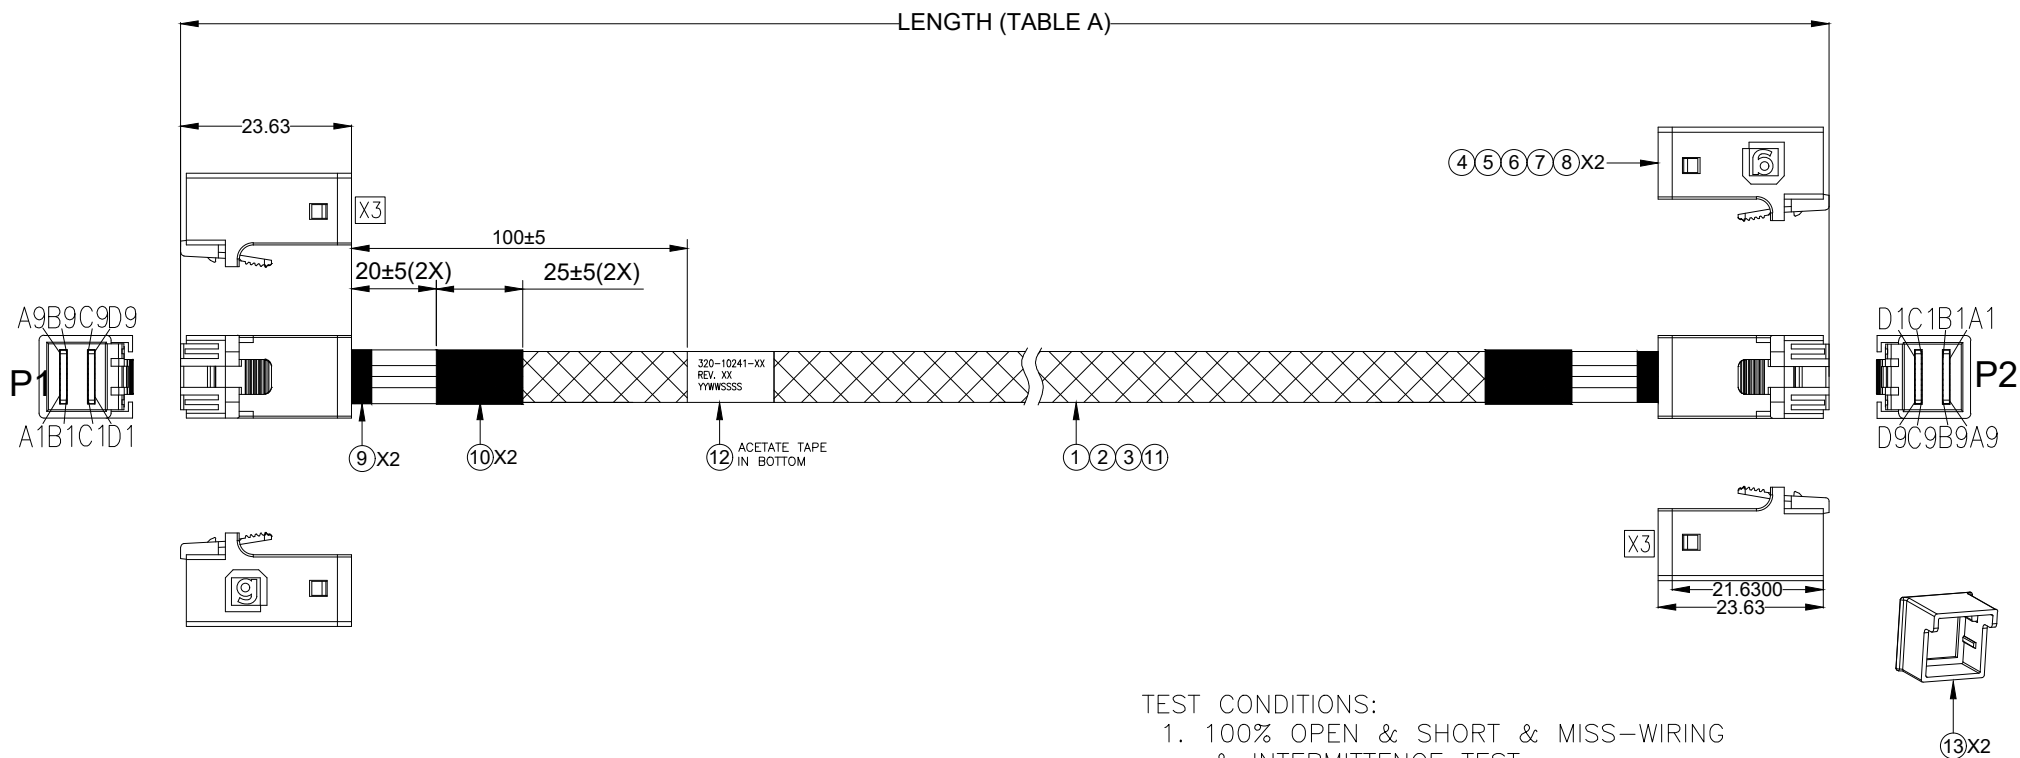


TEST CONDITIONS:

1. 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
2. CONDUCTIVE RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 10 MΩ
4. HI-POT TEST: 300VDC FOR 10ms.
5. THIS PRODUCT MEETS SAS 3.0


11	HD SAS INT. DUST COVER, PE	2
10	LABEL FOR SFF-8643, 60*30MM(REF)	1
9	PLASTIC BRAID SLEEVE, Ø8.0MM, PET, BLACK	A/R
8	ACETATE TAPE, 25MM, BLACK	A/R
7	ACETATE TAPE, 10MM, BLACK	A/R
6	HOUSING FOR SFF-8643, PC-940, BLACK,W/G LOGO	2
5	INNER MOLDING FOR SFF-8643, BLACK	2
4	PCB FOR INT. MINI SAS HD, AU30u", C&D SIDE	2
3	PCB FOR INT. MINI SAS HD, AU30u", A&B SIDE	2
2	FLAT CABLE, 30AWG, PVC	A/R
1	SAS CABLE 30AWG, FOIL COLOR SILVER	A/R
S/N	DESCRIPTION	Q'TY

GENERAL TOLERANCE X± 0.50 .X± 0.20 .XX± 0.10 .XXX± 0.05	ANGLE TOLERANCE X°± 5.0° .X°± 3.0° .XX°± 2.0° .XXX°± 1.0°	DRAWN	DATE		
MATL	FINISH	CHECKED	DATE		TITLE. INTERNAL MINI SAS HD 4i STR TO HD 4i STR, 100 OHM, 12G
SCALE N/A	UNIT mm	APPROVED	DATE		PART NUMBER. 320-10241-XX
SHEET 1 OF 2					DRAWING NO. 320-10241
				SIZE A4	
				REV. X4	

WIRING TABLE

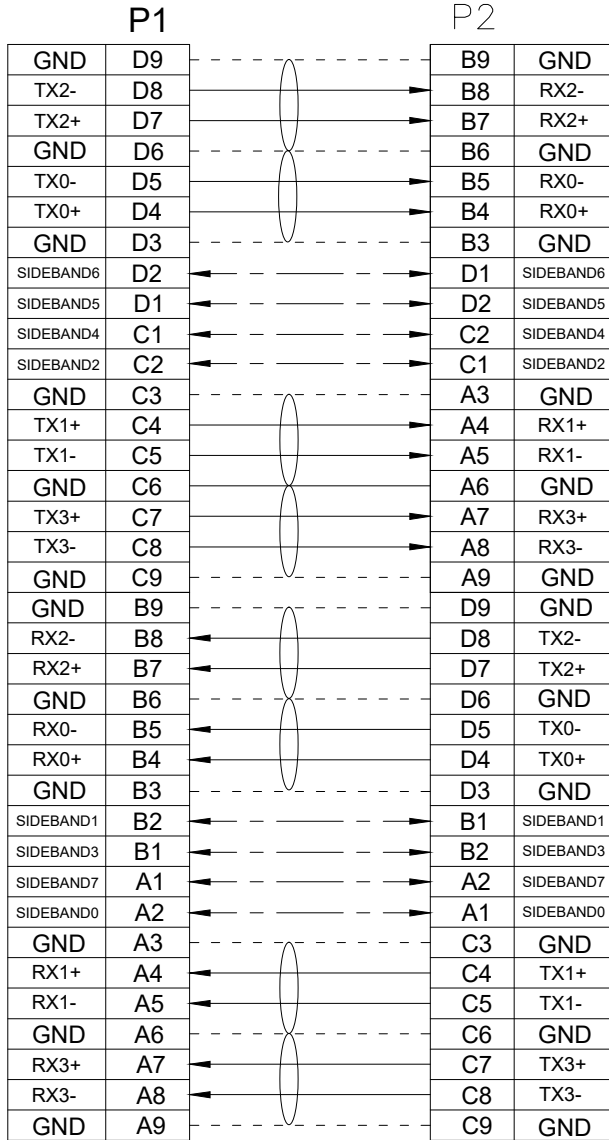


LABEL INFORMATION

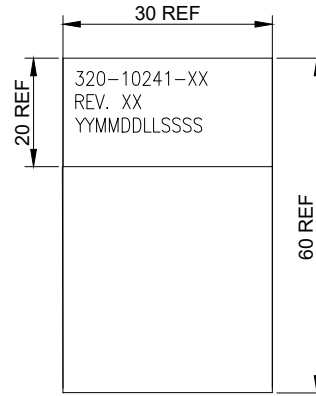

X2

FONT: ARIAL
HEIGHT: 2.0mm Min
LINE SPACING: 1.0MM
YYMMDDLLSSSS: GENESIS PRODUCT SERIAL NUMBER
PRINT BARCODE UNDER S/N

PART NUMBER	AWG	LENGTH mm
320-10241-01	30	150±10
320-10241-02	30	300±10
320-10241-03	30	500±15
320-10241-04	30	700±15
320-10241-05	30	1000±20
X2 320-10241-06	30	800±15
X4 320-10241-07	30	450±10

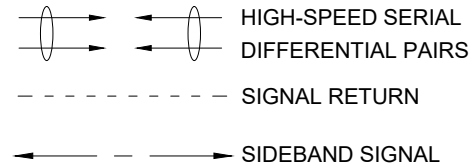

GENERAL TOLERANCE X ± 0.50 .X ± 0.20 .XX ± 0.10 .XXX ± 0.05	ANGLE TOLERANCE X° ± 5.0° .X° ± 3.0° .XX° ± 2.0° .XXX° ± 1.0°	DRAWN DATE	
MATL	FINISH	CHECKED DATE	
SCALE N/A	UNIT mm	APPROVED DATE	PART NUMBER: 320-10241-XX
SHEET 2 OF 2			DRAWING NO. 320-10241
			SIZE A4 REV. X4