
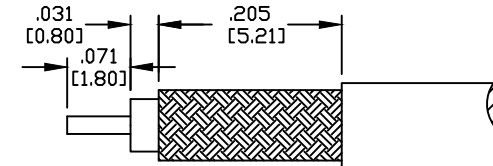
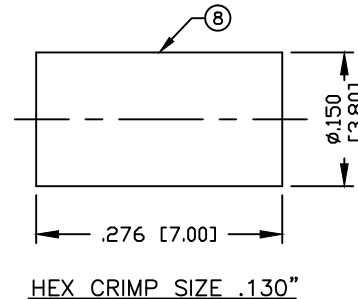


PART NO.

RMX-9010-1B1

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ADDED ITEM #6	CZS	06/28/19	JDMc

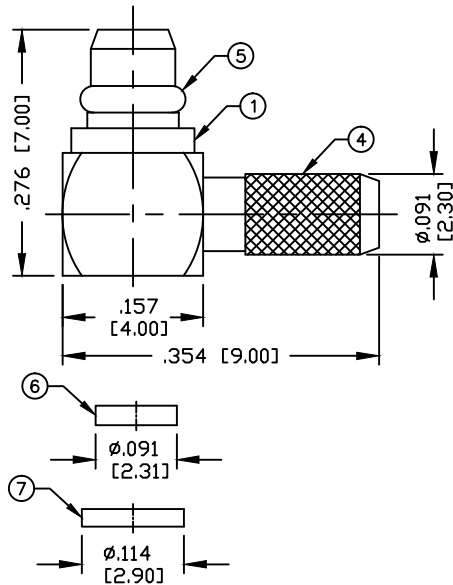

RECOMMENDED
CABLE STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 VSWR: 1.3 MAX
 INSERTION LOSS: 0.3 dB MAX @ 1GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS rms MAX
 INSULATION RESISTANCE: 1K M Ohms
 WORKING VOLTAGE: 170 Vrms AT SEA LEVEL
 ENGAGEMENT FORCE: 8 lbs. MAX.
 DISENGAGEMENT FORCE: 1.4 lbs. MIN.
 FOR RG-316/U DOUBLE SHIELD CABLE

8	FERRULE	1	COPPER	GOLD
7	END CAP	1	BRASS	GOLD
6	INSULATOR DISK	1	PTFE	---
5	RETAINING RING	1	Be.Cu.	GOLD
4	FERRULE STUD	1	BRASS	GOLD
3	PIN	1	BRASS	GOLD
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	GOLD
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN C. ZUNIGA	06/28/19
CHECKED	
ORJ DRAWN C. ZUNIGA	4/1/99

RoHS
COMPLIANT

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

RFINDUSTRIES.COM
7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

MMCX CRIMP PLUG
RIGHT ANGLE

CABLE GROUP B1	DWG # RMX-9010-1B1	REVISION A
FORMAT A	SCALE NTS	CONTROL # 000000
		SHEET 1 OF 1