Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

17-020350



https://digikey.eao.com/p/17-020350

Your product:



17-020350
Actuator

FRONT

Front dimension:	Ø 7 mm
Reflector:	Metal, polished chromium-plated, domed
Front form:	round

MOUNTING

Mounting cut-out:	Ø 6 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Red

ELECTRICAL CHARACTERISTICS

Operation current:	15 mA ±15 %
Lumi. Intensity:	8 mcd
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operating voltage:	24 V AC/DC ±10 %

MECHANICAL CHARATERISTIC

Terminal:	Plug-in terminal, 2 x 0.5 mm
Weight:	0.003 kg
Tightening torque:	Fixing nut max. 0.2 Nm

AMBIENT CONDITION

Operating temperature: – 20 °C ... + 60 °C

Storage temperature: – 25 °C ... + 80 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

Approbations: UL


OTHER

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-),IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket.,The plastic is limited resistant to chemicals.


Kind of illlumination: Single-LED

Short Description: Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Red

Wiring diagrams:

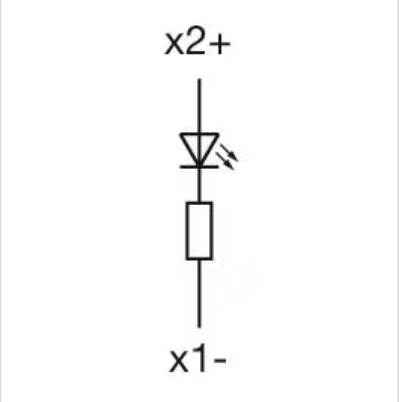

Mounting cut-outs:

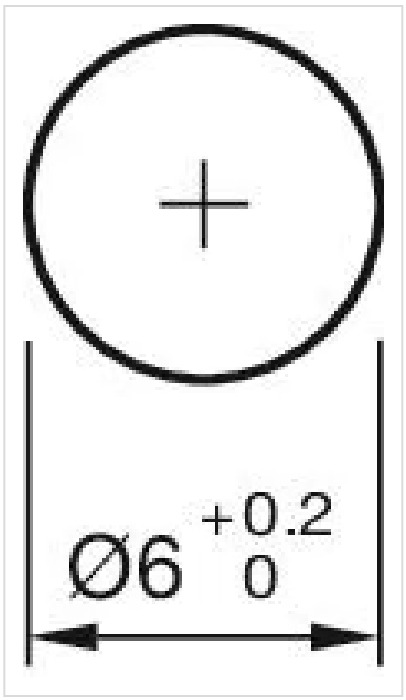

Dimension drawings:

