

Actuator

17-020351

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-020351>

Your product:



17-020351 Actuator

FRONT

Front dimension:	Ø 7 mm
Reflector:	Metal, polished chromium-plated, domed
Front form:	round

MOUNTING

Mounting cut-out:	Ø 6 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Green
----------------------	-------

ELECTRICAL CHARACTERISTICS

Lumi. Intensity:	6 mcd
Operating voltage:	24 V AC/DC ± 10 %
Operation current:	15 mA ± 15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARACTERISTIC

Weight:	0.003 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2 x 0.5 mm

AMBIENT CONDITION

Storage temperature: – 25 °C ... + 80 °C

Operating temperature: – 20 °C ... + 60 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

Approbations: UL


OTHER

Short Description: Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Green


Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Kind of illumination: Single-LED

Dimension drawings:

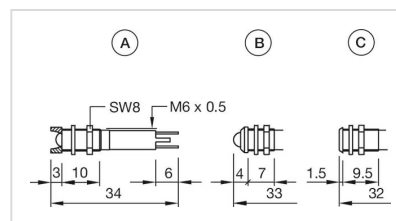

Mounting cut-outs:

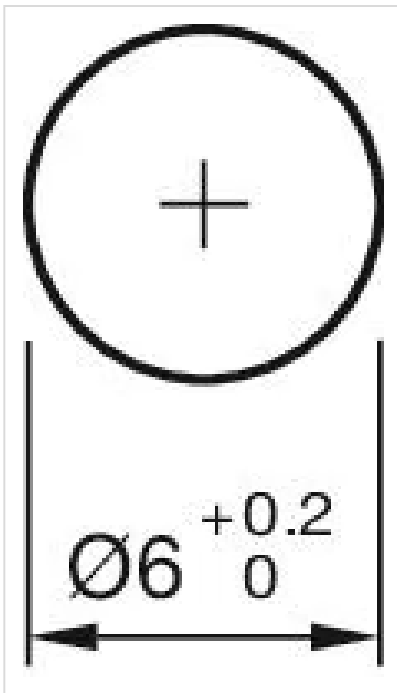

Wiring diagrams:

