Your Expert Partner for **Human Machine Interfaces**

Single-LED

Distribution by DigiKey

10-2H13.3162Q



https://digikey.eao.com/p/10-2H13.3162Q

Your product:



10-2H13.3162Q
Single-LED

OPERATING-/INDICATION PART

Illumination colour: Red

ELECTRICAL CHARACTERISTICS

Lumi. Intensity: 300 - 440 mcd

Operation current: 13 - 19,00 mA ±15 %

Operating voltage: 24 - 30,00 V DC +10%

MECHANICAL CHARATERISTIC

Weight: 0.002 kg


OTHER

Hints: Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the
LED,Electrical and optical data are measured at 25 °C,The specified 12, 24, 28, 48 VAC/DC versions are built with a bridge rectifier

Short Description: Single-LED, BA9s, Red, 24 - 30,00 V DC +10%

Kind of illlumination: Single-LED

Wiring diagrams:

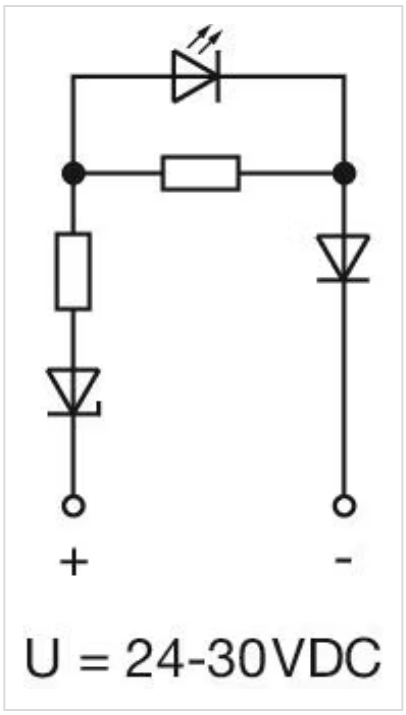

Dimension drawings:

