Your Expert Partner for **Human Machine Interfaces**

Single-LED super bright

Distribution by DigiKey

10-2413.1134R



https://digikey.eao.com/p/10-2413.1134R

Your product:



10-2413.1134R
Single-LED super bright

OPERATING-/INDICATION PART

Illumination colour: Yellow

ELECTRICAL CHARACTERISTICS

Lumi. Intensity: 4200 mcd

Operation current: 14 mA ±15 %

Operating voltage: 28 V AC/DC +10%

MECHANICAL CHARATERISTIC

Weight: 0.002 kg


OTHER

Kind of illlumination: Single_LED super bright

Short Description: Single-LED super bright, BA9s, Yellow, 28 V AC/DC +10%

Hints: The specified 12, 24, 28, 48 VAC/DC versions are built with a bridge rectifier,Electrical and optical data are measured at 25 °C,Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams:

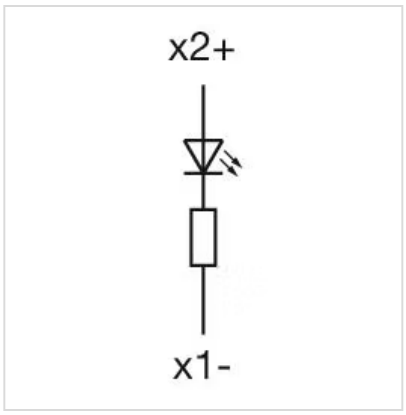

Dimension drawings:

