Your Expert Partner for **Human Machine Interfaces**

Single-LED

Distribution by DigiKey

10-4H21.1032P



https://digikey.eao.com/p/10-4H21.1032P

Your product:



10-4H21.1032P
Single-LED

OPERATING-/INDICATION PART

Illumination colour: Red

ELECTRICAL CHARACTERISTICS

Operating voltage: 72 V AC/DC

Lumi. Intensity: 4 x 128 mcd

Operation current: 2,2 mA -30%/+25%

MECHANICAL CHARATERISTIC

Weight: 0.002 kg


OTHER

Kind of illlumination: Multi-LED EN 50155

Hints: A suitable LED remover Part No. 700.006.0,The luminous intensity stated is for when used with DC,Electrical and optical data are measured at 25 °C,The specified 72 and 110 VAC/VDC versions are built with a bridge rectifier,The specifie case one LED fails, the other pair of still functioning LED›s is working. The light output then is half in order to indicate the malfunction and shows this way the need for replacement,Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Short Description: Single-LED, BA9s, Red, 72 V AC/DC

Wiring diagrams:

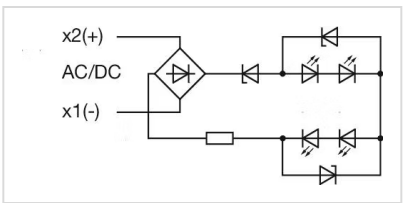

Dimension drawings:

