Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

17-570231



https://digikey.eao.com/p/17-570231

Your product:



17-570231
Actuator

FRONT

Front form:	round
Reflector:	Metal, polished chromium-plated
Front dimension:	Ø 25 mm

MOUNTING

Mounting cut-out:	Ø 22.3 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Green

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operation current:	4 mA ±15 %
Lumi. Intensity:	20 mcd
Operating voltage:	230 V AC ±10 %

MECHANICAL CHARATERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.044 kg
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

Operating temperature: – 20 °C ... + 60 °C

Storage temperature: – 25 °C ... + 80 °C

CERTIFICATE

Approbations: UL

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Kind of illlumination: Single-LED


Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-),IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket.,The plastic is limited resistant to chemicals.

Short Description: Actuator, Ø 22.3 mm, Ø 25 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green


Wiring diagrams:

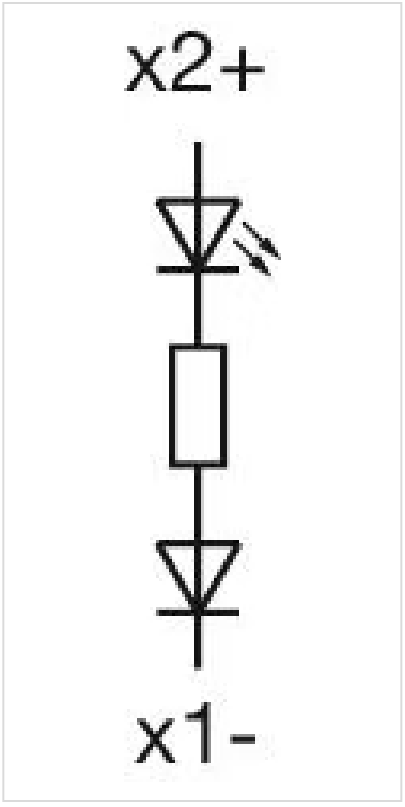

Dimension drawings:

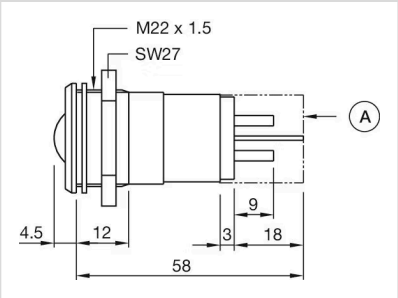

Mounting cut-outs:

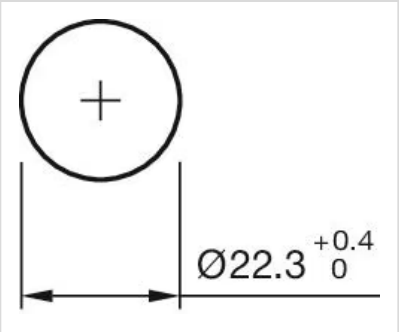

Component layouts:

