

Actuator

17-540354

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-540354>

Your product:



17-540354 Actuator

FRONT

Front dimension:	Ø 25 mm
Reflector:	Metal, polished chromium-plated
Front form:	round

MOUNTING

Mounting cut-out:	Ø 22.3 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Red / Yellow / Green
-----------------------------	----------------------

ELECTRICAL CHARACTERISTICS

Operation current:	24 - 50,00 mA ±15 %
Lumi. Intensity:	51/92/120 mcd
Operating voltage:	24 V DC ±10 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARATERISTIC

Weight:	0.042 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

Operating temperature:	- 20 °C ... + 60 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	- 25 °C ... + 80 °C

CERTIFICATE

Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)
Approbations:	UL


OTHER

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.


Kind of illumination: Tri-colour-LED

Short Description: Actuator, Ø 22.3 mm, Ø 25 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red / Yellow / Green


Wiring diagrams:

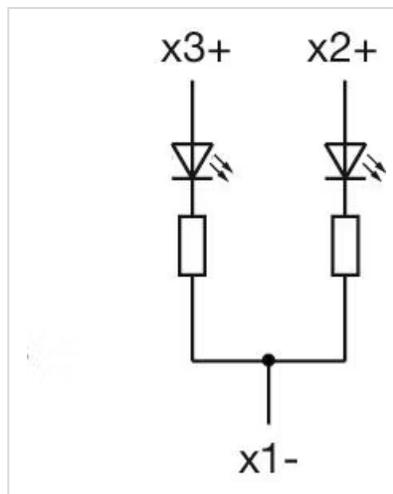

Dimension drawings:

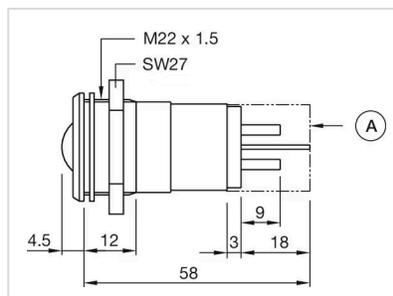

Mounting cut-outs:

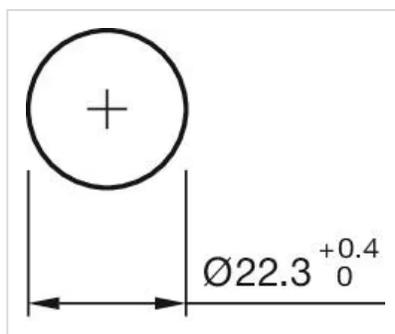

Component layouts:

