Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

704.095.010I



https://digikey.eao.com/p/704.095.010I

Your product:



704.095.010I
Actuator

FRONT

Front bezel material:	Aluminium
Front dimension:	Ø 35 mm
Front bezel colour:	Black

MOUNTING

Design:	flush

OPERATING-/INDICATION PART

Lever colour:	Black
Lever material:	plastic
Lever shape:	long

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the “Standards for low-voltage switching devices” DIN EN 60947-1

MECHANICAL CHARATERISTIC

Mechanical lifetime:	≤2.5 Mio. cycles of operation
Switching angle:	42° left / 42° right
Weight:	0.056 kg
Switching action:	Momentary - Rest - Momentary
Switching positions:	3 positions


AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C


OTHER

Short Description:	Actuator, Ø 35 mm, optional illuminative, Black, long, Black, Aluminium, anodised, Momentary - Rest - Momentary
max. number of switching elements:	3
Hints:	Max. 3 switching elements can be clipped on


Wiring diagrams:

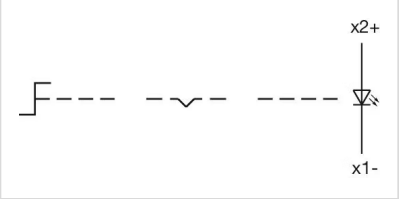


Mounting cut-outs:

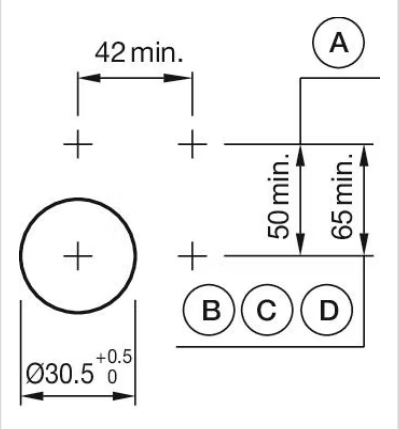

Dimension drawings:

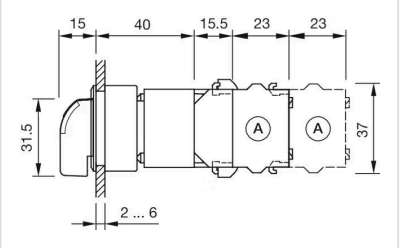

Switching positions:

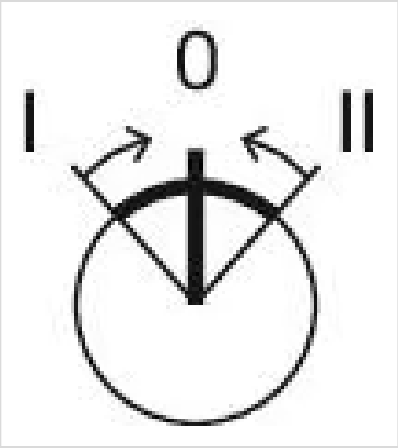
0
I
II