

Actuator

17-
411231Z

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-411231Z>

Your product:



17-411231Z Actuator

FRONT

Reflector:	Plastic, Black
Front form:	round
Front dimension:	Ø 18,3 mm

MOUNTING

Design:	raised
Mounting cut-out:	Ø 16.2 mm

OPERATING-/INDICATION PART

Illumination colour:	Green
----------------------	-------

ELECTRICAL CHARACTERISTICS

Operation current:	3 mA ±15 %
Operating voltage:	230 V AC ±10 %
Lumi. Intensity:	120 mcd
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARATERISTIC

Weight:	0.008 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

Operating temperature:	– 20 °C ... + 60 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C

CERTIFICATE

Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)
Approbations:	UL


OTHER

Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
---------------	--


Kind of illumination:	Single-LED
------------------------------	------------

Short Description:	Actuator, Ø 16.2 mm, Ø 18,3 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green
---------------------------	--

Dimension drawings:

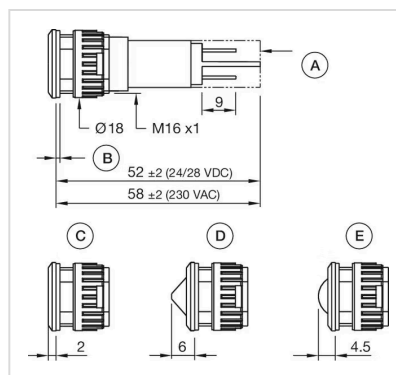

Wiring diagrams:

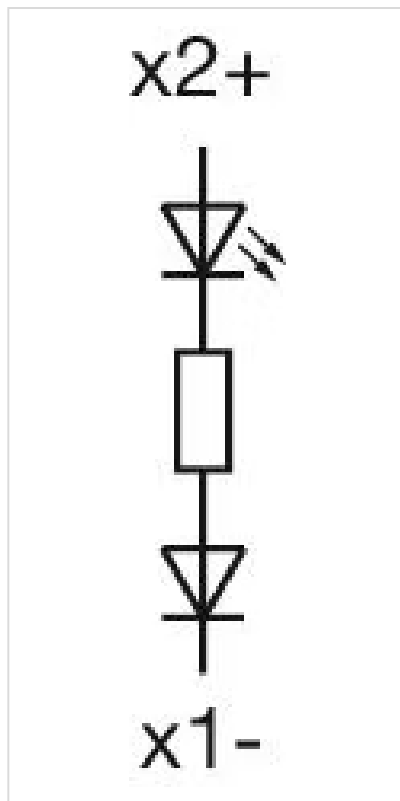

Mounting cut-outs:

