

Actuator

17-040351

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-040351>

Your product:



17-040351 Actuator

FRONT

Front dimension:	Ø 9,5 mm
Front form:	round
Reflector:	Metal, polished chromium-plated, domed

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Green
-----------------------------	-------

ELECTRICAL CHARACTERISTICS

Operation current:	20 mA ±15 %
Operating voltage:	24 V DC
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	32 mcd

MECHANICAL CHARACTERISTIC

Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Weight:	0.005 kg
Tightening torque:	Fixing nut max. 0.2 Nm

AMBIENT CONDITION

Operating temperature:	- 20 °C ... + 60 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	- 25 °C ... + 80 °C


CERTIFICATE

Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Kind of illumination:	Single-LED
Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Mounting cut-outs:

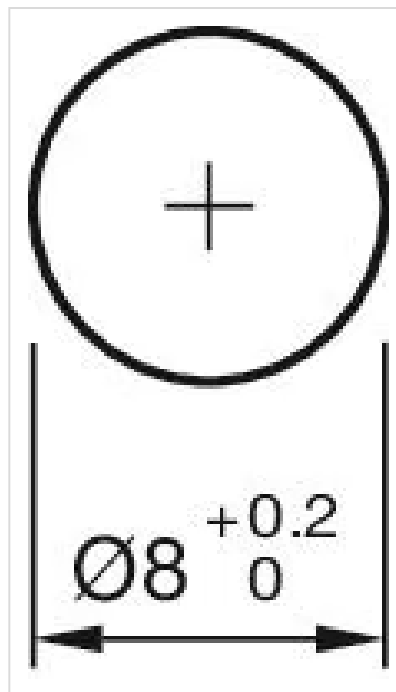

Wiring diagrams:

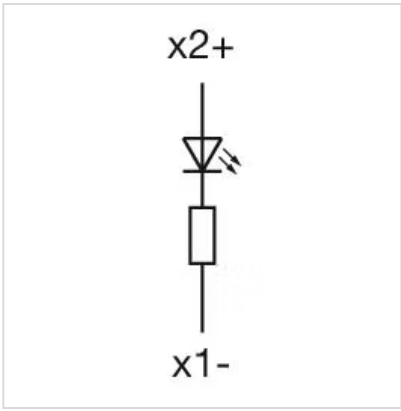

Dimension drawings:

