

Actuator

17-210350

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-210350>

Your product:



17-210350 Actuator

FRONT

| | |
|-------------------------|---------------------------------|
| Front form: | round |
| Reflector: | Metal, polished chromium-plated |
| Front dimension: | Ø 16 mm |

MOUNTING

| | |
|--------------------------|---------|
| Mounting cut-out: | Ø 14 mm |
| Design: | raised |

OPERATING-/INDICATION PART

| | |
|-----------------------------|-----|
| Illumination colour: | Red |
|-----------------------------|-----|

ELECTRICAL CHARACTERISTICS

| | |
|---------------------------|---|
| Operation current: | 20 mA ±15 % |
| Polarity: | Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector |
| Operating voltage: | 24 V DC ±10 % |
| Lumi. Intensity: | 150 mcd |

MECHANICAL CHARACTERISTIC

| | |
|---------------------------|--------------------------------|
| Weight: | 0.014 kg |
| Tightening torque: | Fixing nut max. 0.2 Nm |
| Terminal: | Plug-in terminal, 2.8 x 0.8 mm |

AMBIENT CONDITION

| | |
|-------------------------------|--|
| Storage temperature: | - 25 °C ... + 80 °C |
| Operating temperature: | - 20 °C ... + 60 °C |
| IP Protection: | IP40 front side, IP65 front side, according to IEC 60529 |


CERTIFICATE

| | |
|----------------------|---|
| Approbations: | UL |
| Conformities: | 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC) |


OTHER

| | |
|------------------------------|--|
| Kind of illumination: | Single-LED |
| Short Description: | Actuator, Ø 14 mm, Ø 16 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red |
| Hints: | Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals. |

Wiring diagrams:

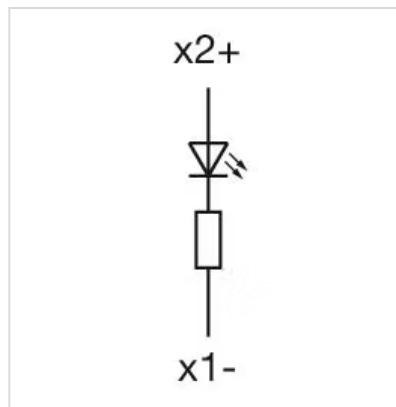

Mounting cut-outs:

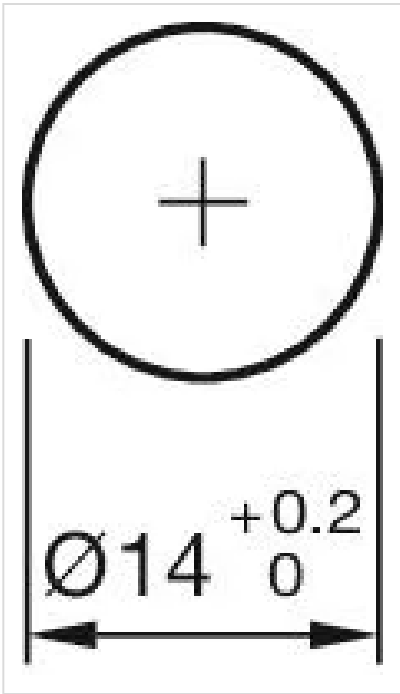

Dimension drawings:

