Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

51-
715.0292



https://digikey.eao.com/p/51-715.0292

Your product:



51-715.0292
Actuator

FRONT

Front bezel colour:	Black
Front bezel material:	Plastic
Front dimension:	24 mm x 18 mm

MOUNTING

Design:	raised

OPERATING-/INDICATION PART

Lens illumination:	illuminative

ELECTRICAL CHARACTERISTICS

Protection class:	II
Rated Operational Voltage Ue:	250 VAC/DC according to EN IEC 60947-1
Electric strength:	2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15
Standards:	According to EN/IEC 61058-1
Thermal current Ith:	5 A, according to EN / IEC 60947-5-1 The maximum current in continuous operation and at ambient temperature not exceeding the quoted maximum values.
Switching voltage and switching current:	250 VAC, 5 A (ohmic) 250 VAC, 2 A (inductive, cos(phi) = 0.7) 125 VAC, 3 A (inductive, cos(phi) = 0.7) 220 VDC, 0.1 A (inductive, L:R = 30 ms) 110 VDC, 0.2 A (inductive, L:R = 30 ms) 60 VDC, 0.7 A (inductive, L:R = 30 ms) 24 VDC, 2 A (inductive, L:R = 30 ms)
Electrical lifetime:	50 000 cycles of operation

Contacts:	2 NC / 2 NO

MECHANICAL CHARATERISTIC

Wire cross section:	Snap-action switching element with tinned soldering terminals at the sides Max. wire diameter 2 wires à 1.2 mm Max. wire cross-section of stranded cable 1 x 1 mm^2
Switching system:	Snap-action switching element
Operating force:	1,8 ... 6 N, depending on the number of switching elements
Switching action:	Maintained
Switching system:	Self-cleaning, double-break snap action switching system, 1 normally closed and 1 normally open contact per element.
Operating Travel:	3 mm
Tightening torque:	Fixing nut max. 0.5 Nm
Terminal:	Universal soldering terminal
Mechanical lifetime:	1 Mio. cycles of operation
Contact material:	Gold
Weight:	0.01 kg

AMBIENT CONDITION

IP front protection:	IP65, according to DIN EN 60529
Storage temperature:	– 40 °C ... + 85 °C
Operating temperature:	– 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely
Vibration resistance:	10 g at 10 Hz...1500 Hz, amplitude 0.75 mm (Sinusoidal), according to DIN EN 60512-4-4, DIN EN 60068-2-6
Climate resistance:	Standard condition, as per DIN EN 60068-2-30 Changing condition, as per DIN EN 60068-2-14
Shock resistance:	15 g for 11 ms, as per DIN / EN 60512-4-3, DIN / EN 60068-2-27 (Single impacts, semi-sinusoidal)

CERTIFICATE

Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 30 / EU (EMC), 2014 / 35 / EU (LVD)
Approbations:	CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL


OTHER

Short Description:	Actuator, 24 mm x 18 mm, illuminative, Black, Plastic, 2 NC / 2 NO, Maintained,


Universal soldering terminal, IP65, according to DIN EN 60529

Internal size:	21,5 mm x 15,3 mm
max. number of switching elements:	4
Housing colour:	Black

Wiring diagrams:

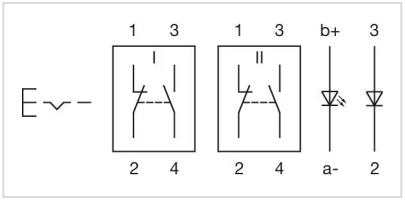

Mounting cut-outs:

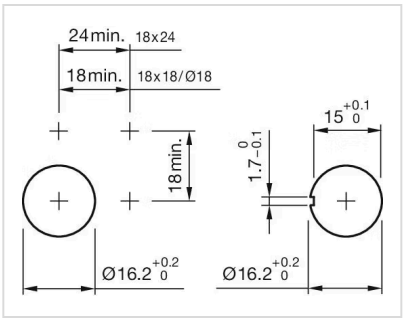

Dimension drawings:

