

Actuator

17-120354

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-120354>

Your product:



17-120354 Actuator

FRONT

Front form:	round
Front dimension:	Ø 9,5 mm
Reflector:	Metal, polished chromium-plated, domed

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Red / Green
----------------------	-------------

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operation current:	22 mA ±15 %
Lumi. Intensity:	30/11 mcd
Operating voltage:	24 V DC

MECHANICAL CHARACTERISTIC

Weight:	0.005 kg
Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2 x 0.5 mm

AMBIENT CONDITION

Operating temperature: – 20 °C ... + 60 °C

Storage temperature: – 25 °C ... + 80 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

Approbations: UL


OTHER

Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.


Short Description: Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2 x 0.5 mm, Red / Green

Kind of illumination: Bi-colour-LED


Dimension drawings:

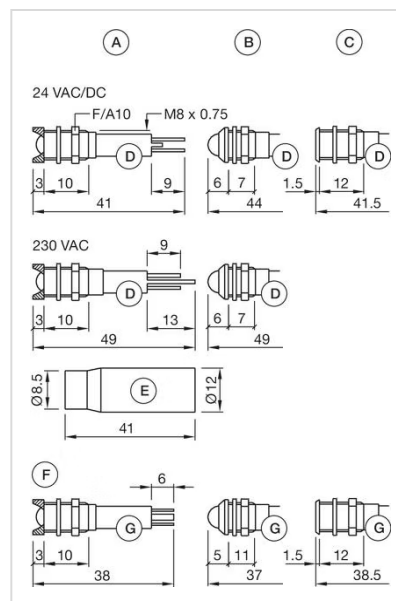

Component layouts:

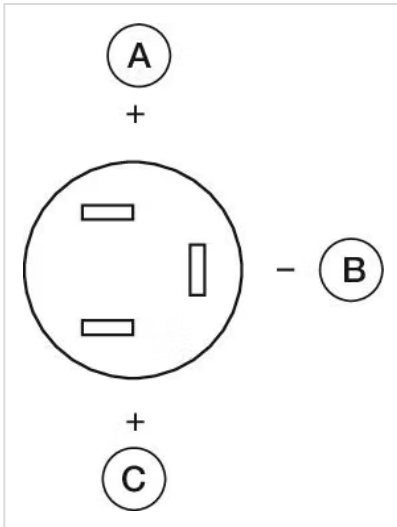

Mounting cut-outs:

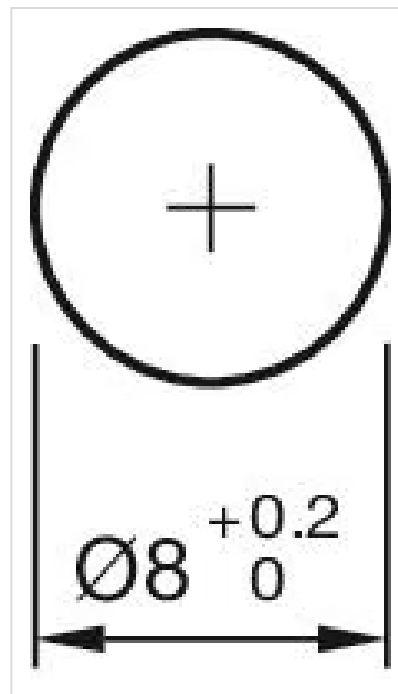

Wiring diagrams:

