Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

14-
136.025K2



https://digikey.eao.com/p/14-136.025K2

Your product:



14-136.025K2
Actuator

FRONT

Front bezel colour:	Nature
Front bezel material:	Aluminium

ELECTRICAL CHARACTERISTICS

Rated Operational Voltage Ue:	250 VAC/DC according to EN IEC 61058-1
Electrical lifetime:	50 000 cycles of operation
Protection class:	II
Contacts:	2 NC / 2 NO
Standards:	According to EN/IEC 61058-1
Thermal current Ith:	5 A, according to EN / IEC 60947-5-1 The maximum current in continuous operation and at ambient temperature not exceeding the quoted maximum values.
Electric strength:	3000 VAC, 50 Hz, 1 min. between all terminals and earth, according to EN/IEC 61058-1
Switching voltage and switching current:	250 VAC, 5 A (ohmic) 250 VAC, 2 A (inductive, cos(phi) = 0.7) 220 VDC, 0.1 A (inductive, L:R = 30 ms) 110 VDC, 0.2 A (inductive, L:R = 30 ms) 60 VDC, 0.7 A (inductive, L:R = 30 ms) 24 VDC, 2 A (inductive, L:R = 30 ms)

MECHANICAL CHARATERISTIC

Switching positions:	2 positions
Tightening torque:	Fixing nut max. 0.25 Nm
Weight:	0.031 kg
Operating Travel:	ca. 90°
Contact material:	Gold

Switching action:	Rest (a) - Maintained (a)
Mechanical lifetime:	1 Mio. cycles of operation
Terminal:	Soldering terminal
Switching system:	Self-cleaning, double-break snap action switching system, 1 normally closed and 1 normally open contact per element.
Operating force:	5 N ... 8 N, depending on the number of switching elements
Switching system:	Snap-action switching element
Switching angle:	90° right


AMBIENT CONDITION

Climate resistance:	Standard condition, as per DIN EN 60068-2-78 Standard cyclic, as per DIN IEC 60068-2-30
Operating temperature:	– 25 °C ... + 55 °C, mounted as a block, make sure the heat can escape freely
Shock resistance:	Max. 150 m / s^2, pulse width 11 ms, 3-axis, (semi-sinusoidal as per EN IEC 60068-2-27)
IP front protection:	IP65, according to DIN EN 60529
Storage temperature:	– 40 °C ... + 85 °C
Vibration resistance:	Max. 100 m / s^2 from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)


CERTIFICATE

Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)
Approbations:	CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL


OTHER

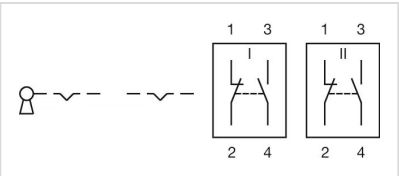Housing colour:	Black
Short Description:	Actuator, Nature, Aluminium, anodised, 2 NC / 2 NO, Rest (a) - Maintained (a), Soldering terminal, IP65, according to DIN EN 60529
max. number of switching elements:	2
Hints:	Lock numbers 1001, lock type KABA
Wiring diagrams:	

Switching positions:

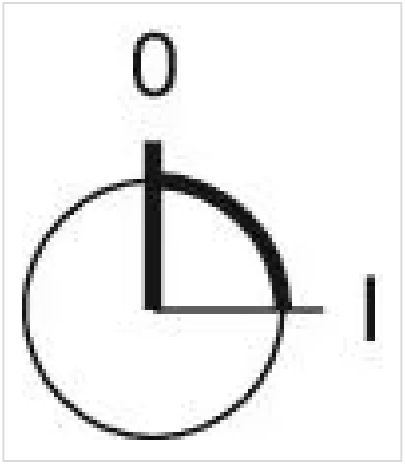

Mounting cut-outs:

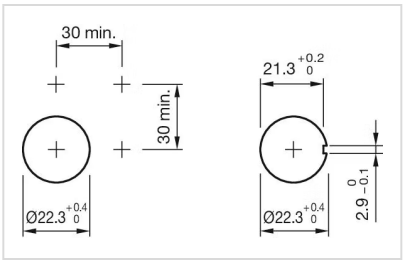

Dimension drawings:

