



CII

TE Internal #: 1472962-1

Time Delay Relays, Knob, 48VDC Input Voltage, 48VAC Input Voltage, 10A Contact Current Rating, On-Delay, .5 - 15 seconds Delay Time, Socket

[View on TE.com >](#)

Relays & Contactors > Relays > Time Delay Relays



Type of Control: Knob

Input Voltage: 48 VDC

Contact Current Rating: 10 A

Mode of Operation: On-Delay

Features

Configuration Features

Contact Arrangement	2 Form C, DPDT, 2 C/O
---------------------	-----------------------

Electrical Characteristics

Input Voltage	48 VDC
Contact Current Rating	10 A

Termination Features

Relay Connection Type	Plug-In
-----------------------	---------

Mechanical Attachment

Product Mount Type	Socket
--------------------	--------

Dimensions

Product Width	50 mm[1.97 in]
Product Length	50 mm[1.97 in]
Product Height	101 mm[3.95 in]

Usage Conditions

Operating Temperature Range	-30 - 65 °C
-----------------------------	-------------

Operation/Application

Repeatability (Max)	±1% ±4 msec
Actuating System	AC, DC



Type of Control	Knob
Mode of Operation	On-Delay
Delay Time	.5 - 15 seconds

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 5-1437470-3
[SSC12ACA=120V 50/60HZ 1/30 SEC](#)

Customers Also Bought


SSC12FBA

Time Delay Relays, Knob, 48VDC Input Voltage, 48VAC Input Voltage, 10A Contact Current Rating, On-Delay, .5 - 15 seconds Delay Time, Socket






TE Part # 4-1437470-6
SSC12ABA=120V 50/60HZ .5/15 SE

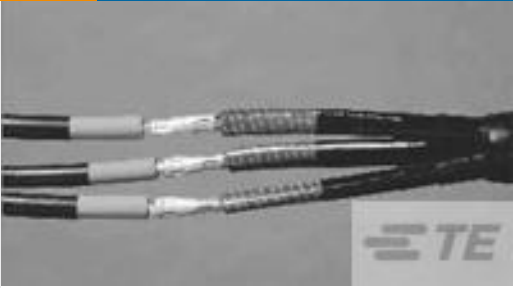

TE Part # 924763-000
HVS-T-1582S



TE Part # EE0443-000
Thick-Wall Heat Shrink Tubing

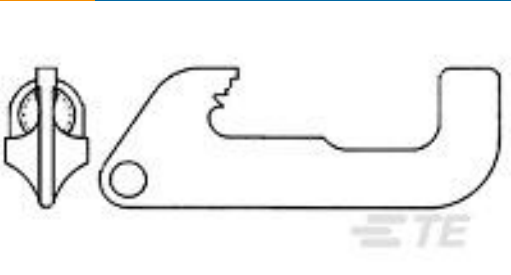

TE Part # 47667-8
SML HD FRG-MC-HT-MGFL-SP-BOC-MRK-PNT




TE Part # 629995-000
GHFC-3-90(B18)



TE Part # 9-1437470-3
SSC12AMA=120VAC 50/60HZ .5/15



TE Part # 661245-000
HVES-1524D

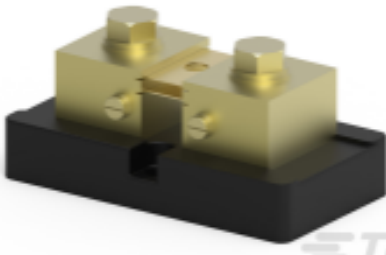

TE Part # CG3315-000
CI-TM40050

Documents

Product Drawings

SSC12FBA="RLY,ON,2P,48VAC/48VD

English

Datasheets & Catalog Pages

5-1773450-5_sec12_SSC

English