


Assembly Specifications	
Temp Rating	-20 to 80 C
Max Voltage	60V
Max Current	3A
IP Protection	IP 67
Length (L)	394in / 10008mm
Tolerance	+4.0in -4.0in


Wiring Schematic		
A Pin #	Conductor Color	B Pin #
1	Black	1
2		2
3	Blue	3
4	Orange	4
5		5
6		6
7		7
8		8
Shield	Attached	Shield

Cable Specifications	
Cable Jacket	PVC
Cable OD	0.19in / 4.8mm
No. /Gauge	M46B-424
Conductor Jacket	PVC
Shielding	Yes

A SIDE

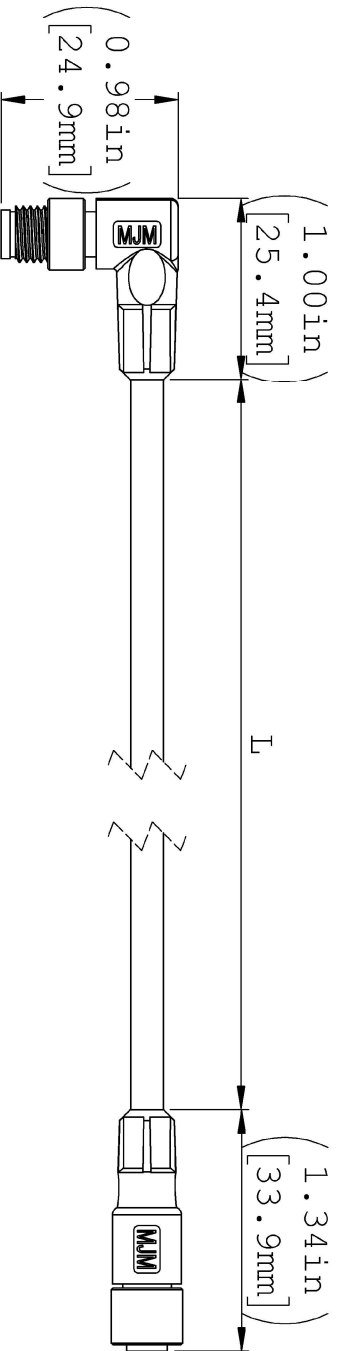

B SIDE

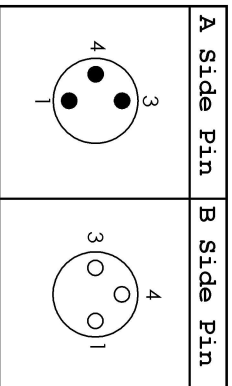

- Notes**
- 1) Connector pin view is from front of connector
 - 2) Not for interrupting current
 - 3) Some options and features may not be shown
 - 4) Additional technical details available upon request; Consult Factory
 - 5) Dimension in parentheses are for reference only



Date Gen: 4/18/24

REV	BY	DATE	DESCRIPTION
0	MMG	01/04/22	Initial Release
1	MMG	03/16/22	Production Release

Tolerance Unless Otherwise Specified
 0.00 = +/- 0.13
 0.000 = +/- 0.050
 ANGLES = +/- 5
 Secondary Unit for Reference Only

MJM Industries

1200 East St, Fairport, OHIO 44077
 PH: (440) 350-1230 www.mjmindustries.com

Part Number:
M08A03M9-0394B-M08A03F1

Description:
 M08 A Coded 3 Position Male 90 to M08 A Coded 3 Position Female Straight with 394in of PVC Cable