Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

45-
2736.1910.000



https://digikey.eao.com/p/45-2736.1910.000

Your product:



45-2736.1910.000
Actuator

FRONT

Front dimension:	Ø 40 mm
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	raised

OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens colour:	Black
Lens shape:	mushroom-head
Lens material:	Plastic
Lens optics:	opaque

MECHANICAL CHARATERISTIC

Weight:	0.051 kg
Switching action:	Maintained
Release type:	Twist to unlock
Mechanical lifetime:	300 000 cycles of operation
Operating frequency:	Max. 600/h


AMBIENT CONDITION

IP front protection:	IP66, IP67, IP69K
Operating temperature:	– 25 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 80 °C
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6
Vibration resistance:	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms


OTHER

Dimension:	Ø 40 mm
Housing material:	Plastic
Short Description:	Actuator, Ø 40 mm, mushroom-head, non illuminative, Black, Plastic, opaque, Black, Plastic, Maintained, IP66, IP67, IP69K, Twist to unlock
Hints:	Application as per DIN EN ISO 13850 and EN 60204-1


Mounting cut-outs:

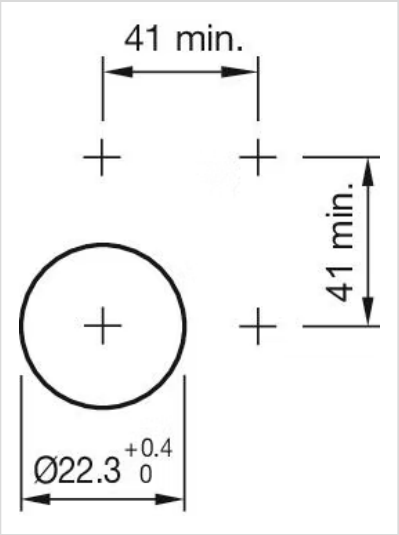

Wiring diagrams:

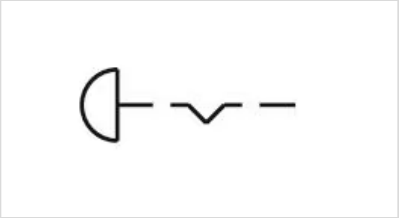

Dimension drawings:

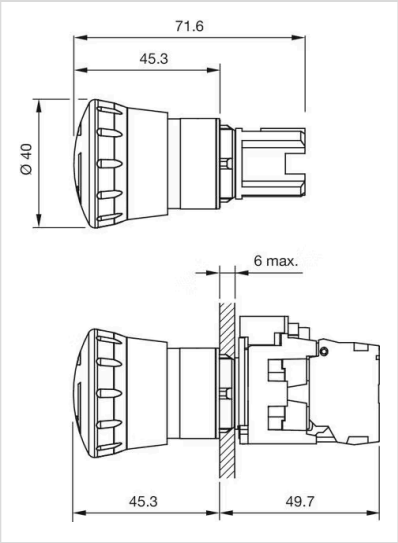
71.6
45.3
Ø 40
6 max.
45.3
49.7