
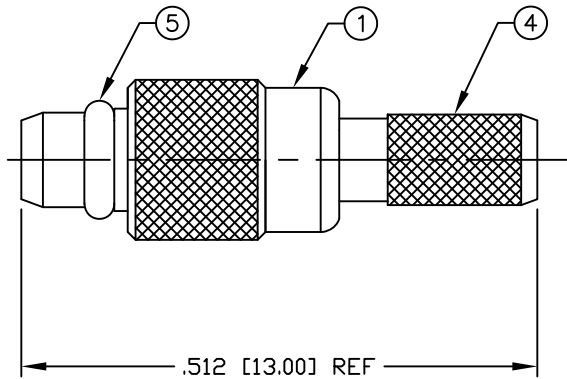

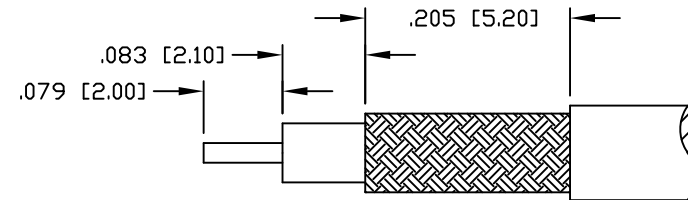


PART NO.

RMX-9000-1B1

REV	DESCRIPTION	DWN	DATE	APPROVED
—	ENGINEERING RELEASE	CZS	01/15/15	JDMc

CONTACT TO BE SOLDEREDRECOMMENDED CRIMP SIZE: .130"RECOMMENDED STRIPPING DIMENSIONSSPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: DC–6 GHz
 VSWR: 1.2 Max.
 VOLTAGE RATING: 170 V rms Max @ Sea Level
 FOR RG–316/U DOUBLE SHIELD CABLE

6	FERRULE	1	COPPER	GOLD, 3μ "
5	RETAINING RING	1	Be.Cu.	GOLD, 3μ "
4	FERRULE STUD	1	BRASS	GOLD, 3μ "
3	PIN	1	BRASS	GOLD, 30μ "
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	GOLD, 3μ "
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

DRAWN C. ZUNIGA	01/15/15
CHECKED	
ORJ DRAWN C. ZUNIGA	01/15/15

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

MMCX CRIMP PLUG

SIZE	CABLE GROUP	DWG NO.	REV
A	B1	RMX-9000-1B1	—
SCALE: NTS	ENGINEERING ID: 001808	SHEET 1 OF 1	