


# SET/SETS Hexalobular Socket Head Cap Screws with Extreme Low Profile

SUS Stainless steel Protrusion

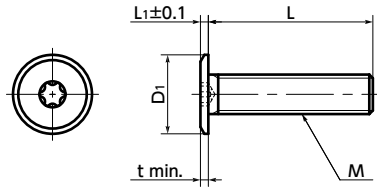

- Application  
Reducing the size of equipment and devices

• Material/Finish RoHS

	SET-NI	SET-BNI	SETS
Main Body	SWCH Nickel Plating	SWCH Black Nickel Plating	SUSXM7 (Equivalent to SUS304)

- Hexalobular socket\*1 head cap screws with ultra-thin head.
- For space-saving of equipment/devices and applications with limited overhead space.
- Hexalobular socket shapes\*1 are designed to withstand high tightening torque. → P.xxxx
- Install and remove with **SKX** Dedicated Wrench or **SKXB** Dedicated Bit and **SRD** Dedicated Magnetic Screwdriver together.
- Use the **SKX-N** hexalobular wrench for extremely limited access spaces for mounting and removing in tight spaces.
- Also, products with special specifications such as ventilation holes, dimensions, shapes, materials, surface treatments, cleanroom washing & packaging are available. → P.xxxx



\*1 : The hexalobular shape is prescribed by JIS B 1015: 2008(ISO 10664: 2005)"Hexalobular internal driving feature for bolts and screws".



**SET-NI** Steel - Nickel Plating Unit : mm

Part Number	M (Coarse)		L				D1	L1	Applicable wrench	Hexalobular Socket No.	t	Max. Torque (N·m)	Mass (g)	Qty per pack
	Nominal of Thread	Pitch	6	8	10	12								
<b>SET-M3-NI</b>	M3	0.5	6	8	10		7	0.8	SKX-6	6	0.75	0.7	0.39 - 0.56	20
<b>SET-M4-NI</b>	M4	0.7	6	8	10	12	16	8	0.9	SKX-8	8	2.3	0.65 - 1.4	20
<b>SET-M5-NI</b>	M5	0.8		8	10	12	16	9	1	SKX-10	10	4	0.73 - 1.7	20

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

**SET-BNI** Steel - Black Nickel Plating Unit : mm

Part Number	M (Coarse)		L				D1	L1	Applicable wrench	Hexalobular Socket No.	t	Max. Torque (N·m)	Mass (g)	Qty per pack
	Nominal of Thread	Pitch	6	8	10	12								
<b>SET-M3-BNI</b>	M3	0.5	6	8	10		7	0.8	SKX-6	6	0.75	0.7	0.39 - 0.56	20
<b>SET-M4-BNI</b>	M4	0.7	6	8	10		8	0.9	SKX-8	8	0.9	2.3	0.65 - 0.95	20
<b>SET-M5-BNI</b>	M5	0.8		8	10	12	16	9	1	SKX-10	10	4	0.73 - 1.7	20

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

**SETS** Stainless Steel Unit : mm

Part Number	M (Coarse)		L				D1	L1	Applicable wrench	Hexalobular Socket No.	t	Max. Torque (N·m)	Mass (g)	Qty per pack
	Nominal of Thread	Pitch	4	5	6	8								
<b>SETS-M2</b>	M2	0.4	4	5	6	8	10	12						
<b>SETS-M2.6</b>	M2.6	0.45	4	5	6	8	10	12						
<b>SETS-M3</b>	M3	0.5			6	8	10	12	16					
<b>SETS-M4</b>	M4	0.7			6	8	10	12	16	20	25			
<b>SETS-M5</b>	M5	0.8			8	10	12	16	20	25	30			
<b>SETS-M6</b>	M6	1			8	10	12	16	20	25	30	35	40	

• When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

Individual Sales → P.xxxx Cleanroom Wash & Packaging → P.xxxx Screw Length Adjustment → P.xxxx Vibration Resistant → P.xxxx Modification process for captive use → P.xxxx  
Available / Add'l charge Available / Add'l charge Available / Add'l charge Available / Add'l charge Please feel free to contact us

• Related Products

**SKX** Hexalobular Wrench



**SKX-N** Hexalobular Wrench for Extremely Limited Access Spaces



**SKXB** Hexalobular Short Bit



**SRD** Magnet Screwdriver



• Part number specification

**SET-M3-8-NI**