
PAF	RF-ATN-NMF-5W10							
REV	DESCRIPTION	DWN	DATE	APPROVED				
_	ENGINEERING RELEASE	CZS	10/10/18	JDMc				

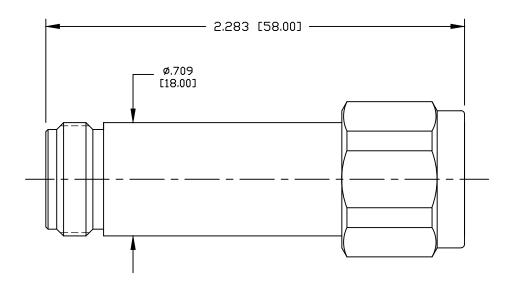

SPECIFICATIONS:

IMPEDANCE: 50 OHMS FREQUENCY RANGE: 0-3 GHz POWER: 5 WATT (AVERAGE)

VSWR MAX: ≤1.2:1 ATTENUATION: 10dB ACCURACY: ±1.0dB

OPERATING TEMPERATURE: -30°C TO +65°C

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN C. ZUNIGA	10/10/18
CHECKED	
ORJ DRAWN C. ZUNIGA	10/10/18

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES, ANY VIOLATION IS
PUNISHABLE UNDER US.
COPPRIGHT LAWS. COPYRIGHT LAWS.



7610 MIRAMAR RD.

5 WATT ATTENUATOR N MALE TO N FEMALE 10dB

SIZE	CABLE	GROUP	RF-ATN-NMF-5W10		ı	REVISION		
SCALE: NTS		ENGINEE	RING ID:	000000	SHEET	1	OF	1