
PART NO. RF-ATN-NMF-5W3									
REV	DESCRIPTION	DWN	DATE	APPROVED					
_	ENGINEERING RELEASE	CZS	10/10/18	JDMc					

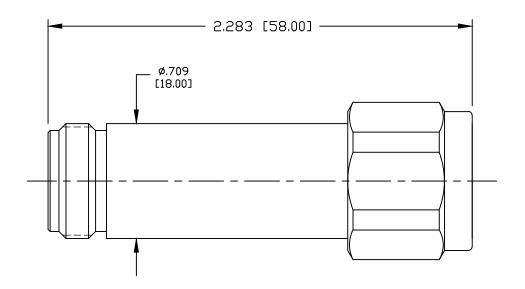

# **SPECIFICATIONS:**

IMPEDANCE: 50 OHMS FREQUENCY RANGE: 0-3 GHz POWER: 5 WATT (AVERAGE)

VSWR MAX: ≤1.2:1 ATTENUATION: 3dB ACCURACY: ±0.8dB

OPERATING TEMPERATURE: -30°C TO +65°C

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

### CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

7412 [1111221111	
<b>DRAWN</b> C. ZUNIGA	10/10/18
CHECKED	
<b>orj drawn</b> C. ZUNIGA	10/10/18

## PROPRIETARY AND CONFIDENTIAL

THIS DRAVING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAVING IS EXPRESSLY
PROHIBITED VITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES, ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPPRIGHT LAYS. COPYRIGHT LAWS.



# **5 WATT ATTENUATOR** N MALE TO N FEMALE 3dB

SIZE	SIZE CABLE GROUP DWG NO.						REVISION		
А			RF-	-ATN-I	NM.	F-5W	/3	_	_
SCALE:		ENGINEE	RING ID:	000000		SHEET	1	OF	1